


GANTRY CRANE_Crane

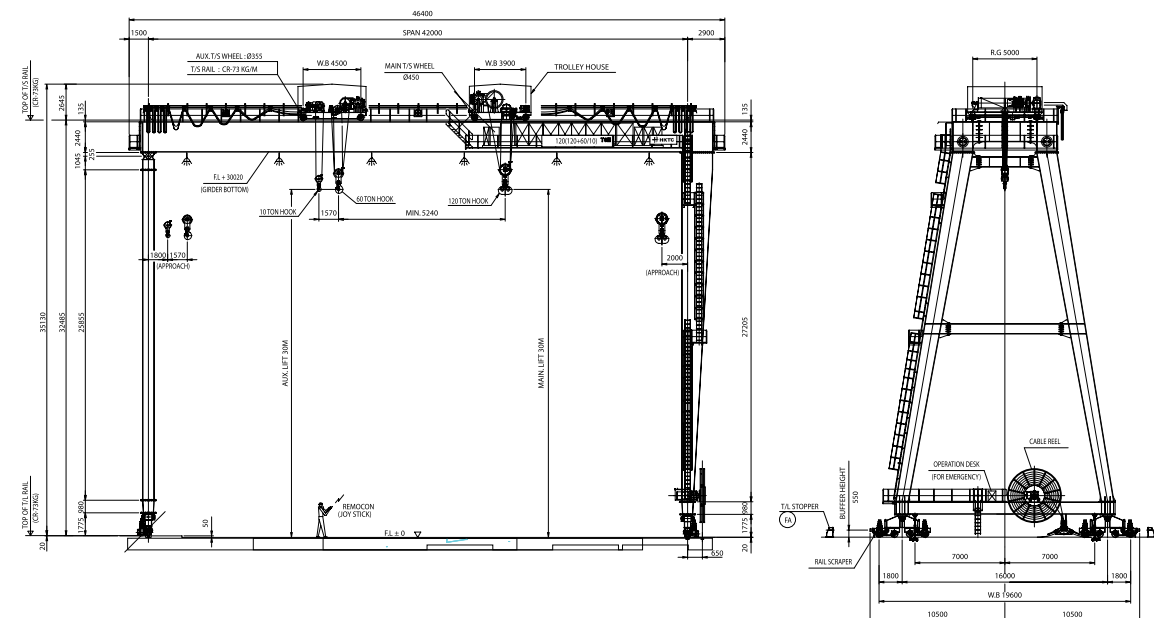

CAPACITY	120(120+60/10)TON					
TEST LOAD	150(150+75/12.5)TON					
LIFT	MAIN	30m	AUX(1)	30m	AUX(2)	30m
SPAN	42m					
	SPEED(m/min)		MOTOR		BRAKE + CONTROL	
MAIN HOISTING	3.5/6		93kW X 6P		A.C-D.C MAGNT + INVERTER	
AUX. HOISTING(1)	4.5/8		55kW X 6P		A.C-D.C MAGNT + INVERTER	
AUX. HOISTING(2)	12		30kW X 6P		A.C-D.C MAGNT + INVERTER	
MAIN TRAVERSING	30		11kW X 6P		THRUSTOR + INVERTER	
AUX. TRAVERSING	30		7.5kW X 6P		THRUSTOR + INVERTER	
TRAVELLING	30		8-5.5kW X 6P		D.C MAG.DISC + INVERTER	
RAIL	T/S		CR-73kg		T/L CR-73kg	
WIRE ROPE	MAIN		JIS G 3525Ø30, 6 X Fi(29), IWRC B, Z-LAY, 12PARTS			
	AUX(1)		JIS G 3525Ø25, 6 X Fi(29), IWRC B, Z-LAY, 8PARTS			
	AUX(2)		JIS G 3525Ø16, 6 X Fi(29), IWRC B, Z-LAY, 4PARTS			
OPERATION	REMOTE CONTROL(JOY STICK) + P/B S/W(FOR EMERGENCY)					
POWER	A.C440V, 60HZ, 3PHASE					
TRAVELLING LENGTH	197m					