


* Altezza max ancorata - Hauteur max ancrée - Max height anchored - Max Höhe verankert - Altura max arriostrada

SCHEMA DI MONTAGGIO

MONTAGE - ERECTION - MONTAGE - MONTAJE

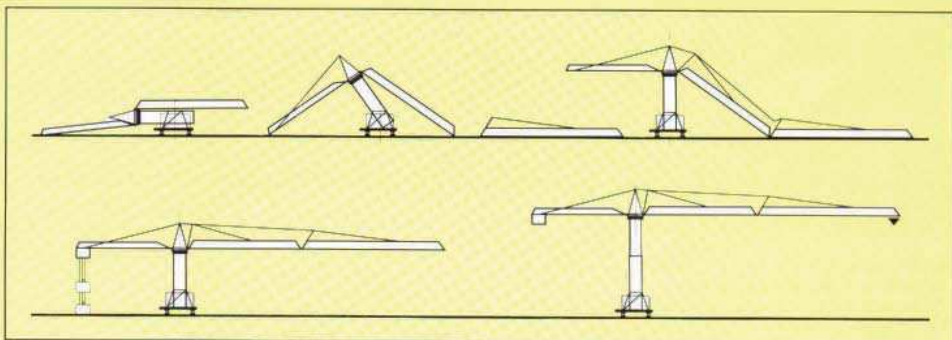

SGA	Kg	800	1000	1200	1500	1750	2000
(A) 45 m	m		36,7	31,5	26,0	22,7	20,2
(B) 42 m	m			35,2	29,0	25,4	22,5
(C) 37 m	m				29,9	26,1	23,2
(D) 32 m	m					27,2	24,2

		5 m/min	2000 Kg	8 Kw		1 ^a 0,3 rpm	2,9 Kw			380 V – 50 Hz - 15 Kw
		20 m/min	2000 Kg		2 ^a 0,8 rpm	Z1				21000 ÷ 33000 Kg
		40 m/min	1100 Kg		1 ^a 21 m/min	1,5 Kw	Z2			3300 ÷ 3900 Kg
						2 ^a 42 m/min				14600 Kg
						1 ^a 25 m/min	2x1,5 Kw			24000 daN

ALIMENTAZIONE TRIFASE
ALIMENTATION TRIPHASE
THREE-PHASE SUPPLY
DREI-PHASE SPANNUNG
ALIMENTACION TRIFASICA

Z1 = PESO ZAVORRA BASE
POIDS LEST DE BASE
BASE BALLAST WEIGHT
GEWICHT GRUNDBALLAST
PESO LASTRE DE BASE

Z2 = PESO ZAVORRA CONTROBRACCIO
POIDS LEST DE CONTRE-FLECHE
COUNTERJIB BALLAST WEIGHT
GEWICHT GEGENAUFLERBALLAST
PESO LASTRE CONTRA FLECHA

= PESO TOTALE (esclusa zavorra)
POIDS TOTAL (sans lest)
TOTAL WEIGHT (without ballast)
GESAMTGEWICHT (ohne Ballast)
PESO TOTAL (sin lastre)

POTENZA ACUSTICA CONFORME ALLA DIRETTIVA 87-405-CEE
NIVEAU ACOUSTIQUE CONFORME À LA DIRECTIVE CEE 87-405
SCHALL-LEISTUNGSEGEL GEMÄß EG-RICHTLINIE 87-405

NOISE LEVEL IN COMPLIANCE WITH THE EEC INSTRUCTION 87-405
NIVEL ACUSTICO CONFORME CON LA DIRECTIVA CEE 87-405



La Ditta si riserva di apportare modifiche senza alcun preavviso.

La maison se réserve d'apporter des modifications sans aucun préavis.
Die Firma behält sich das Recht vor, Änderungen ohne vorherige Mitteilung durchzuführen.

The Company reserves the right to modify specifications without prior notice.
La Empresa se reserva el derecho de modificar los datos sin previo aviso.

Courtesy of CraneMarket.com