

# DUR-A-LIFT®



## DTAX 39/44 DTAXS 39/44

TELESCOPIC ARTICULATING AERIAL LIFT  
INSULATED OR NON-INSULATED

### Superior Height Superior Reach

Telescopic Articulating design for greater side reach and working heights, providing up and over capabilities. Available in insulated or non-insulated models.

**180°  
Rotating  
Basket**

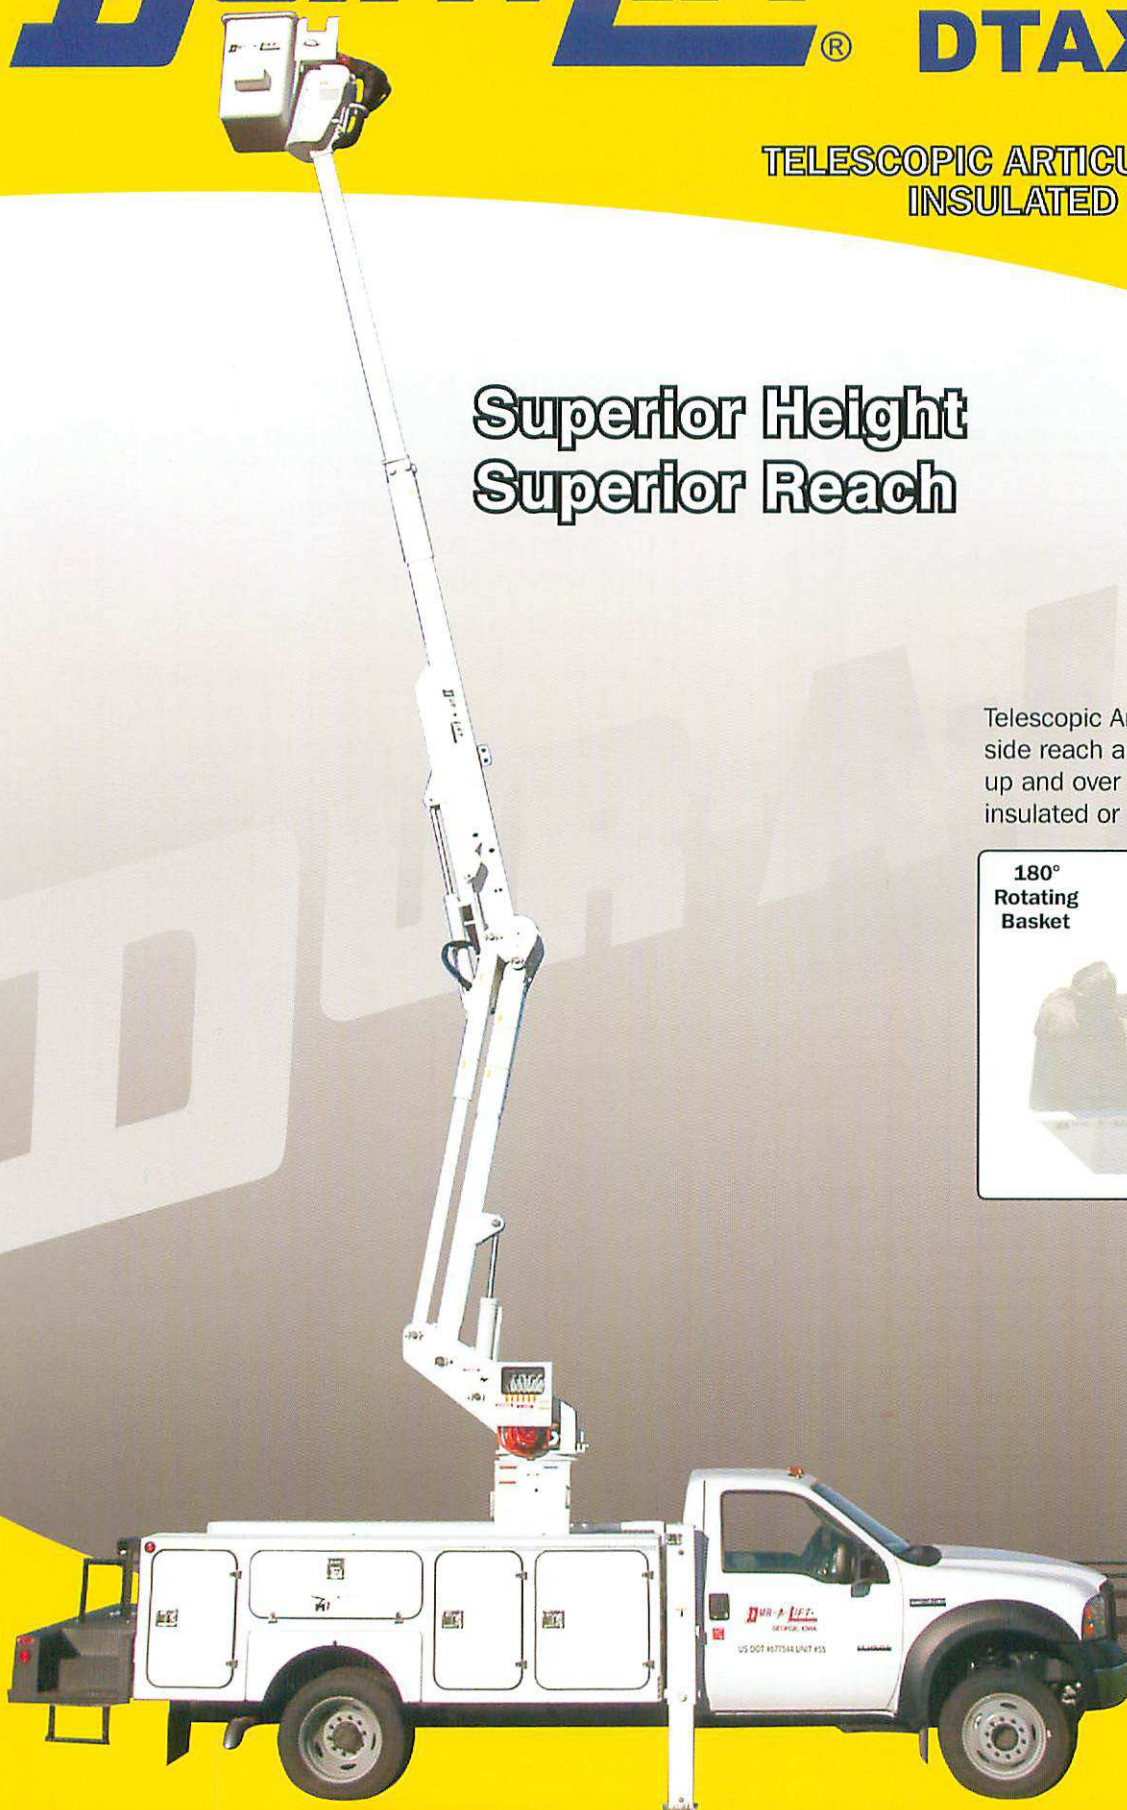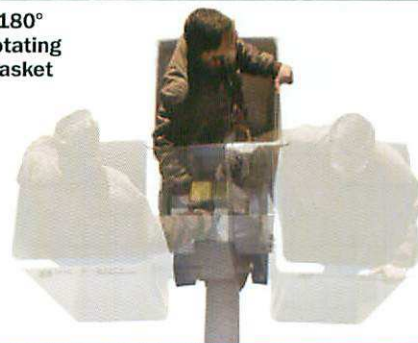

[sales@dur-a-lift.com](mailto:sales@dur-a-lift.com)  
[www.dur-a-lift.com](http://www.dur-a-lift.com)

Dur-A-Lift Inc, P.O. Box 31, George, Iowa 51237  
(877) 4-DURALIFT (877) 438-7254 | Fax: (712) 475-2809

Courtesy of Crane.Market




## SPECIFICATIONS

	DTAX 39 DTAXS 39	DTAX 44 DTAXS 44
Height to Bottom of Platform	39'	44'
Working Height	44'	49'
Side Reach	28'	30'
Stowed Travel Height	10'	10'
Basket Capacity	350 lb.	350 lb.
Approximate Weight	2450 lb.	2800 lb.
Articulating Arm Travel	0° to 80°	0° to 80°
Main Boom Travel	-25° to +78°	-25° to +78°
Extension Travel	108"	120"

Minimum GVWR will change significantly depending on make of chassis and stabilizer option. Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or exceeds all applicable ANSI Standards as of the date of manufacture.



Reach Diagram

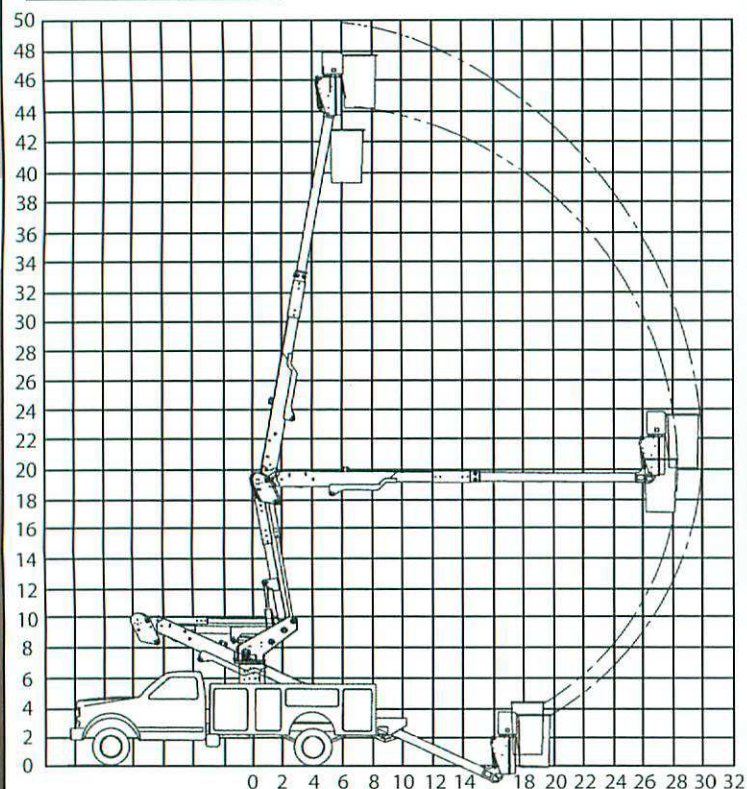

## CONTROLS

- Full pressure proportional controls
- Lower controls with override located at the turntable
- Engine start/stop from the basket

## HYDRAULIC SYSTEM

- Rated pressure is 2200 PSI
- Operating pressure is 2000 PSI
- 5 GPM pump requirement
- 10 gallon oil reservoir
- 180° rotating basket

## MECHANICAL SYSTEM

- Telescoping and articulating boom action
- Offset main boom reduces travel height
- Shear ball rotation driven by fully enclosed worm gear box

## SAFETY FEATURES

- Integral holding valves in all cylinders
- Pressure relief valve
- Non-conductive hoses
- 46KV Category "C" on insulated models
- Safety harness and lanyard
- Lower override controls
- Fiberglass extension boom

## Options

- Continuous rotation
- 12 volt D.C. backup
- Outriggers
- Single hand controls
- Basket liner
- Throttle advance
- Fiberglass main boom
- Fiberglass articulating boom
- Non-insulated units available

This aerial lift is sold and serviced by: