




Standard

-
-
-
-
-
-
-
-


Optional

-
-
-
-
-
-


2S

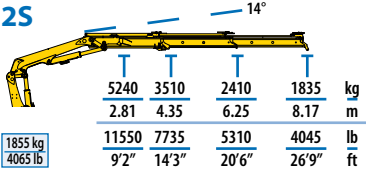


3S

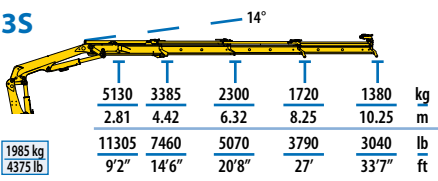

4S









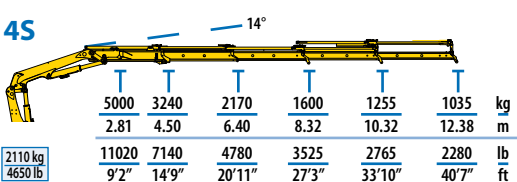


5S

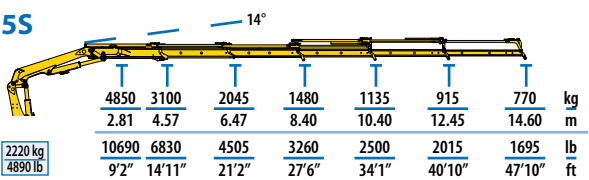

MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	15,26	400	2295	2495	810	5960	15
3S	14,97	400	2295	2495	810	5960	15
4S	14,57	400	2295	2495	810	5960	15
5S	14,17	400	2295	2505	920	5960	15

MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	110410	400	90	98	32	235	33100
3S	108320	400	90	98	32	235	33100
4S	105420	400	90	98	32	235	33100
5S	102530	400	90	99	36	235	33100

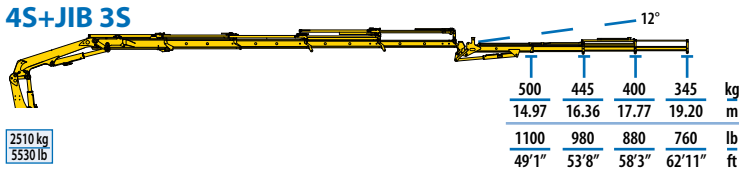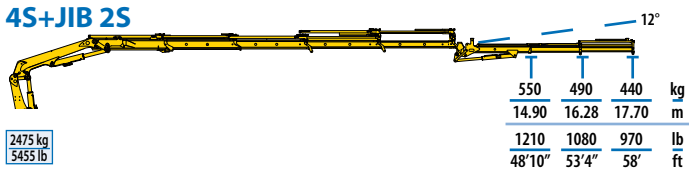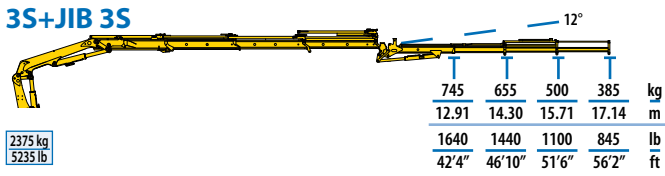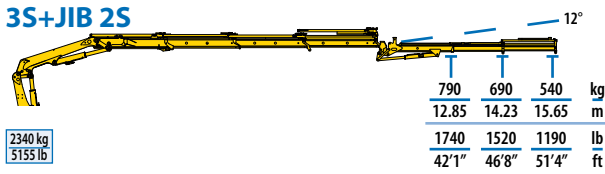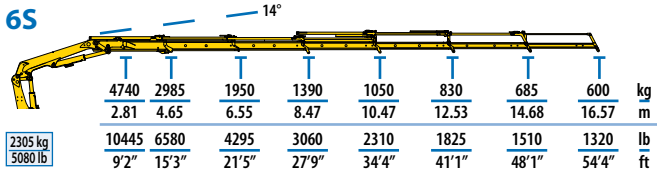

MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	13,88	400	2295	2505	920	5960	15
3S+JIB 2S	14,97	400	2295	2505	910	5960	15
3S+JIB 3S	14,97	400	2295	2505	910	5960	15
4S+JIB 2S	14,57	400	2295	2505	910	5960	15
4S+JIB 3S	14,57	400	2295	2505	910	5960	15

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	100430	400	90	99	36	235	33100
3S+JIB 2S	108320	400	90	99	36	235	33100
3S+JIB 3S	108320	400	90	99	36	235	33100
4S+JIB 2S	105420	400	90	99	36	235	33100
4S+JIB 3S	105420	400	90	99	36	235	33100