






Standard




Optional




6S

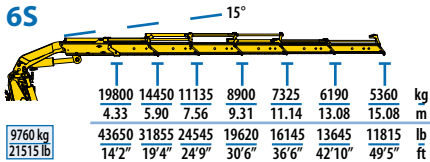


7S

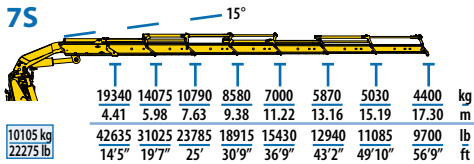

8S

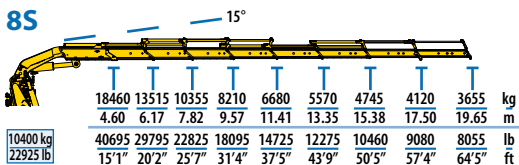



9S

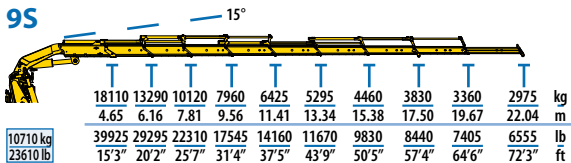



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	85,77	∞	2700	2550	1970	9600	32
7S	85,29	∞	2700	2550	1970	9600	32
8S	84,92	∞	2700	2550	1970	9600	32
9S	84,21	∞	2700	2550	1970	9600	32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	620590	∞	106	100	78	378	70500
7S	617110	∞	106	100	78	378	70500
8S	614440	∞	106	100	78	378	70500
9S	609300	∞	106	100	78	378	70500



6S +JIB 6S

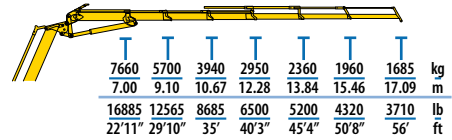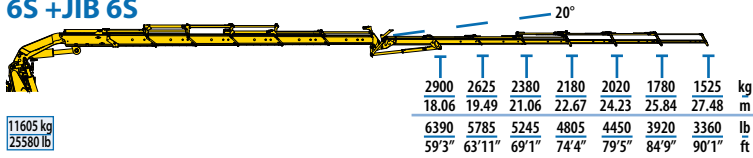



7S +JIB 6S

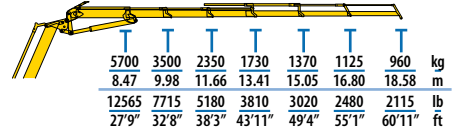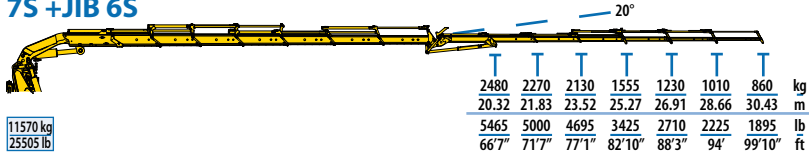

8S +JIB 6S LIGHT

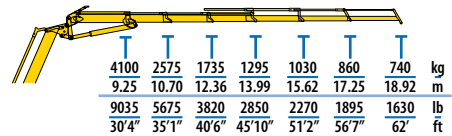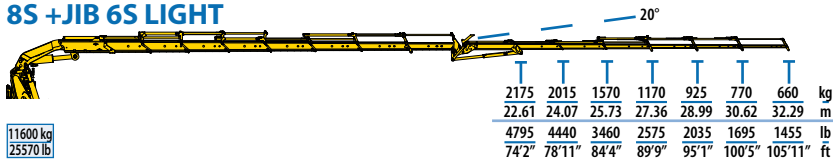

8S +JIB 6S HEAVY DUTY

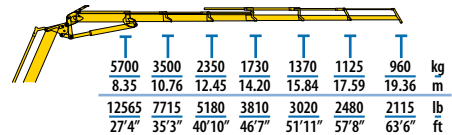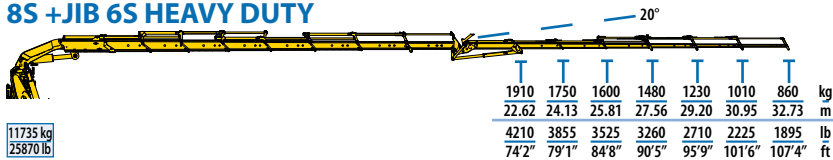

MODEL								
	txm	(°)	mm	mm	mm	mm	t	GVW
6S+JIB 6S	85,77	∞	2920	2550	2195	9600	32	
7S+JIB 6S	85,29	∞	2920	2550	2195	9600	32	
8S+JIB 6S LIGHT	84,92	∞	2920	2550	2195	9600	32	
8S+JIB 6S HD	84,92	∞	2920	2550	2195	9600	32	

MODEL								
	lb*ft	(°)	in	in	in	in	lb	GVW
6S+JIB 6S	620590	∞	115	100	86	378	70500	
7S+JIB 6S	617110	∞	115	100	86	378	70500	
8S+JIB 6S LIGHT	614440	∞	115	100	86	378	70500	
8S+JIB 6S HD	614440	∞	115	100	86	378	70500	