






Standard




Optional




3S





4S

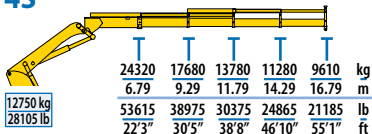



6S

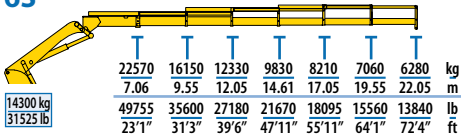



6S+JIB 3S

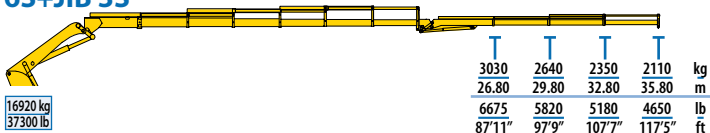

6S+JIB 4S

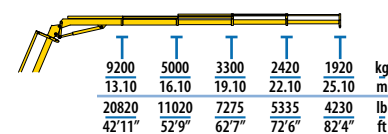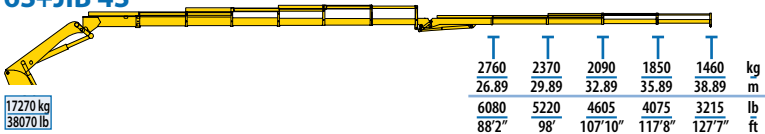

6S+JIB 6S

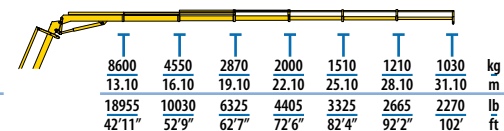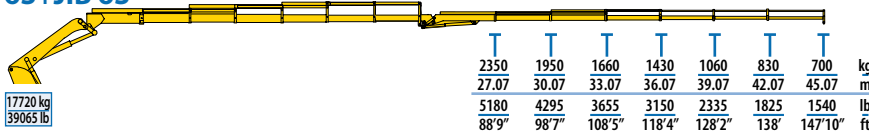

MODEL	GVW						
	txm	(°)	mm	mm	mm	mm	t
3S	171,66	∞	2240	2550	5200	8370 11670	40
4S	165,22	∞	2240	2550	5200	8370 11670	40
6S	159,35	∞	2240	2550	5200	8370 11670	40
6S+JIB 3S	159,35	∞	2360	2550	5200	8370 11670	40
6S+JIB 4S	159,35	∞	2360	2550	5200	8370 11670	40
6S+JIB 6S	159,35	∞	2360	2550	5200	8370 11670	40

MODEL	GVW						
	lb*ft	(°)	in	in	in	in	lb
3S	1242040	∞	88	100	205	330 459	88200
4S	1195450	∞	88	100	205	330 459	88200
6S	1152970	∞	88	100	205	330 459	88200
6S+JIB 3S	1152970	∞	93	100	205	330 459	88200
6S+JIB 4S	1152970	∞	93	100	205	330 459	88200
6S+JIB 6S	1152970	∞	93	100	205	330 459	88200