





Standard



Optional



1S

| | | | | |
|--------------------|------|-------|------|----|
| | 3865 | 2470 | 1740 | kg |
| | 2.67 | 4.34 | 6.12 | m |
| 1330 kg 2930 lb | 8520 | 5445 | 3835 | lb |
| | 8'9" | 14'2" | 20' | ft |

2S

| | | | | | |
|--------------------|------|-------|-------|-------|----|
| | 3725 | 2340 | 1625 | 1225 | kg |
| | 2.67 | 4.41 | 6.19 | 8.09 | m |
| 1450 kg 3195 lb | 8210 | 5155 | 3580 | 2700 | lb |
| | 8'9" | 14'5" | 20'3" | 26'6" | ft |

3S

| | | | | | | |
|--------------------|------|-------|-------|-------|-------|----|
| | 3635 | 2250 | 1525 | 1125 | 905 | kg |
| | 2.67 | 4.48 | 6.27 | 8.16 | 10.06 | m |
| 1545 kg 3405 lb | 8010 | 4960 | 3360 | 2480 | 1995 | lb |
| | 8'9" | 14'8" | 20'6" | 26'9" | 33' | ft |


4S

| | | | | | | | |
|--------------------|------|--------|-------|------|-------|-------|----|
| | 3545 | 2165 | 1430 | 1040 | 810 | 670 | kg |
| | 2.67 | 4.55 | 6.34 | 8.23 | 10.13 | 12.03 | m |
| 1640 kg 3615 lb | 7815 | 4770 | 3150 | 2290 | 1785 | 1475 | lb |
| | 8'9" | 14'11" | 20'9" | 27' | 33'2" | 39'5" | ft |



| MODEL | | | | | | | |
|-------|-------|-----|------|------|-----|--------------|----|
| | txm | (°) | mm | mm | mm | mm | t |
| 1S | 10,73 | 400 | 2220 | 2455 | 805 | 4540 5500 | 12 |
| 2S | 10,33 | 400 | 2220 | 2455 | 805 | 4540 5500 | 12 |
| 3S | 10,09 | 400 | 2220 | 2455 | 805 | 4540 5500 | 12 |
| 4S | 9,86 | 400 | 2220 | 2455 | 805 | 4540 5500 | 12 |

| MODEL | | | | | | | |
|-------|-------|-----|----|----|----|------------|-------|
| | lb*ft | (°) | in | in | in | in | lb |
| 1S | 77640 | 400 | 87 | 97 | 32 | 179 217 | 26500 |
| 2S | 74740 | 400 | 87 | 97 | 32 | 179 217 | 26500 |
| 3S | 73000 | 400 | 87 | 97 | 32 | 179 217 | 26500 |
| 4S | 71340 | 400 | 87 | 97 | 32 | 179 217 | 26500 |



5S

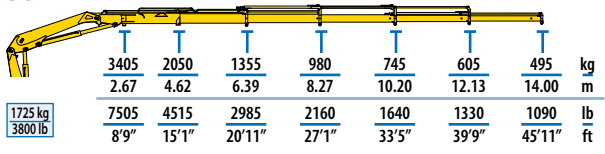



2S+JIB 2S

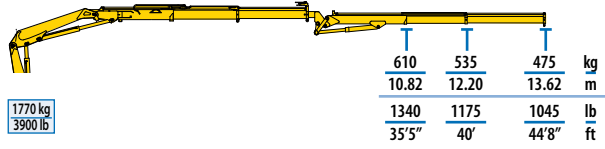



3S+JIB 2S

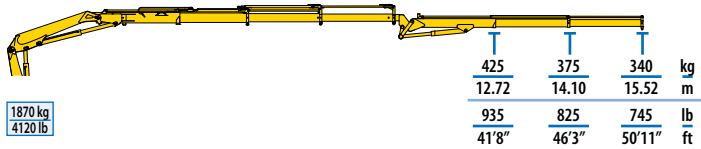

4S+JIB 2S

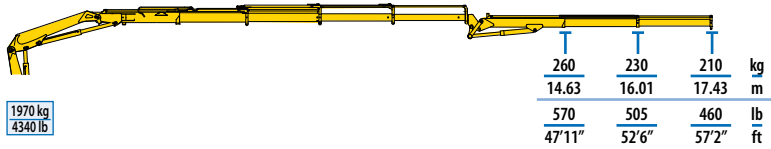

4S+JIB 3S

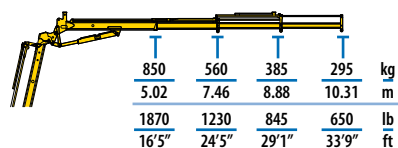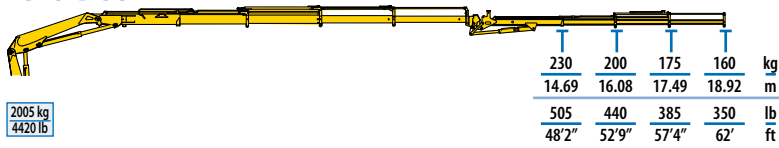

| MODEL | | | | | | | |
|-----------|-------|-----|------|------|-----|--------------|----|
| | txm | (°) | mm | mm | mm | mm | t |
| 5S | 9,48 | 400 | 2220 | 2455 | 890 | 4540 5500 | 12 |
| 2S+JIB 2S | 10,33 | 400 | 2220 | 2455 | 875 | 4540 5500 | 12 |
| 3S+JIB 2S | 10,09 | 400 | 2220 | 2455 | 875 | 4540 5500 | 12 |
| 4S+JIB 2S | 9,86 | 400 | 2220 | 2455 | 875 | 4540 5500 | 12 |
| 4S+JIB 3S | 9,86 | 400 | 2220 | 2455 | 875 | 4540 5500 | 12 |

| MODEL | | | | | | | |
|-----------|-------|-----|----|----|----|------------|-------|
| | lb*ft | (°) | in | in | in | in | lb |
| 5S | 68590 | 400 | 87 | 97 | 35 | 179 217 | 26500 |
| 2S+JIB 2S | 74740 | 400 | 87 | 97 | 34 | 179 217 | 26500 |
| 3S+JIB 2S | 73000 | 400 | 87 | 97 | 34 | 179 217 | 26500 |
| 4S+JIB 2S | 71340 | 400 | 87 | 97 | 34 | 179 217 | 26500 |
| 4S+JIB 3S | 71340 | 400 | 87 | 97 | 34 | 179 217 | 26500 |