
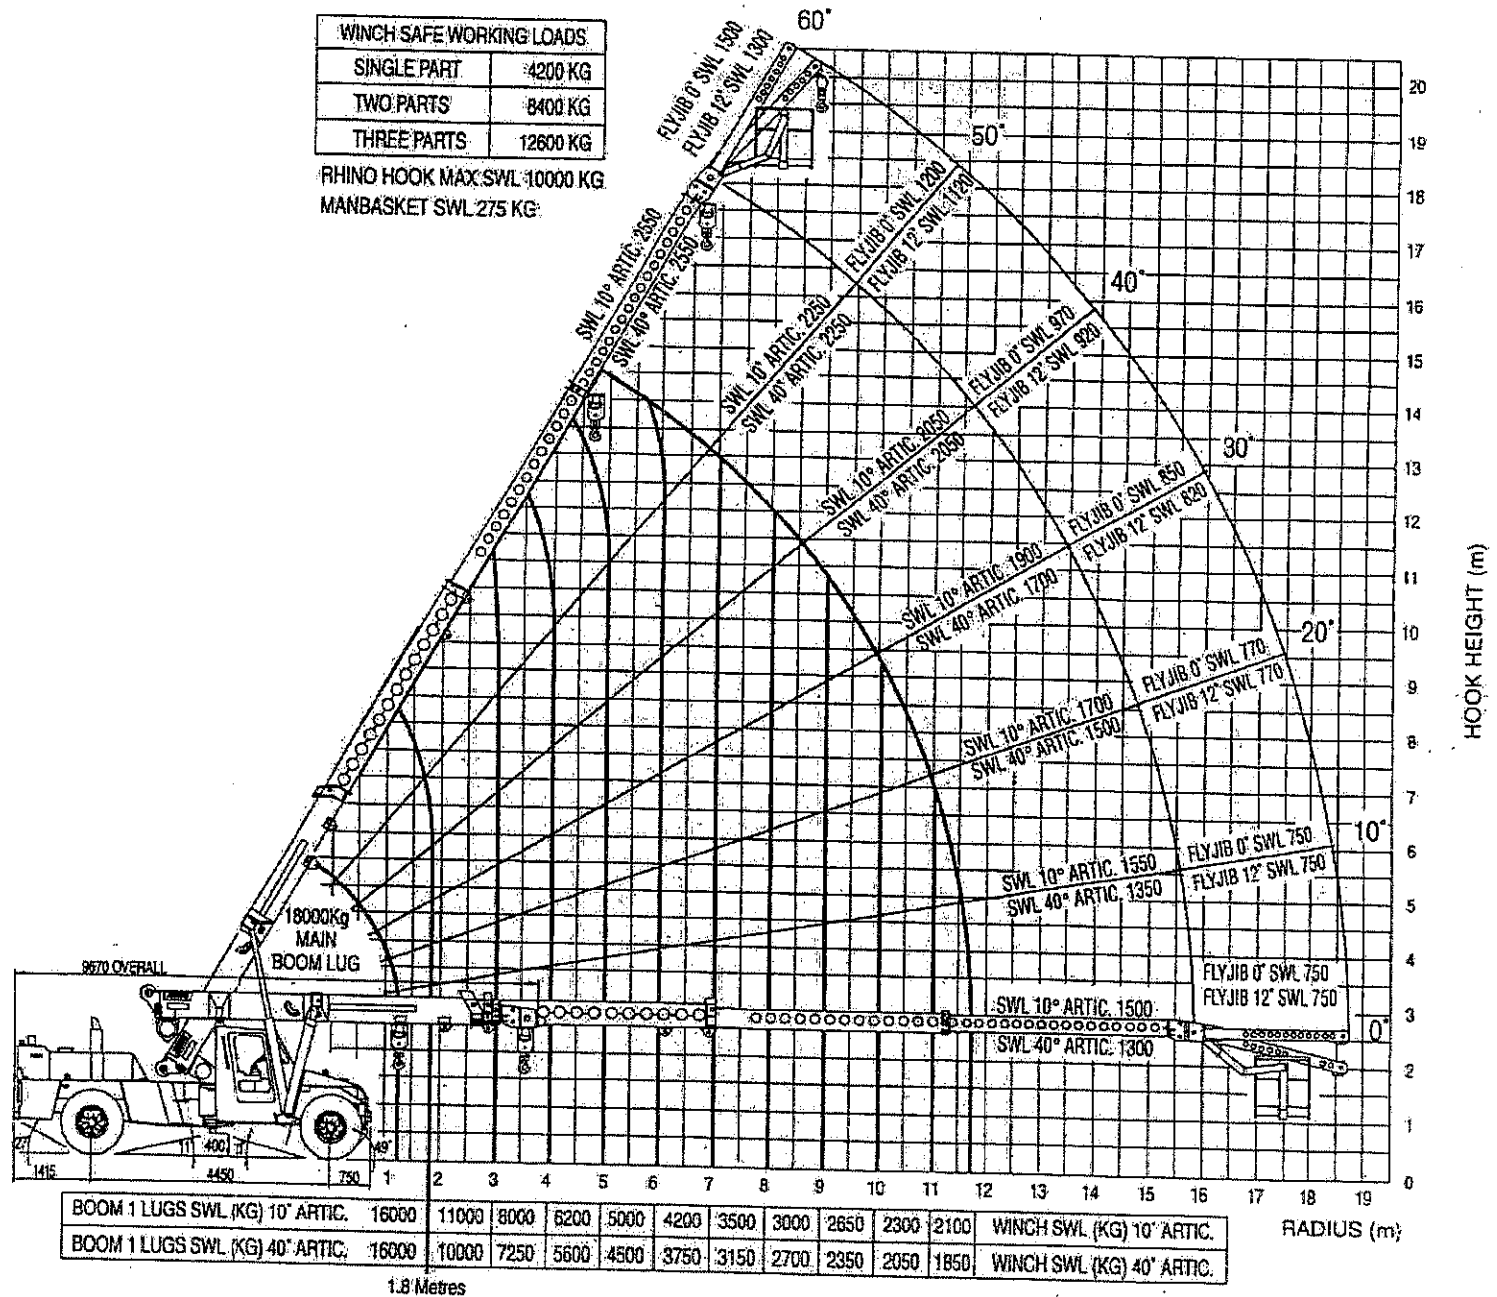


WINCH SAFE WORKING LOADS	
SINGLE PART	4200 KG
TWO PARTS	8400 KG
THREE PARTS	12600 KG

RHINO HOOK MAX SWL 10000 KG
MANBASKET SWL 275 KG



NOTE: 1. UNLESS OTHERWISE STATED ALL SWL'S REFER TO LIFTING ON THE WINCH. FOR LIFTING LUG CAPACITIES PLEASE REFER TO THE SPECIFIC LOADCHART.
2. THIS RADIUS CHART IS A SUMMARY OF LOADCHART 16C1204. REFER TO THE CRANE'S LOADCHART BEFORE ATTEMPTING A LIFT.