



LOWBOY, 55 TON
55LB160206



LOWBOY, 55 TON
3 AXLE, DETACHABLE NON GROUND BEARING,
MAXIMUM PAYLOAD 110,000 LBS



LOWBOY, 55 TON

Features & Benefits



Multi Position Ride Height



Multi Position Ride Height options. Makes adjustments for various 5th wheel heights easy and allows for larger ground clearance or lower deck height.

12" Cross Member Spacing



Standard 12" stubbed cross member spacing produces added strength to the trailer and also less stress on the decking, leading to a longer life of the decking material.

High Quality Steel



Constructed with 100,000 psi yield strength steel for the side rails and main beams. The high tensile steel ensures the designed camber is retained, and allows for a longer product service life.

Centrally Located Fittings



Air, electric and hydraulic (when applicable) fittings are all centrally located at the base of the gooseneck inside a bolster. This makes for quick and easy connect and disconnect. The fittings are protected from possible contact with equipment being loaded or unloaded.

V-Style Guide



V-Style guide with front tapered beams helps position the gooseneck locking pin, which makes hooking up to a Globe Trailer fast and easy. The locking pin guide rim helps prevent the gooseneck locking pin from coming loose in transit.

Added Security



Globe Trailers air lock with safety bar and spring extended pin ensures that the gooseneck locking pin will remain secured even if air pressure is lost.

Air Bags



30,000 pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

Decking Options



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

Heavy Duty Front Outriggers



Globe Trailers fabricated heavy duty pullout front outriggers provide added strength which is needed to accommodate the initial force when loading equipment. The outrigger is held in position with a spring loaded locking pin.

LOWBOY, 55 TON

Features & Benefits



STEMCO Wheel Warranty



5 year wheel end warranty.
Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

Color Coded Hoses



Color coded air hoses allow for easy trouble shooting and maintenance.

Heavy Duty Outriggers



Standard heavy duty outriggers that span the entire height of the side rail allow for maximum force to be applied when in use.

24" Deck Height



With a standard deck height of 24", Globe Trailers have lower overall height, which allows taller loads to be hauled.

Warranty



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

Color Options



Globe Trailers can powder coat to the color of your choice.

Lighting System



All Lighting is LED and mounted in rubber grommets to DOT standards.

Beaver Tail



The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.

Hydraulic Ramps



Hydraulic ramp upgrade available for easier use.


30 Degree Transition



The 30 degree transition allows easier loading to the rear deck for equipment with lower ground clearance.



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

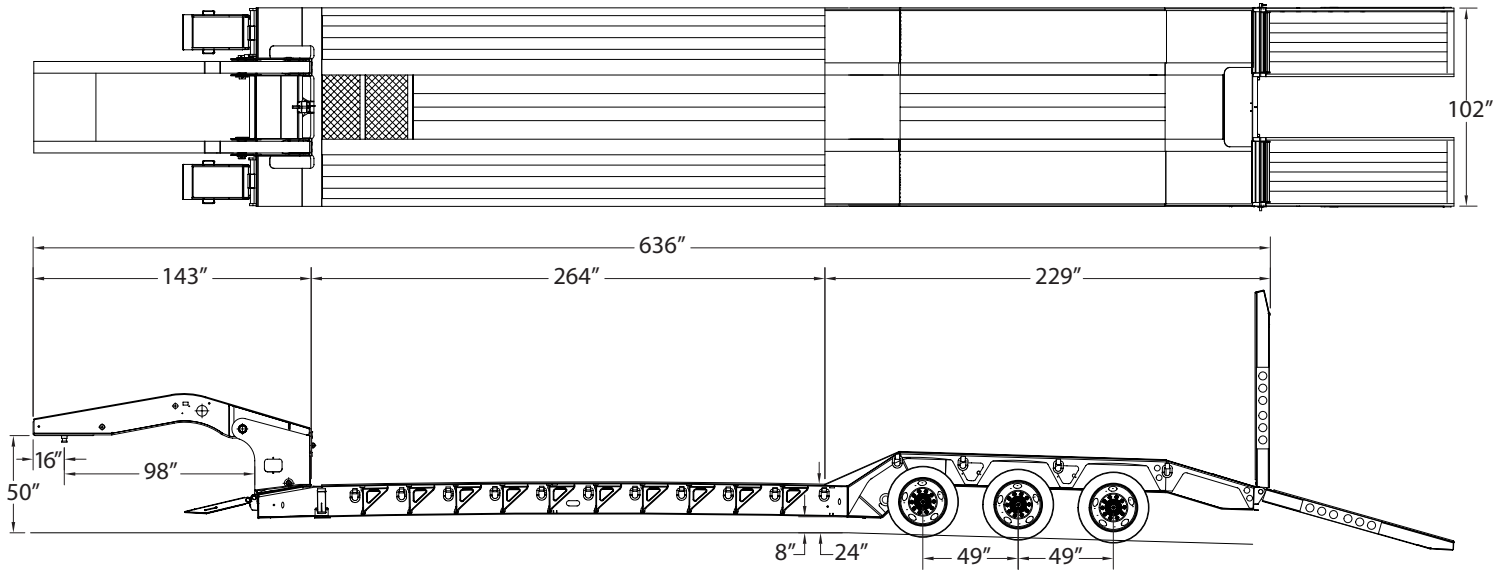

| Overall Length | Overall Width | Gooseneck Length | Lower Deck Length | Lower Deck Height | Rear Deck Length | Rear Deck Height | Ground Clearance |
|----------------|---------------|------------------|-------------------|-------------------|------------------|------------------|------------------|
| 636" | 102" | 143" | 264" | 24" | 229" | 42" | 8" |

| Main Deck | |
|------------------------------------|--------------------------------|
| Main Beam | 16" T-1 Steel |
| Centers | 41" Standard |
| Side Rails | 16" T-1 Steel |
| Crossmembers | 10" & 4" |
| Spacing | 12" |
| Outriggers | Full Height Removable |
| # Of Outriggers | 13 each side |
| # Of D-Rings | 11 each side |
| Front Ramps | Steel, 18" x 31" Std. |
| Rear Deck | |
| Riser | Paver Style transition |
| Rear Deck Beam | 16.5" Steel T-1 |
| Rear Well Style | Level - Flush Across Rear Deck |
| # of D-Rings | 4 each side |
| Rear Deck Options | |
| Beavertail 48" | |
| Rear Ramps 36 x 96 | |
| Hydraulic | |
| Apitong Tread | |
| Decking/Flooring | |
| Main Decking | 1.75", Apitong Full Width |
| Wheel Covers | Steel Cover D-Plate |
| Well Decking | Apitong |
| Electrical | |
| Lights | LED Plus 2 - Rear Strobes |
| Connector | 7 Way Connector |
| Hydraulics | |
| Wet Line Kit - Wing Nut Connection | |

| Axles, Suspension, & Running Gear | |
|-----------------------------------|-------------------------------|
| # of Axles | 3 |
| Axle Spacing | 49" |
| Axle Capacity | 25,000lbs |
| Axle Track | 77 1/2" |
| Brakes | 16 1/2" x 7" - 25K |
| ABS | 2S1M |
| Axle 1 | Fixed Type 30/30 Non-ABS |
| Axle 2 | Fixed Type 30/30 ABS |
| Axle 3 | Lift Type 30 Non-ABS |
| Cush Air Ride Suspension - 25K | |
| Auto Dump | |
| Gooseneck | |
| King Pin Style | Fixed |
| King Pin Setting | 16" |
| Swing Clearance | 98" |
| 5th Wheel Height | 50" |
| King Pin | 2" |
| Ride Height | 4-Position |
| Finish | |
| Sandblast & Powder Coat | |
| Mud Flaps & Reflective Tape | |
| Flag Holders | |
| Tires & Rims | |
| Tires | 255/70R x 22.5 "H" |
| Rims | 8.25 x 22.5 Hub Piloted Steel |

Dealer: