

> Benefits

Use variable outrigger positions to benefit from sector-defined load curves. The result is increased capacities. MAXbase can be retrofitted on all previous crane models equipped with the Crane Control System (CCS).

MAXIMIZE YOUR CRANE'S POTENTIAL

- Get the most out of your crane in even the tightest job sites.
- Position closer to your lift to reduce radius and enjoy better lifting capacities.
 - Enlarge your working area with sector-defined load curves to complete jobs easier than before.
 - MAXbase flexibility allows you to bring fewer accessories to the jobsite lowering your transport expenses.

DISCOVER NEW OPPORTUNITIES

- Fitting into tight and constricted job sites is easier with MAXbase.
- Variable outrigger bases provide greater flexibility.
 - The Crane Control System (CCS) displays the limits of the MaxBase's lifting capacity and offers calculated load charts for each configuration. It also makes it easy to select the right configuration and offers intuitive menu navigation.
 - Simple planning - no guessing: Your projects can be planned for cranes featuring MAXbase either with the Cranimax CraneManager software, via Lift Planning Tools on the Manitowoc Cranes homepage or directly on the crane using the boom configurator!



Manitowoc Cranes

Regional headquarters

Americas

Manitowoc, Wisconsin, USA
Tel: +1 920 684 6621
Fax: +1 920 683 6277
Shady Grove, Pennsylvania, USA
Tel: +1 717 597 8121
Fax: +1 717 597 4062

Europe and Africa

Dardilly, France - TOWERS
Tel: +33 (0)4 72 18 20 20
Fax: +33 (0)4 72 18 20 00
Wilhelmshaven, Germany - MOBILE
Tel: +49 (0) 4421 294 0
Fax: +49 (0) 4421 294 4301

China

Shanghai, China
Tel: +86 21 6457 0066
Fax: +86 21 6457 4955

Middle East and Greater Asia-Pacific

Singapore
Tel: +65 6264 1188
Fax: +65 6862 4040
Dubai, UAE
Tel: +971 4 8862677
Fax: +971 4 8862678/79



This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.

©2017 The Manitowoc Company, Inc.
Form No MAXbase Leaflet
Part No 17-004/ 75/2-2017

www.manitowoc.com




MAXbase

Maximize your crane's potential.

NEW




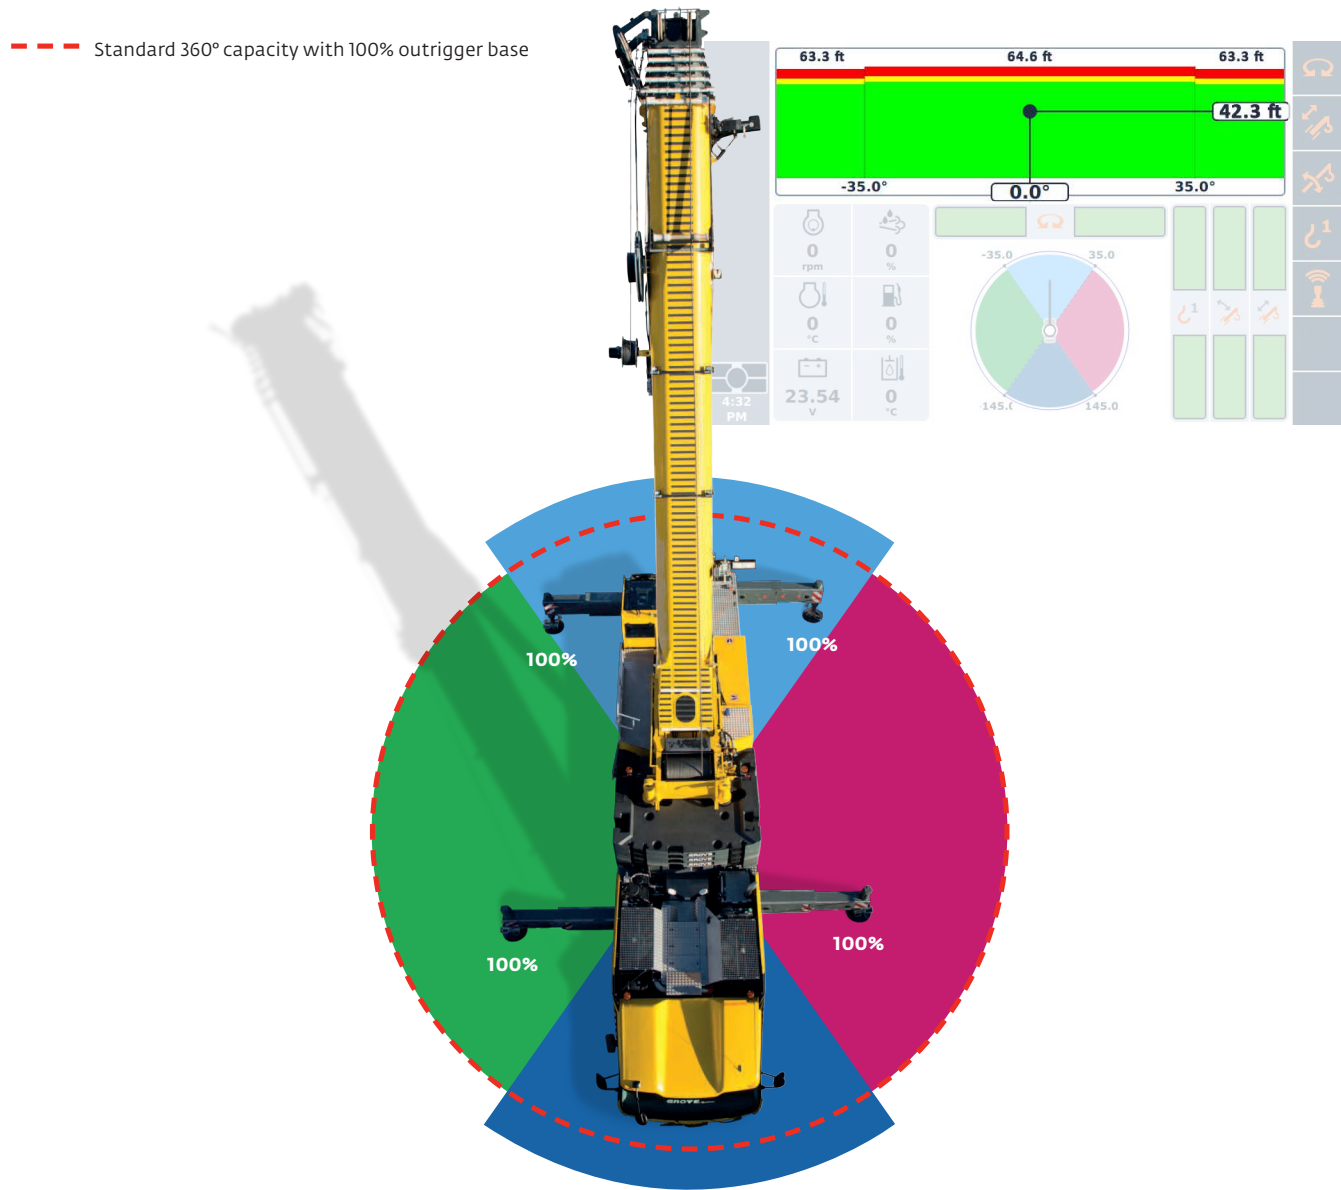

MAXbasecalculationsimproveevensymmetrical outrigger positioning. The four-sector calculation formula allows an increase to 360° charts by more specifically defining your stability limitations and taking advantage of them.


Radius [ft]	± 35° back Lifting capacity [klbs]	± 35° front Lifting capacity [klbs]	± 55° left Lifting capacity [klbs]	± 55° right Lifting capacity [klbs]
15	220,0	220,0	220,0	220,0
20	199,0	199,0	199,0	199,0
25	176,0	176,0	176,0	176,0
30	147,0	153,0	152,0	152,0
35	120,0	126,0	123,0	123,0
40	99,0	107,0	100,0	100,0
45	84,0	89,0	82,0	82,0
50	71,0	74,0	69,0	69,0
55	60,0	63,0	58,0	58,0
60	52,0	54,0	49,0	49,0
65	44,0	46,0	42,4	42,4
70	38,6	40,0	36,8	36,8
75	33,6	34,8	31,8	31,8

*All shown configurations with 10 klbs counterweight and 93.5 m boom.

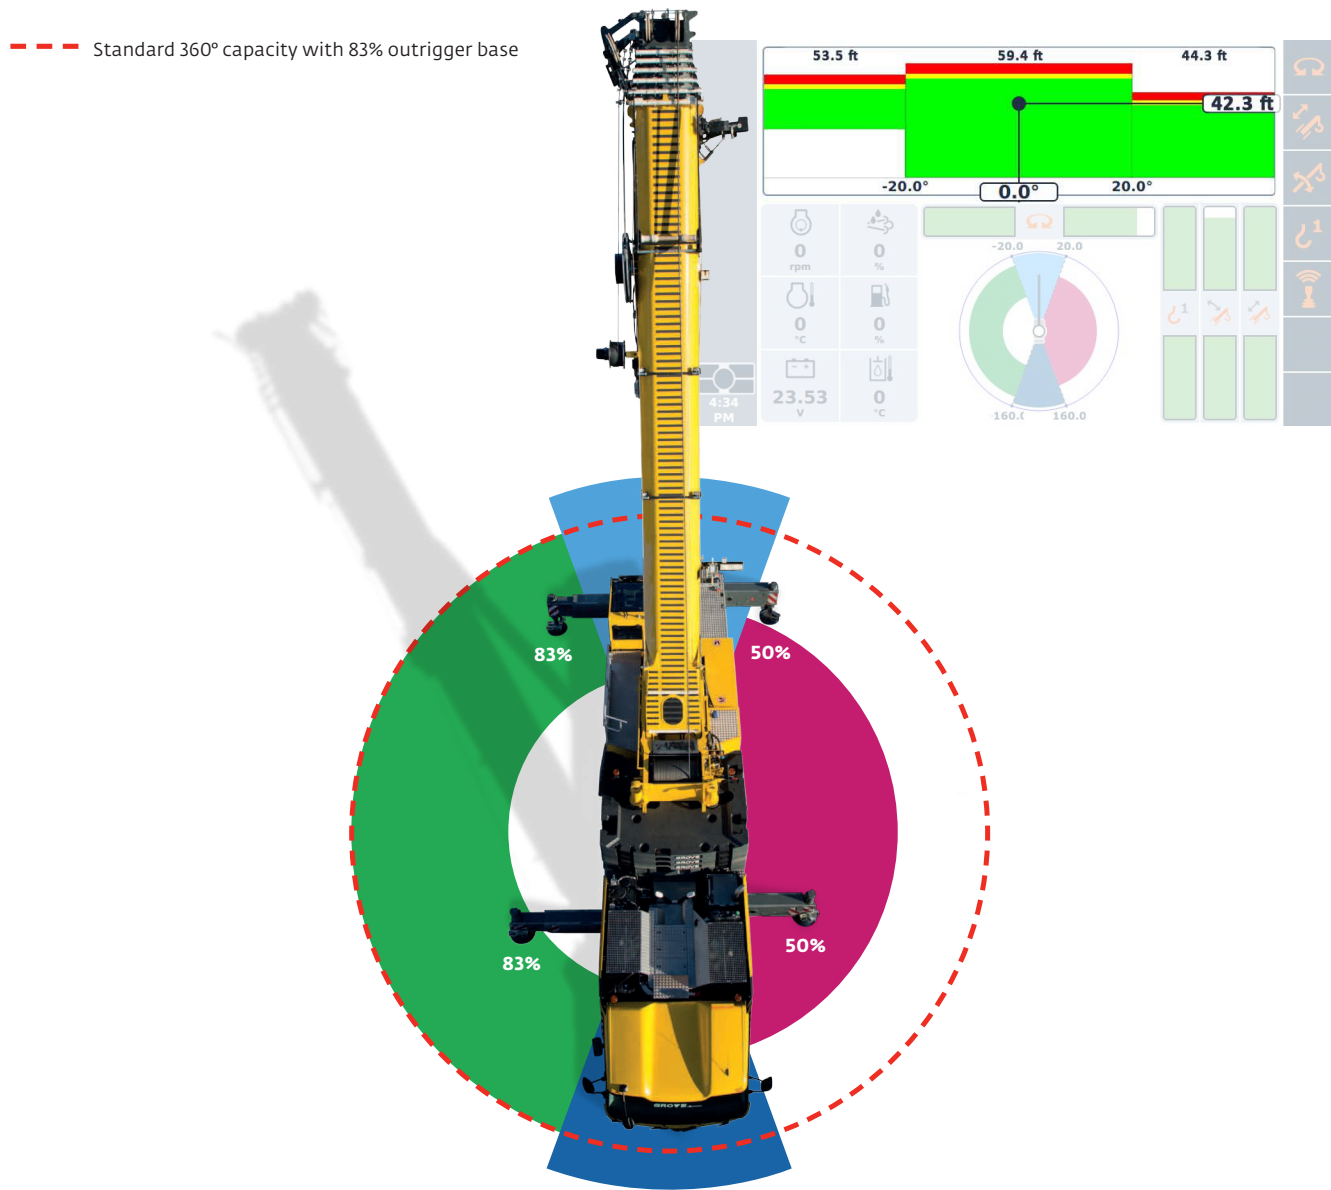

MAXbase, allows the outriggers to be controlled, symmetrically right and left or front and rear. This provides better access to tighter job sites and closer positioning to the lift. Reduce transport costs by leaving costly jibs and counterweight at the yard.

Radius [ft]	± 20° back Lifting capacity [klbs]	± 20° front Lifting capacity [klbs]	± 70° left Lifting capacity [klbs]	± 70° right Lifting capacity [klbs]
15	220,0	217,0		182,0
20	190,0	183,0		129,0
25	161,0	153,0		99,0
30	137,0	129,0		78,0
35	111,0	111,0	104,0	63,0
40	89,0	89,0	85,0	52,0
45	73,0	73,0	69,0	43,4
50	61,0	61,0	57,0	36,4
55	52,0	51,0	48,0	30,4
60	44,0	43,0	40,6	25,2
65	38,0	37,0	34,4	21,0
70	33,0	31,8	29,4	17,4
75	28,6	27,2	25,2	14,4

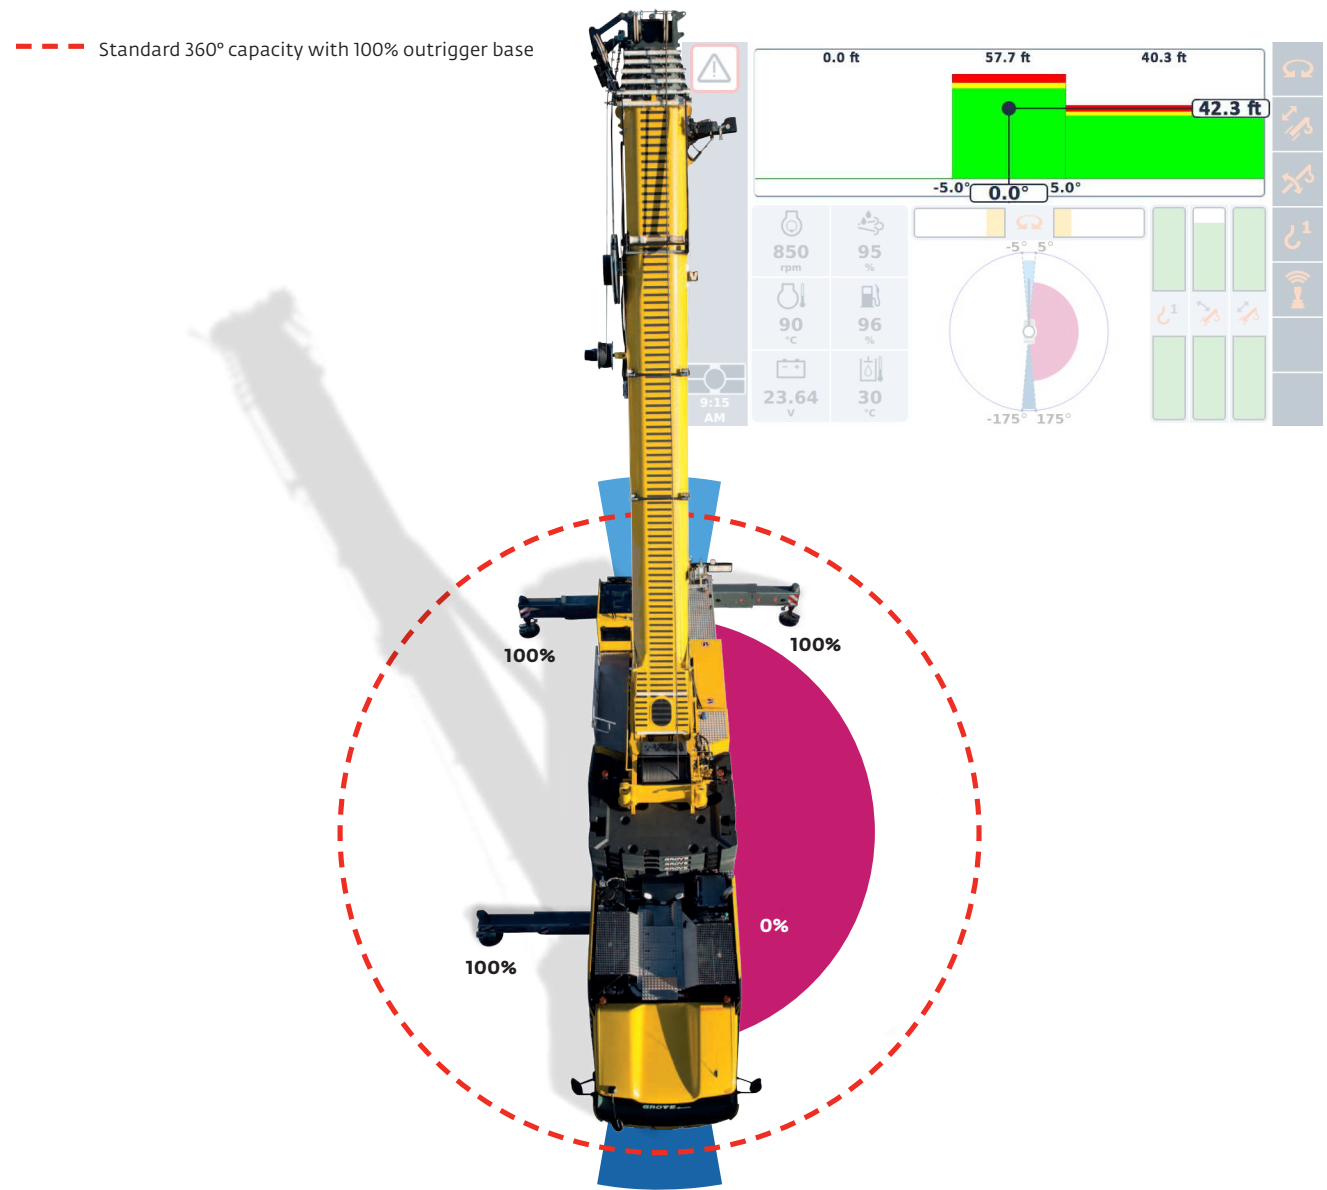

Obstacles on construction sites may prevent an outrigger from being extended. These are situations in which crane operators always had to accept reduced lifting capacities in the past because of a fully retracted outrigger base. MAXbase provides calculated charts for these instances where the crane can still use its full potential in some sectors. MAXbase also takes into account rear stability avoiding the crane to tilt backwards.

Radius [ft]	± 5° back Lifting capacity [klbs]	± 5° front Lifting capacity [klbs]	± 85° left Lifting capacity [klbs]	± 85° right Lifting capacity [klbs]
15	220,0	180,0		171,0
20	199,0	145,0		135,0
25	176,0	121,0		101,0
30	143,0	103,0		74,0
35	110,0	89,0		58,0
40	87,0	77,0		46,0
45	71,0	68,0		36,8
50	59,0	60,0		29,6
55	50,0	53,0		24,2
60	41,6	48,0		19,6
65	35,4	42,8		15,6
70	30,4	38,4		12,6
75	26,0	34,6		9,8