

THE

**PERFECT** 

CONNECTION




## **FEATURES**

- EASY ONE-MAN OPERATION
  - · LOW PROFILE LOAD ANGLE
    - TWIN CUSHION CYLINDERS
      - SEALED BEAM LIGHTING SYSTEM



## 20APC

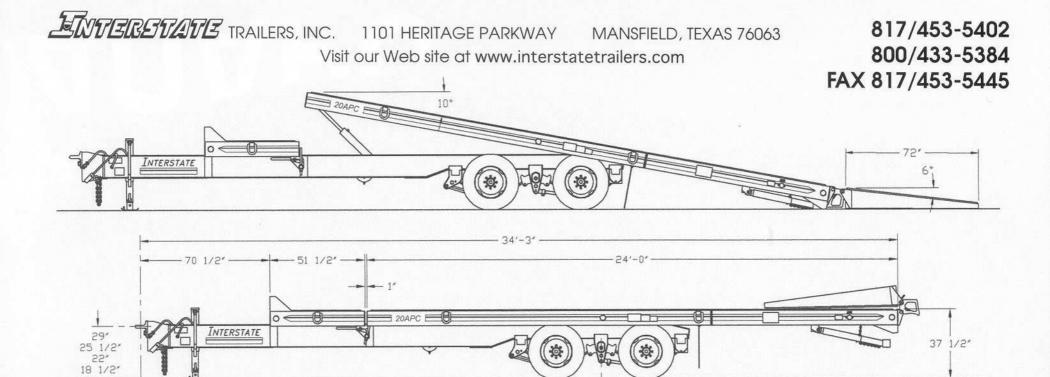

Model: 20APC

CAPACITY:	20,000# @ 65 MPH
Craricini.	20,00011 @ 00 1111 11

5,950# Overall Weight: Overall Length: 34' 41/2" 96"/102" Overall Width: Platform Length: 24' 0"

Stationary Deck: 51 1/2" Platform Height: 38"

Paver Ramps: 72" (spring assisted)

(2" nominal hardwood)

Decking: 2" Nominal Hardwood Hitch: Adjustable Pintle Eye

Cushion Cylinder: 2 (3 1/2" diameter) Main Rail:

Tilt Bed - W8" x 15# A572 Gr. 50 High Tensile

Chassis: W12" x 19# A572, Gr. 50 Hi-Tensile

Crossmembers: Tilt Bed - S6" x 12.5# A572 Gr. 50 High Tensile

4" x 4" Square Tube A500B Chassis:

Heavy Duty Axles: (2) "Dexter" 10,000# Heavy Duty Brakes: Air, 12-1/4" x 4" with ABS

Hutch 9700 Heavy Duty Suspension:

(8) 235/80R16, (E) Goodyears

Tires:

Heavy Duty Wheels:

Lights & Electric:

8 hole, Steel Disc

Sealed Beam System/ICC &

DOT Approved

Heavy Duty Jack:

12,000# Drop Leg

Interstate Trailers, Inc. reserves the right to change design, material and/or specifications without notice and without incurring any obligation to such changes.

Your **ENVEREVAVE** Dealer Is