

THE

PERFECT

CONNECTION

FEATURES

CONTINUOUS MAIN BEAM DESIGN

HEAVY DUTY SPRING SUSPENSION

· SEALED BEAM ELECTRICAL SYSTEM

BREAKAWAY SYSTEM

REAR RAMPS FOR ROLLER

· 16,000 Lb. Capacity


· SIDE RAMPS FOR PAVER

DISC WHEELS – 8 BOLT

16PBS

Fax: 817/453-5445

Visit our Web site at www.interstatetrailers.com

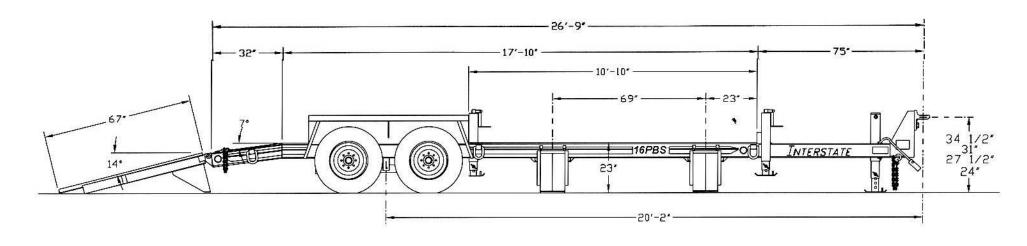

MODEL: 16PBS

CAPACITY:	16,000 lbs.	Ramp Width (Side):	137,"
Trailer Weight:	4,800#	Decking:	2" Nominal Hardwood
Overall Length:	26' 9"	Main Ralls:	W6" 16# A572 Gr. 50 Hi-Tensile
Overall Width:	102"	Crossmembers:	4" x 3.2# I Beam Gr. 50 Hi-Tensile
Platform Length:	20' 6"	Heavy Duty Axles:	(2) 8,000# - 4" Drop
Platform Width:	102"	Heavy Duty Brakes:	Electric - $12\frac{1}{4}$ x $3\frac{3}{8}$
Width Between Fenders:	80"	Heavy Duty Suspension:	Spring Type
Platform Height:	23"	Tires:	(4) 215/75R x 17.5 - 16PR Radial
Dovetail Length:	32"	Heavy Duty Wheels:	(4) 6.75 x 17.5 8 Bolt Disc
Ramp Length (Rear):	67"	Lights & Electric:	Sealed Beam System/ICC &
Ramp Width (Rear):	211/2"		DOT Approved
Ramp Length (Side):	771/2"	Hitch:	Adjustable Pintle Eye - 4 Position

Gel Cell Break-A-Way Switch System with Battery Heavy Duty Jack: 12,000 # Screw Type

Interstate Trailers, Inc. reserves the right to change design, material and/or specifications without notice and without incurring any obligation to such changes.

Your **ENTERETATE** Dealer Is