

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Sito Nuovo 14

29010 Sarmato (PC) - Italy

t +39 0523 8486


e info@jmgcranes.com



Data subject to change without prior notice
Edition 12/2019 © 2019 JMG Cranes S.p.A. All rights reserved
Rev. 1 - 04/20



Electric Pick & Carry Cranes

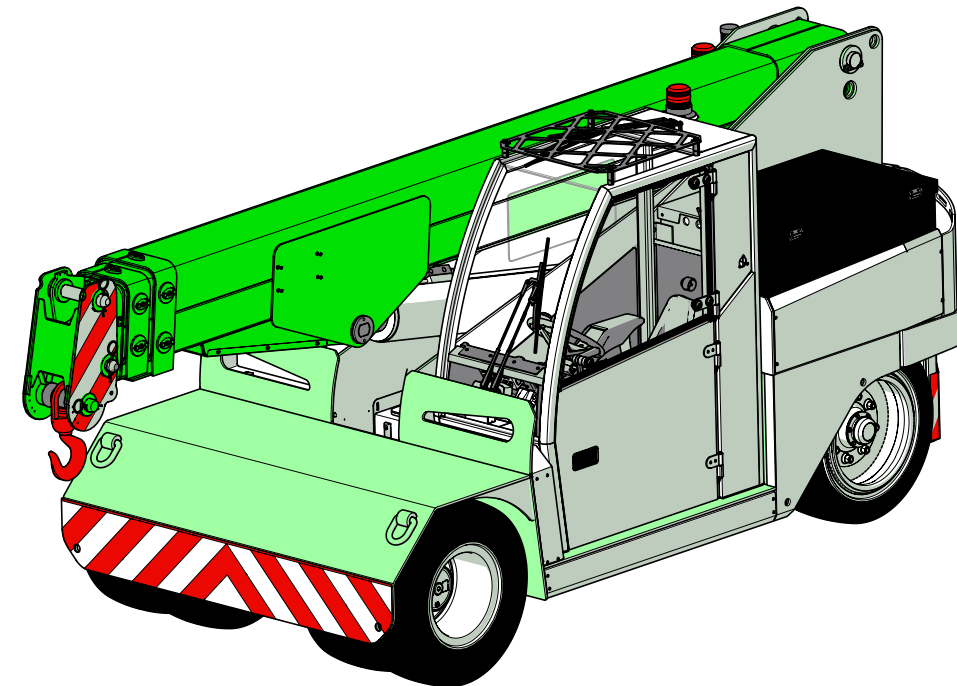

MC 120 (metric)
Max Capacity 12,000 kg

www.jmgcranes.com

JMG[®]
move to solution

HYDRAULICALLY TELESCOPING PROPORTIONALLY TYPE BOOM
FRONT-WHEELS DRIVE WITH COUNTER ROTATION
REMOVABLE COUNTERWEIGHTS
180° REAR STEERING



Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB WITH HYDRAULIC EXTENSION
- BENDABLE MANUAL JIB WITH MANUAL EXTENSION
- NON-MARKING TIRES
- RADIO REMOTE CONTROL
- HYDRAULIC FORKS
- MAN BUCKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING





Technical features

Max Capacity kg	 12,000	 Front-wheels drive. 2 electric motors AC 7,5 kW 80V Insulation class H	LMI	Electronic safe load indicator and tilting moment limiter
		 Total Kg. 13,450 Removable counterweights Kg. 3,000		 Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels
Dimension mm	 4020x1950x2000	 80 V - 840 Ah 8 working hours		 Fabricated from preformed and welded quality steel plate
		 Front nr. 4 superelastic 300-15" Rear nr. 2 superelastic 250-15"		 +60°/-8°
		 Rear Steering angle -90°/+90°		 Motor driven pump 1x16 kW-80 V AC



Load charts

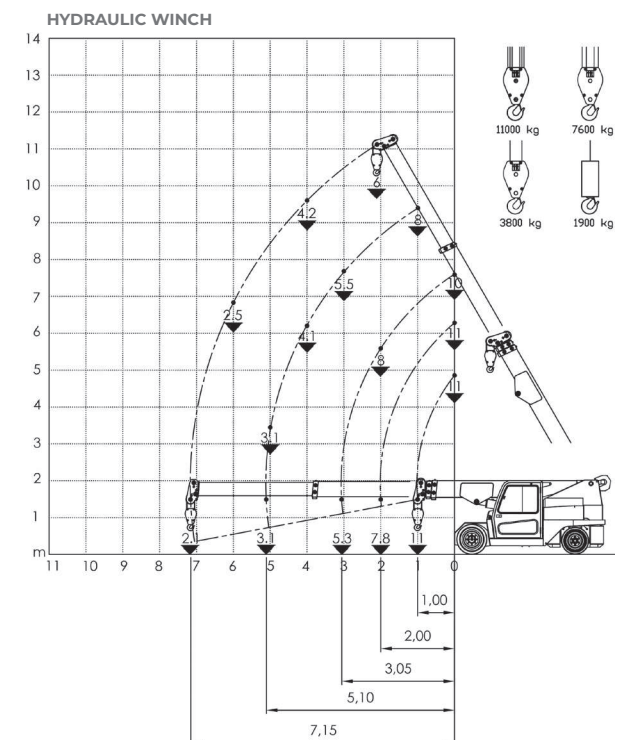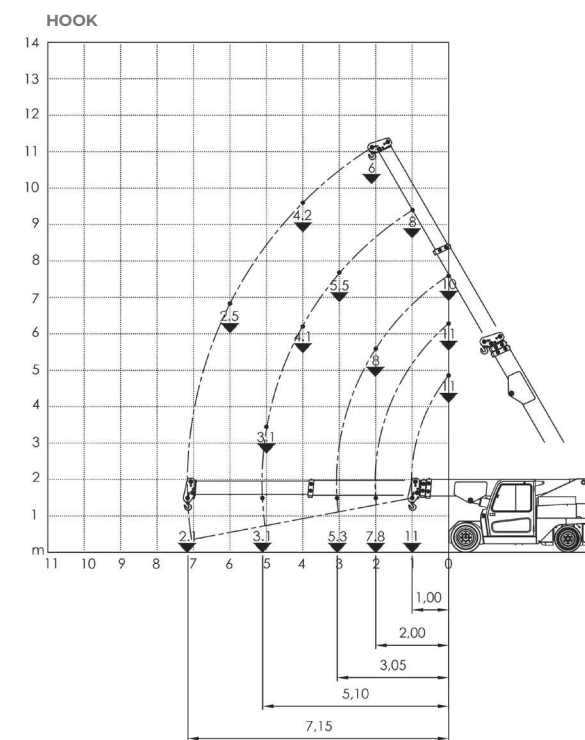

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

