

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Sito Nuovo 14

29010 Sarmato (PC) - Italy

t +39 0523 8486


e info@jmgcranes.com



Data subject to change without prior notice
Edition 03/2020 © 2020 JMG Cranes S.p.A. All rights reserved
Rev.1 - 03/20



Electric Pick & Carry Cranes

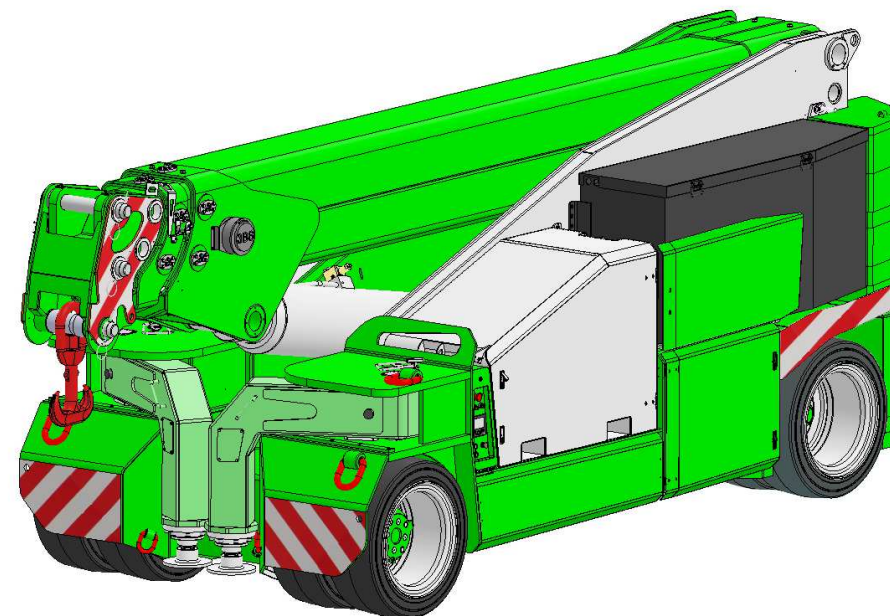

MC 350S (inch)
Max Capacity 77,000 lbs

www.jmgcranes.com

JMG[®]
move to solution

MC 350S

FRONT-WHEELS DRIVE WITH COUNTER ROTATION
HYDRAULICALLY TELESCOPING PROPORTIONAL TYPE BOOM

REMOVABLE COUNTERWEIGHTS
180° REAR STEERING

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB
- BENDABLE MANUAL JIB WITH MANUAL EXTENSION
- NON-MARKING TIRES
- FRONT OUTRIGGERS
- HYDRAULIC FORKS
- MAN BUCKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING



Load charts



Technical features

Max Capacity lbs


 77,000

Dimensions Inch


 16'11"x7'4"x7'6"

	Front-wheels drive. 2 electric motors AC 12 kW 96V Insulation class H	LMI	Electronic safe load indicator and tilting moment limiter
	Total lbs 67,100 Removable counterweights lbs 19,100		Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels
	96 V - 1395 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 4 superelastic 355/50-20" Rear nr. 4 superelastic 355/50-20"		+60°/-7°
	Rear Steering angle -90°/+90°		Motor driven pump 1x35 kW - 96 V AC, 1x23 kW - 96 AC.

HOOK & HYDRAULIC WINCH

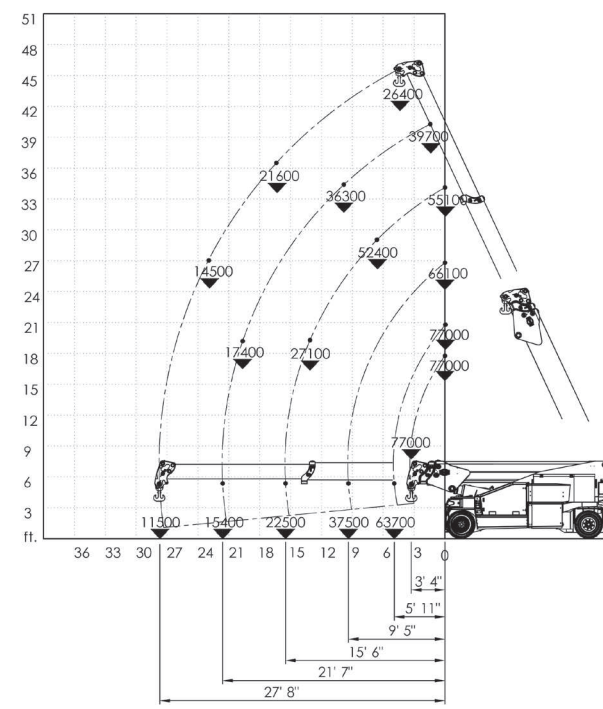

HOOK & HYDRAULIC WINCH FRONT OUTRIGGERS

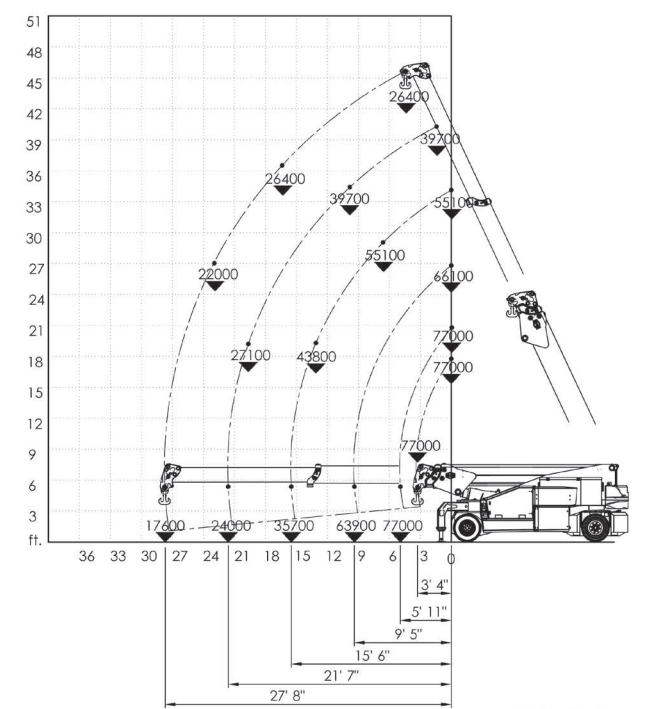

EU Standards CE

	UNI ISO 4030-1: A1
	2006/42/CE- 2000/14/CE -2014/30 UE 2014/35/UE - D.Lgs 262/2002 subsequent modifications
	EN 13000:2014 subsequent modifications



Dimensions

