


K800 TC2



27 m


— 93.1 m

79 m



PHASE 6. HUH = 79 m (elevation: 93.1m. required:92.6m)

Wind speed	IN SERVICE 20 m/s	OUT OF SERVICE 50 m/s
M (kNm)	11140	12770
N (kN)	2700	2470
Q (kN)	95	320
M _T (kNm)	1000	0
Corner compression (kN)	2870	3120
Corner tension (kN)	1510	1890

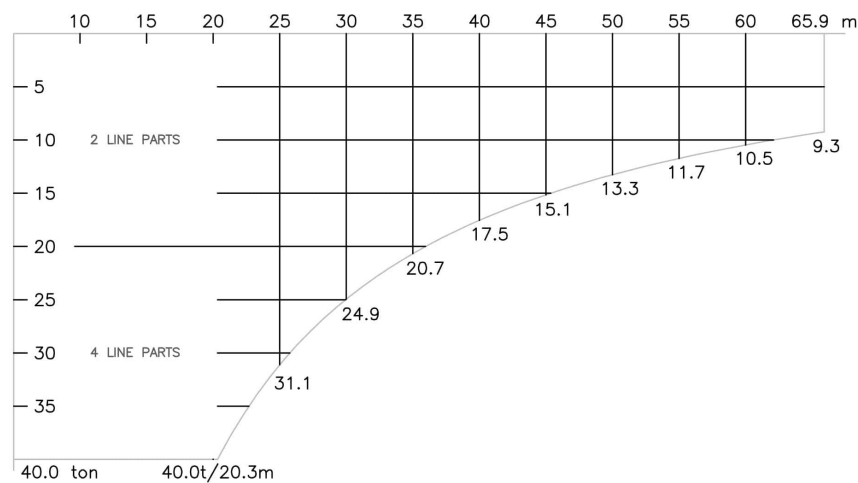

3.92 m

-14.1 m

PERFORMANCE

 HOIST MOTOR :		85 KW
2 PARTS	0-4 t  4-8 t 8-10 t	0-74 m/min 0-44 m/min 0-22 m/min
4 PARTS	0-8 t  8-16 t 16-40 t	0-37 m/min 0-22 m/min 0-11 m/min
	0-40 t	0-70 m/min
	0-40 t	0-0.6 rpm
	0-40 t	N/A
 3 x 380-440 V 50-60 Hz		CONTROL VOLTAGE 24 VDC ~ 220 VAC

KONST.: 111209 J.	PROJ.	KRANTYPE	STK.	SAML.	TEGN.				
TEGN.: 111209 J.									
QOQK.: 111209 J.									
ERSTATTER:	SKALA:	OVERF. AREAL	OVERFLADE-BEHANDLING:	MATR.:					
ERSTATET AF:	1:200	m ²		SMÅ:					
	TOTALVEGT:	kg	ANT. TEGNING::	ANT. STYKL::					
OPRINDELSE:	TRANSPORTMÅL:	m ³	TITEL						
	KRØLL CRANES A/S		K800						
NORDKRAVVEJ 2 3540 LYNØE DENMARK		Main assembly							
Telefon: +45 66 82400 Fax: +45 66 18067 www.krøll.dk		TEGN. NR.							
		C14 - 01		00090801-00					