


The synergy of wide experience, research and development for your success and benefit.

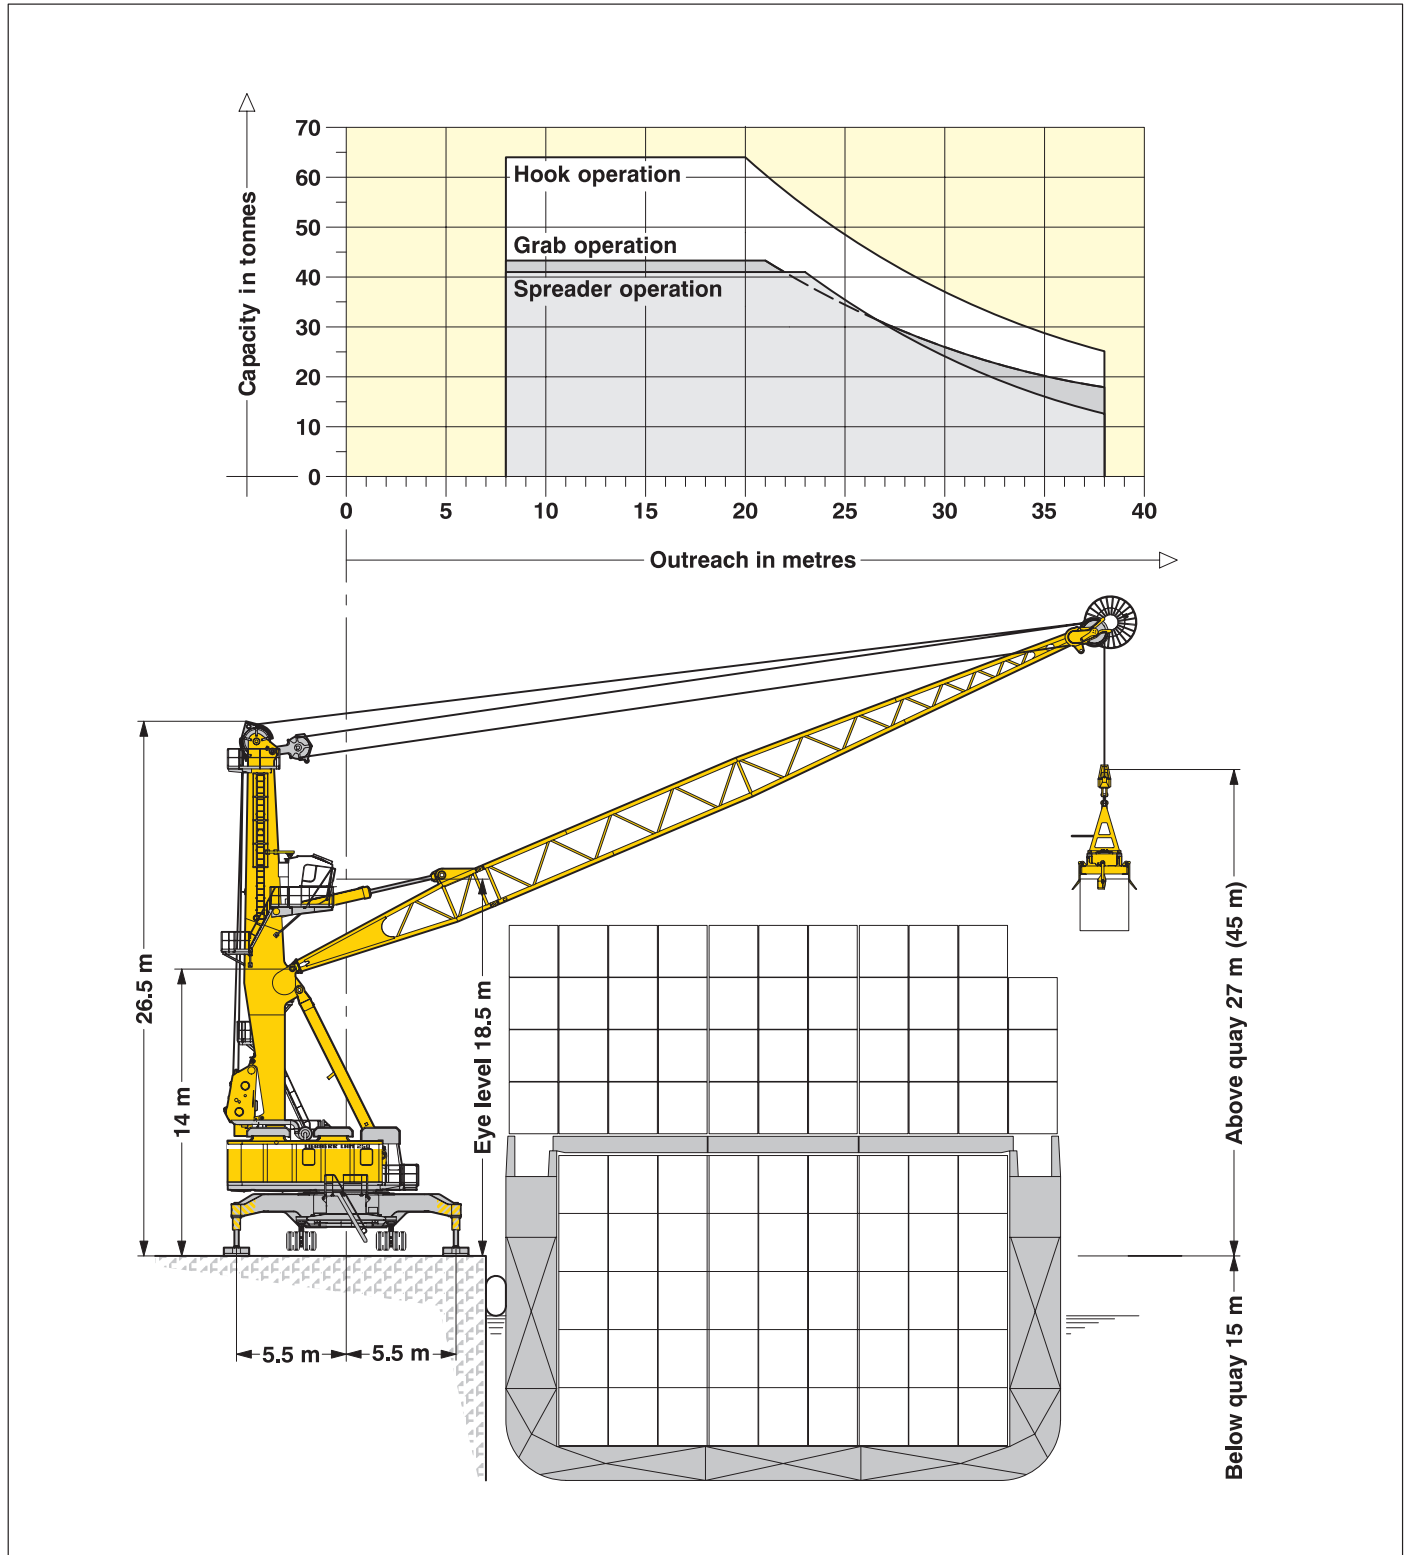


Liebherr harbour mobile crane

Type LHM 250 Litronic®

- utmost performance
- high reliability and quality
- low operational costs
- unsurpassed mobility and versatility
- worldwide service network

Radius	Hook operation	Spreader operation	Grab operation
(m)	(t)	(t)	(t)
8	64.0	41.0	43.3
20	64.0	41.0	43.3
21	62.2	41.0	43.3
22	58.6	41.0	41.7
23	55.0	41.0	39.1
24	51.4	39.7	36.5
25	48.5	36.8	34.5
26	45.6	33.9	32.4
27	43.2	31.5	30.7
28	40.7	29.0	29.0
29	38.7	27.0	27.5
30	36.6	24.9	26.0
31	34.9	23.2	24.8
32	33.1	21.4	23.5
33	31.6	19.9	22.5
34	30.1	18.4	21.4
35	28.8	17.1	20.5
36	27.4	15.7	19.5
37	26.3	14.6	18.7
38	25.1	13.4	17.9

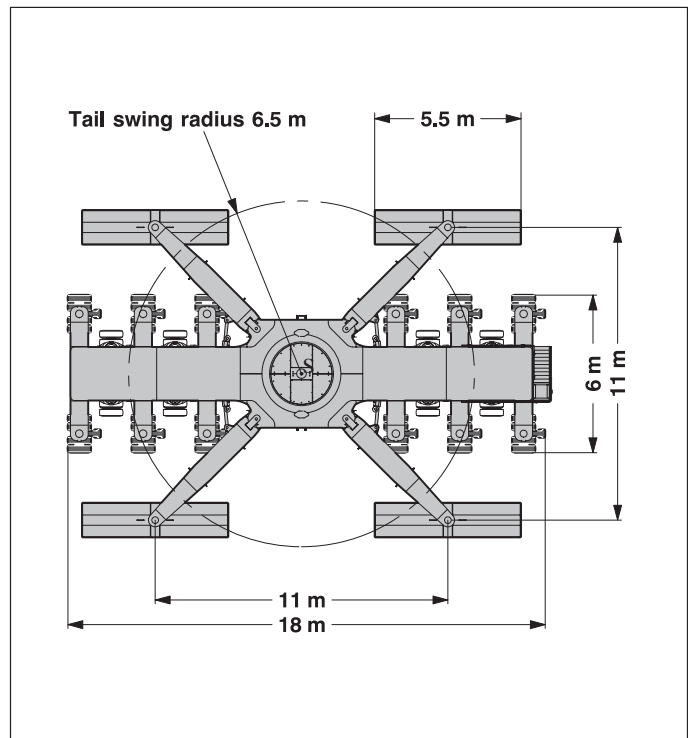

Capacities

Standard operation ————— 64 t

Main dimensions

Min to max. outreach ————— 8 – 38 m
 Height of boom fulcrum ————— 14.0 m
 Tower cabin height (eye level) ————— 18.5 m

Hoisting heights

Above quay at minimum radius ————— 45 m
 Above quay at maximum radius ————— 27 m
 Below quay ————— 15 m

Working speeds

Hoisting / lowering ————— 0 – 90 m/min
 Slewing ————— 0 – 1.4 rpm
 Luffing ————— 0 – 45 m/min
 Travelling ————— 0 – 90 m/min

Quay load arrangements

Uniformly Distributed Load ————— 1.4 t/m²
 Max. load per tyre ————— 5.3 t

Due to its unique travelling and supporting system, the parameters of the undercarriage (pad sizes, supporting base and number of axle sets) can easily be adapted to comply with the most stringent quay load restrictions.

Weights

Weight of the crane ————— 210 t
 Counterweight ————— 25 t
 Total weight of the crane ————— approx. 235 t

Propping arrangements

Standard supporting base ————— 11 m x 11 m
 Standard pad dimension ————— 4x 5.5 m x 1.3 m

Liebherr-Werk Nenzing GmbH
 P.O. Box 10, A-6710 Nenzing/Austria
 Tel.: +43 5525 606-725
 Fax: +43 5525 606-447
 harbour.mobile.crane@lwn.liebherr.com
 www.liebherr.com

LIEBHERR

Courtesy of Crane.Market