


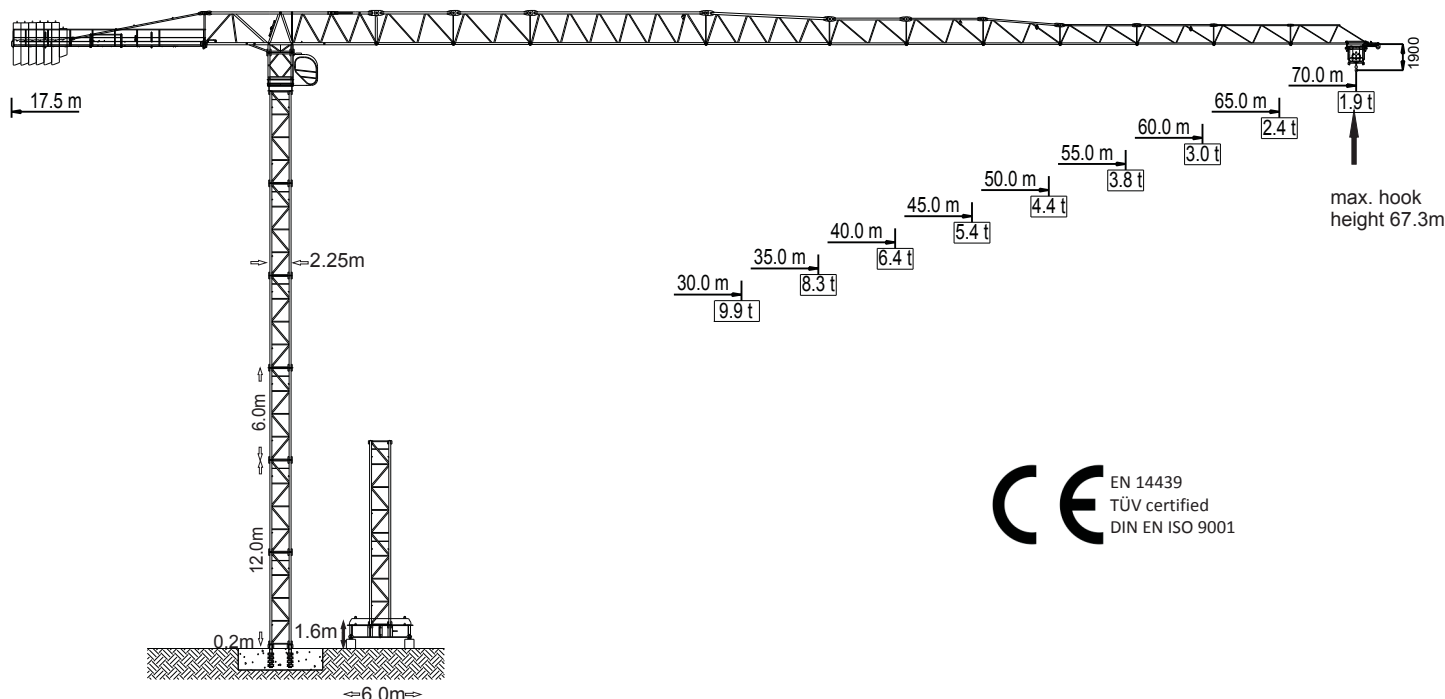

jib length & capacity												
jib		max. capacity		jib length								
m	rope	t	m	30	35	40	45	50	55	60	65	70
70		6.0	30.5	6.00	5.05	4.26	3.65	3.16	2.76	2.43	2.14	1.90
		12.0	16.6	6.10	5.05	4.26	3.65	3.16	2.76	2.43	2.14	1.90
65		6.0	33.3	6.00	5.53	4.68	4.02	3.50	3.06	2.70	2.40	
		12.0	17.9	6.66	5.53	4.68	4.02	3.50	3.06	2.70	2.40	
60		6.0	35.2	6.00	6.00	5.13	4.42	3.85	3.39	3.00		
		12.0	19.3	7.25	6.04	5.13	4.42	3.85	3.39	3.00		
55		6.0	39.0	6.00	6.00	5.69	4.92	4.31	3.80			
		12.0	21.0	8.01	6.69	5.69	4.92	4.31	3.80			
50		6.0	39.8	6.00	6.00	5.81	5.03	4.40				
		12.0	21.3	8.17	6.82	5.81	5.03	4.40				
45		6.0	41.5	6.00	6.00	6.00	5.40					
		12.0	22.6	8.73	7.30	6.23	5.40					
40		6.0	40.0	6.00	6.00	6.00						
		12.0	23.1	8.95	7.49	6.40						
35		6.0	35.0	6.00	6.00							
		12.0	25.2	9.89	8.30							
30		6.0	30.0	6.00								
		12.0	25.3	9.90								

Motor	5.5kW FI	2 x 4.5kW	2 x 7.5kW
t/v	0,0 - 80.0m/min	0.80 min-1	25.0 m/min
electr. power supply crane top	hoist winch 45kW	72 kVA	

		fixing angles	u. carriage 6,0m
jib length (m)		30.0-70.0	30.0-70.0
tower height	TM 19	60.2m	61.6
	TM 19v	66.2m	-

Hoisting speeds 400-440V; 50-60Hz							
hoist winch 45kW with frequency inverter							
	load (to)	2.7	3.0	3.4	4.2	5.2	6.0
	v (m/min)	72	68	62	52	42	38
	load (to)	5.4	6.0	6.8	8.4	10.4	12.0
	v (m/min)	36	34	31	26	21	19
hoist drum capacity		480.0m					

version 04/12, subject to alteration

available with:

MTI-LUX S.A.
2a, rue Prince Henri
6735 Grevenmacher
Luxemburg

00352 26 74 54 80
Fax 00352 26 74 54 83
e-Mail info@mti-lux.com
www.mti-lux.com

