

MINI 12



www.ommelift.dk

A SMALL LIFT WITH BIG FEATURES TRAILER MOUNTED


OMME LIFT A/S – Lægårdsvej 4 – DK 7260 Sdr. Omme
Phone: + 45 753 413 00 – Fax: + 45 753 415 92
E-mail: omme@ommelift.dk – Web: www.ommelift.dk

OMMELIFT

Quality since 1906

Mini 12 E

Mounted on trailer

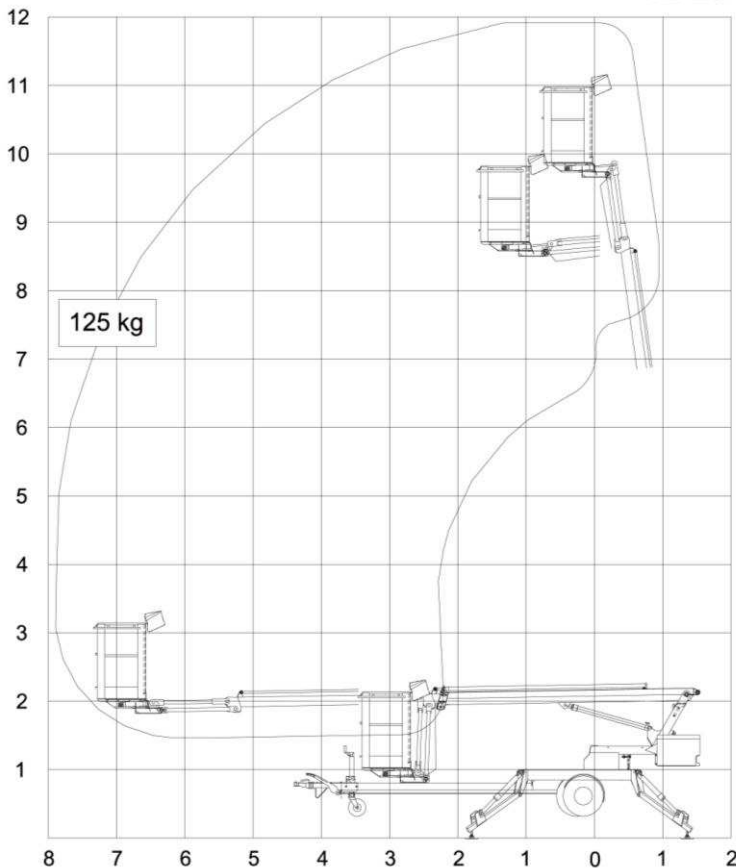

Technical data:	Mini 12 EJ	Mini 12 EBJ
Max. working height	11.90 m	
Max. outreach	7.85 m	
Max. basket load	125 kg	
Basket size	0.85x0.7x1.1m	
Rotation	± 355°	
Power supply	230V/10A	24V/139Ah/5h
Transport length	6.03 m	
Transport height	1.95 m	
Transport width	1.50/0.99 m	
Operational width	3.60 m	
Total weight aprox.	1200 kg	1200 kg
230 V outlet in basket	+	
2 – step controls	+	
Adjustable traveling width	+	
Propulsion	O	

+ standard O option


A small lift with big features



Easy transport



Narrow



Propulsion



Fly jib

- Type 12 EJ is powered by 230V mains and is especially suitable where continuous operation is required. Type 12 EBJ is powered by a heavy duty 24V/139 Ah battery pack with built-in charger capable of charging the batteries whilst the platform is in use. Operation is also possible independently of mains connection.
- **Adjustable travelling width:**
With the axles retracted, the overall width is down to 0.99 m which enables the lift to pass through narrow openings.
Standard features also include hydraulic stabilizers, tool tray and power outlet in the basket.
- **Fly jib:**
The fly jib provides access up and over roof edges or other difficult to reach areas. The jib also lifts the basket up behind obstacles. Generally, the fly jib means more convenient and precise manoeuvrability. The telescopic boom ensures quick up and down movements and enables full unrestricted outreach to be achieved even at low level. Furthermore, the tail swing falls within the area of the outrigger footprint so the operator does not need to worry about slewing the knuckle into fixed structures around the set up area.