


PK 33002-EH

High Performance

PALFINGER CRANE



KTL
protected

**Paltronic
50**
controlled

RRC
Radio Remote Control
operated

ISC
Integrated Stability Control
monitored

AOS
Active Oscillation Suppression
inside

DPS
Dual Power System
activated


Perfection in design and manoeuvrability

The PK 33002 EH with its well-proven E-HPLS technology combines power, comfort, and safety in exemplary fashion. Its design is functional. Its exceptional movement geometry expands its horizon of duties. With the maintenance-free boom system, the crane couldn't be better prepared for a long and carefree life. – What operator wouldn't be happy?


Uncompromising High Performance equipment

PK 33002 EH High Performance

E

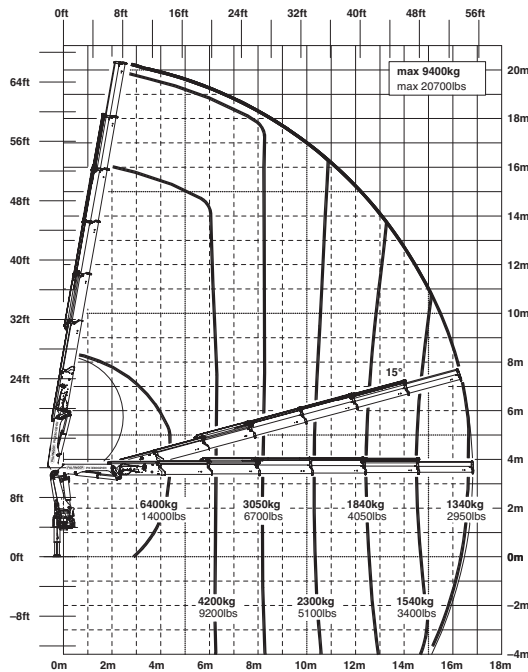

G

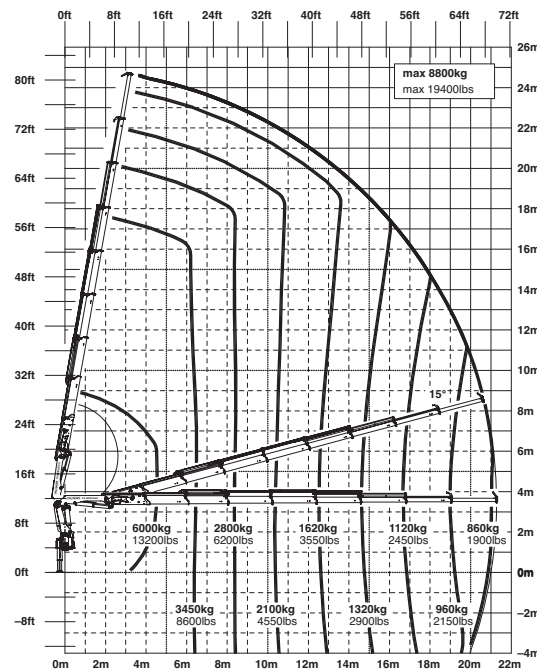

Technical Specifications (EN 12999 H1-B3)

Max. lifting moment	31.1 mt/305.0 kNm	224940 ft.lbs
Max. lifting capacity	10000 kg/98.1 kN	22050 lbs
Max. hydraulic outreach	21.3 m	69' 11"
Max. manual outreach	23.3 m	76' 5"
Max. outreach (with fly jib)	29.4 m	96' 5"
Slewing angle	400 °	

Slewing torque	3.2 mt/31.4 kNm	23130 ft.lbs
Stabilizer spread	std. 5.6 m/18' 4"	max. 7.4 m/24' 3"
Fitting space required (std.)	1.01 m	3' 4"
Width folded	2.53 m	8' 3"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 80 l/min to 100 l/min	21.1 US gal./min 26.4 US gal./min
Dead weight (std.)	2876 kg	6340 lbs

