

25 LR 30 Lp+R



228 –
284 kNm



8,2 –
10,1 m



3,5 –
5 m



3,5 –
5 m



2.620 –
2.810 kg



415°



38 kNm




235 –
285 bar



90 l/min
~ 70 kW




180 l/min
~ 78 kW

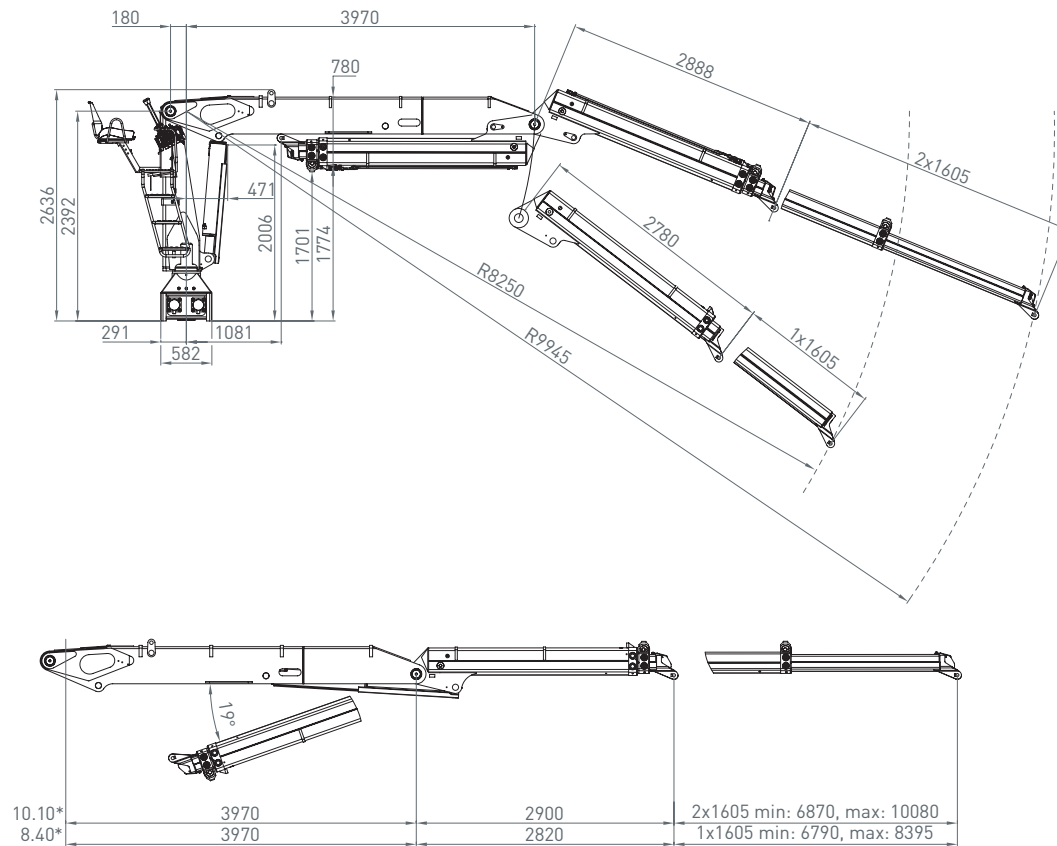


	4m	5m	6m	7m	8m	9m	10m
25L10.00R	5835	4670	3900	3335	2885	2565	2305
30Lp+10.00R	7080	5665	4725	4045	3495	3110	2795
25L8.20R	5980	4785	3985	3410	2945	-	-
30Lp+8.20R	7255	5800	4830	4140	3575	-	-

	4m	5m	6m	7m	8m	9m	10m
25L10.10R*	5835	4670	3900	3335	2885	2565	2305
30Lp+10.10R*	7080	5665	4725	4045	3495	3110	2795
25L8.40R*	5980	4785	3985	3410	2945	-	-
30Lp+8.40R*	7255	5800	4830	4140	3575	-	-


* gestreckt/stretched

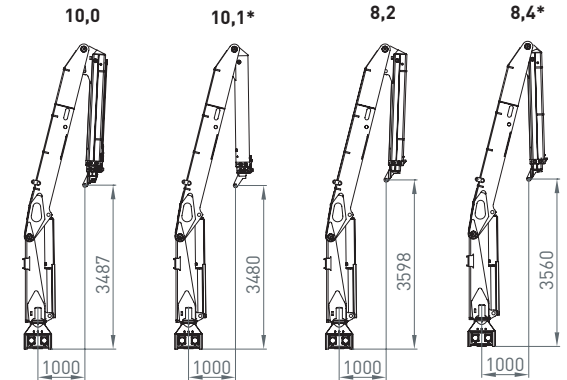

Schwenkabstützung
swinging outridge

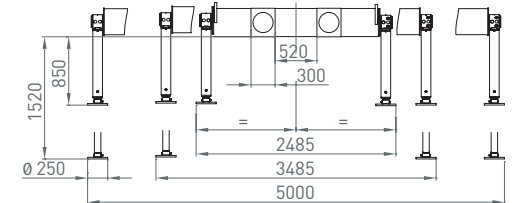

Vierkantabstützung
squared outridge

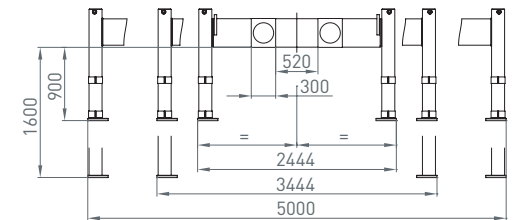

Rücksitz 01
Back seat 01

