

PETTIBONE®


» TRAVERSE T944

SPECIFICATIONS



The Pettibone® Traverse™ T944 telehandler provides peak performance in all conditions. Excellent operator visibility, 4-wheel drive maneuverability and exceptional reach and lift capabilities allow the T944 to work safely and efficiently on a wide variety of jobsites. Horizontal boom transfer of 70 inches further enhances load handling, while rapid response hydraulics and joystick control allow users to move loads confidently and consistently.


SPECIFICATIONS

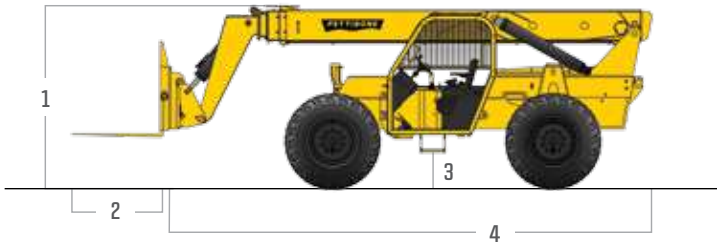


DIMENSIONS		
1	Height	7' 11" (243 cm) boom down
2	Fork Carriage	48" (122 cm) standard
3	Ground Clearance	18" (46 cm)
4	Length	22' (671 cm) to fork frame
	Overall Width	8' 6" (259 cm)
	Pallet Forks	2.25 x 4 x 48" standard
	Total Operating Weight	27,730 lbs (12,578 kg)
ENGINE		
	Model/Power	110 HP (82 kW) Cummins® Tier III turbo diesel with electronic control & protection
	Fuel Tank	32.6 gal. (123.4 L)
HYDRAULIC SYSTEM		
	Features	Piston pump, auxiliary boom tip hydraulics, quick disconnect for attachments
PERFORMANCE		
	Max Load Capacity	9,000 lbs (4,082 kg)
	Maximum Lift Height	44' 6" (1,356 cm)
	Maximum Forward Reach	36' 1" (1,100 cm) at 24" LC 30' 3" (922 cm) at 24" LC (non-traversed)
	Below Grade Reach	3' 1" (94 cm)
	Maximum Travel Speed	20 mph (32 km/h)
	Turning Radius	12' 6" (381 cm)
	Transfer	5' 10" (178 cm) horizontal boom travel
	Frame	24° of leveling (12° right and left); rear axle stabilization system; fits under 8' doorway
	Transmission	Fully modulated Carraro® Powershift, 4-speed forward & reverse; parking brake engaged transmission declutch
	Axles	Carraro outboard planetary; 4-wheel drive
	Steering	4 wheel, 2 wheel, and crab steer
	Brakes	Oil-immersed inboard disc service brakes, integral park brake
	Tires	13.00 x 24, 14 ply
	Boom	Automatic fork leveling without slave cylinders; 2 wide stance, heavy-duty lift cylinders

LIFT PERFORMANCE

Standard Fork Frame

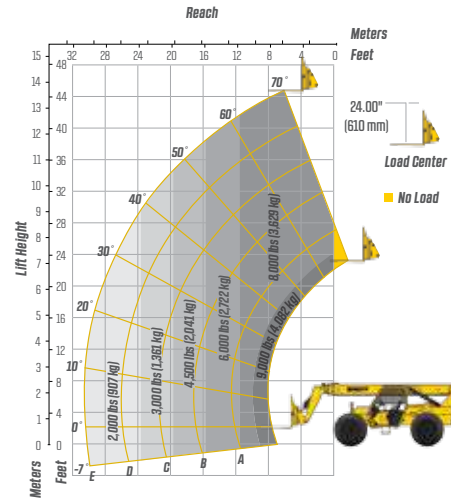

Standard Fork Frame

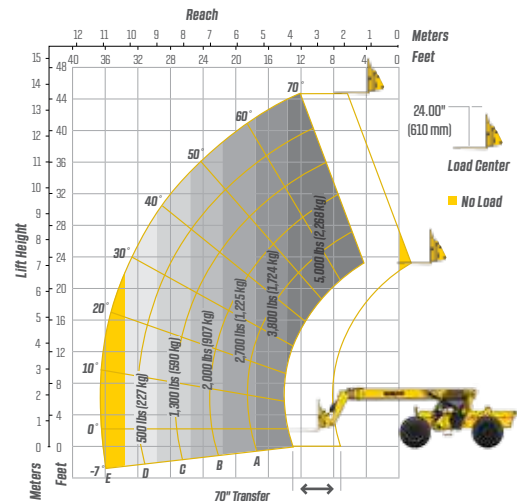

FEATURES & OPTIONS

OPERATOR CAB		
Adjustable suspension seat with seat belt	Machine level indicator	
Fully adjustable right-side armrest	Single multifunction hydraulic joystick	
Cab step	ROPS/FOPS	
AVAILABLE ATTACHMENTS		
Pallet, lumber and block forks	Truss boom	
Side tilt carriages +/- 10°	Utility buckets	
OPTIONS		
GPS equipment management system	Foam-filled tires	
Light packages	Enclosed cab	

* Specifications are subject to change.



PETTIBONE, LLC
 1100 Superior Avenue
 Baraga, MI 49908
 P: 800.467.3884
 info@gopettibone.com
 www.gopettibone.com



1 Year	Full machine and attachment
2 Years	Powertrain and major hydraulic components
3 Years	Machine structure

WARRANTY