

PETTIBONE®


» 1530 EXTENDO

SPECIFICATIONS



Featuring heavy-duty lift cylinders, automatic fork leveling and rear axle stabilization, the Pettibone® Extendo™ 1530 is built for productive load handling on difficult jobsites. Excellent cab visibility and a rapid-response hydraulic system contribute to maximum efficiency and enhanced safety. Additionally, four-wheel drive and three steering options help provide unmatched maneuverability on the job.

SPECIFICATIONS

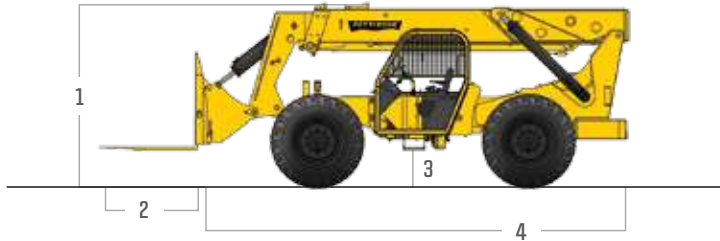

DIMENSIONS

1	Height	9' 5" (287 cm) boom down
2	Fork Carriage	72" (183 cm) standard
3	Ground Clearance	21" (53 cm)
4	Length	22' 7" (688 cm) to fork frame
	Overall Width	8' 6" (259 cm)
	Pallet Forks	2.25 x 6 x 48"
	Total Operating Weight	31,520 lbs (14,298 kg)

ENGINE

Model/Power	130 HP (97 kW) Cummins® Tier III turbo diesel with electronic control & protection
Fuel Tank	32.5 gal. (123 L)

HYDRAULIC SYSTEM

Features	Piston pump, auxiliary boom tip hydraulics, quick disconnect for attachments
Controls	Single joystick for all boom functions

FEATURES & OPTIONS

OPERATOR CAB

Adjustable suspension seat with seat belt Fully adjustable right-side armrest Cab step	Machine level indicator Single multifunction hydraulic joystick ROPS/FOPS
--	---


AVAILABLE ATTACHMENTS

2.25 x 6 x 60" Forks	2.00 x 8 x 48" Forks
2.25 x 6 x 72" Forks	Pipe & pole baler
2.25 x 6 x 96" Forks	

OPTIONS

Light packages	Enclosed cab
----------------	--------------

LIFT PERFORMANCE

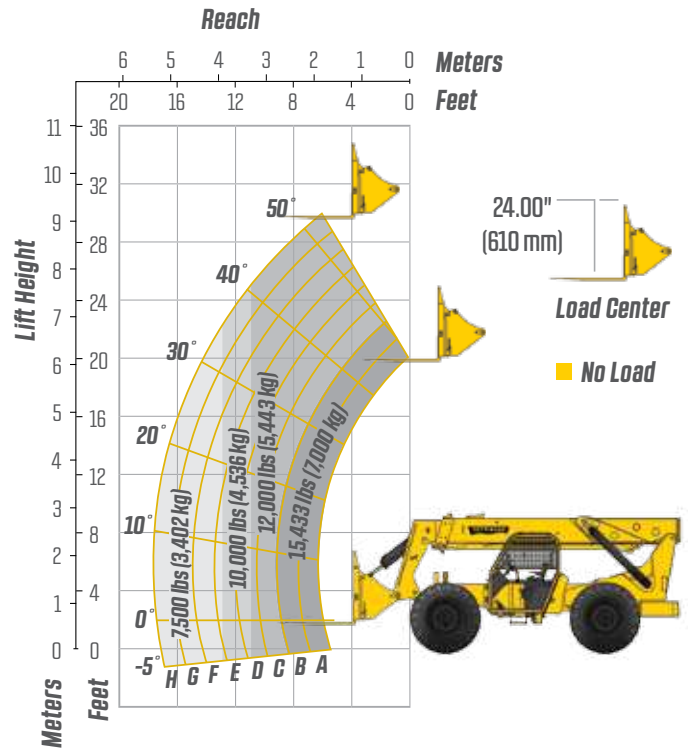

PERFORMANCE

Max Load Capacity	15,433 lbs (7,000 kg)
Maximum Lift Height	30' (914 cm)
Maximum Forward Reach	17' 5" (531 cm)
Below Grade Reach	15" (38 cm) with boom extended
Maximum Travel Speed	20 mph (32 km/h)
Turning Radius	16' (488 cm)
Frame	20° of leveling (10° right and left); rear axle stabilization system
Transmission	Modulated Dana® Powershift, 4-speed forward & 3-speed reverse with declutch
Axles	Dana outboard planetary; 4-wheel drive
Steering	4 wheel, 2 wheel, and crab steer
Brakes	Oil-immersed inboard disc service brakes, integral park brake
Tires	16.00 x 24, 16 ply
Boom	Automatic fork leveling without slave cylinders; 2 wide stance, heavy-duty lift cylinders

* Specifications are subject to change.

PETTIBONE®

PETTIBONE, LLC

1100 Superior Avenue
Baraga, MI 49908

P: 800.467.3884
info@gopettibone.com
www.gopettibone.com

**1-2-3
WARRANTY**

1 Year	Full machine and attachment
2 Years	Powertrain and major hydraulic components
3 Years	Machine structure

WARRANTY