
POTAIN®

Hup M 28-22 A

The crane for all your projects

Height Under Hook: 19,6 m - 31,1 m (raised jib at 30°)
Jib radius: 28 m
Maximum load: 2,2 t
Max. load at jib end: 700 kg or 850 kg*
Transport axle: 80 km/h on road **(depends on the local regulations)**

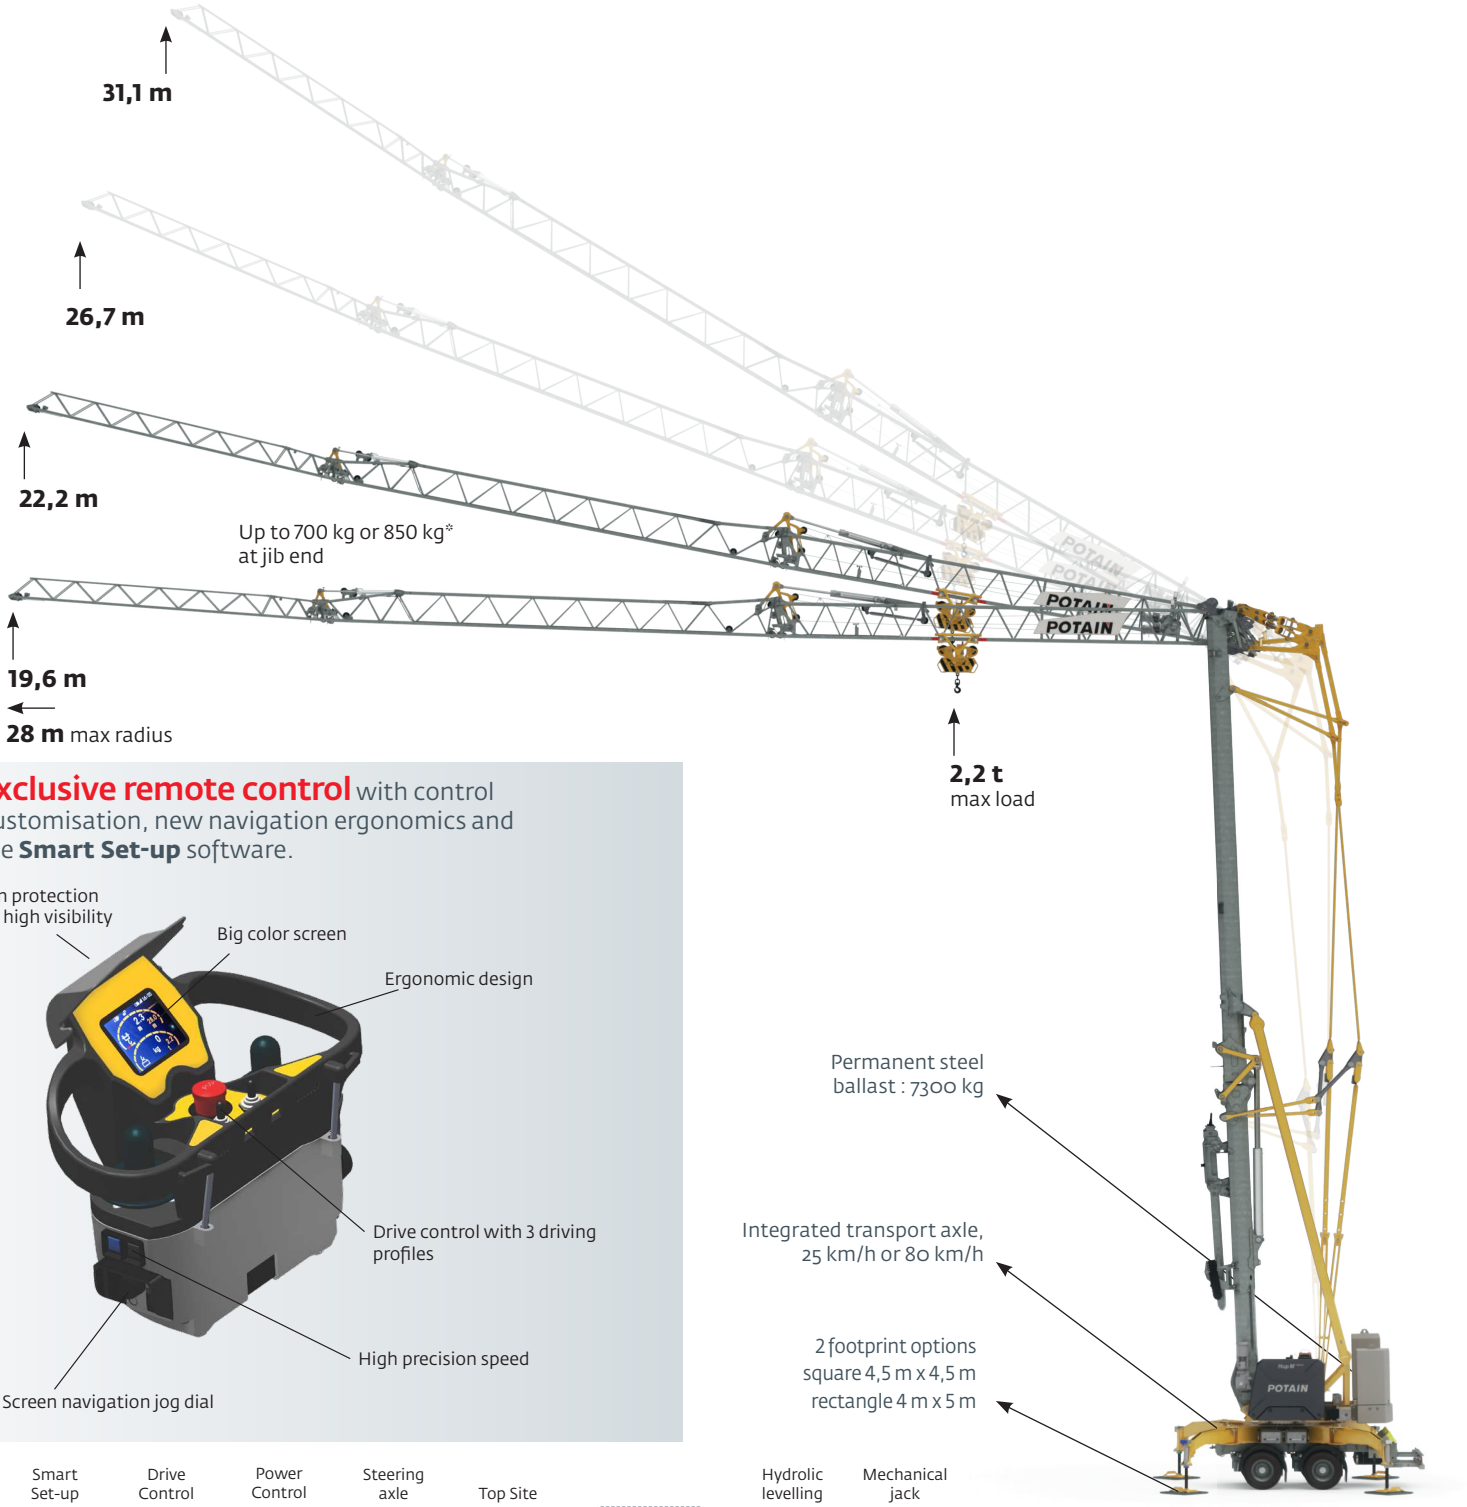

Exclusive remote control with control Customisation, new navigation ergonomics and the **Smart Set-up** software.

Smart Set-up · Drive Control · Power Control · Steering axle · Top Site · POTAIN CONNECT · Hydrolic levelling · Mechanical jack

* with additional ballast

Contact your local dealer for more information or go on www.manitowoc.com

Courtesy of CraneMarket.com

Hup M 28-22 A

The crane for all your projects



Fith wheel

M for Mobile: ready for the road

- Integrated transport axle **80 km/h** to transport the crane direct on the road from one jobsite to another one whatever the distance or 25 km/h transport axle
- EBS breaking system on the 80 km/h version
- One single package with permanent ballast
- Fith wheel or tow bar
- Compact dimensions: the only self-erecting crane with 28 m jib in such a compact transport format



the transport format the most compact in this category

Easy to set up: it reaches places where others can't

- Easy moving thanks to the double steering axle, controled from the remote control
- Maximum steering radius +20°/-20° in order to reach the most confined areas


dual steering axle +20°/-20°

- Dual wheels to face any terrain type
- Hydraulic leveling controled from the remote control
- Integrated battery pack to ensure the steering axle movements and the hydraulic leveling is easily achieved




Tow bar

High performance, versatile and ergonomic crane


- Lastest mechanims generation: LVF Optima DVF optima, HPS High Performance Slewing
- 16 jib configurations, 2 footprint options
- Crane erection and folding by one operator only thanks to the remote control
- Smart Set-up: simple and reactive interface and always the operator driving customisation, high precision speed

New Smart Set-up



steering axle control





hydraulic leveling control

Hup M 28-22 A: return on investment

- Maximum mobility for a self-erecting crane
- A real tower crane productivity on site
- Compatible with the Potain CONNECT solution
- The Smart Set-up advanced operating software
- An environment friendly crane on the jobsite

This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown are subject to modification and may include optional equipment and accessories, or may not include all standard equipment.

© 2022 The Manitowoc Company Inc.
02FL_HupM2822A_102023_EN
www.manitowoc.com

Courtesy of CraneMarket.com