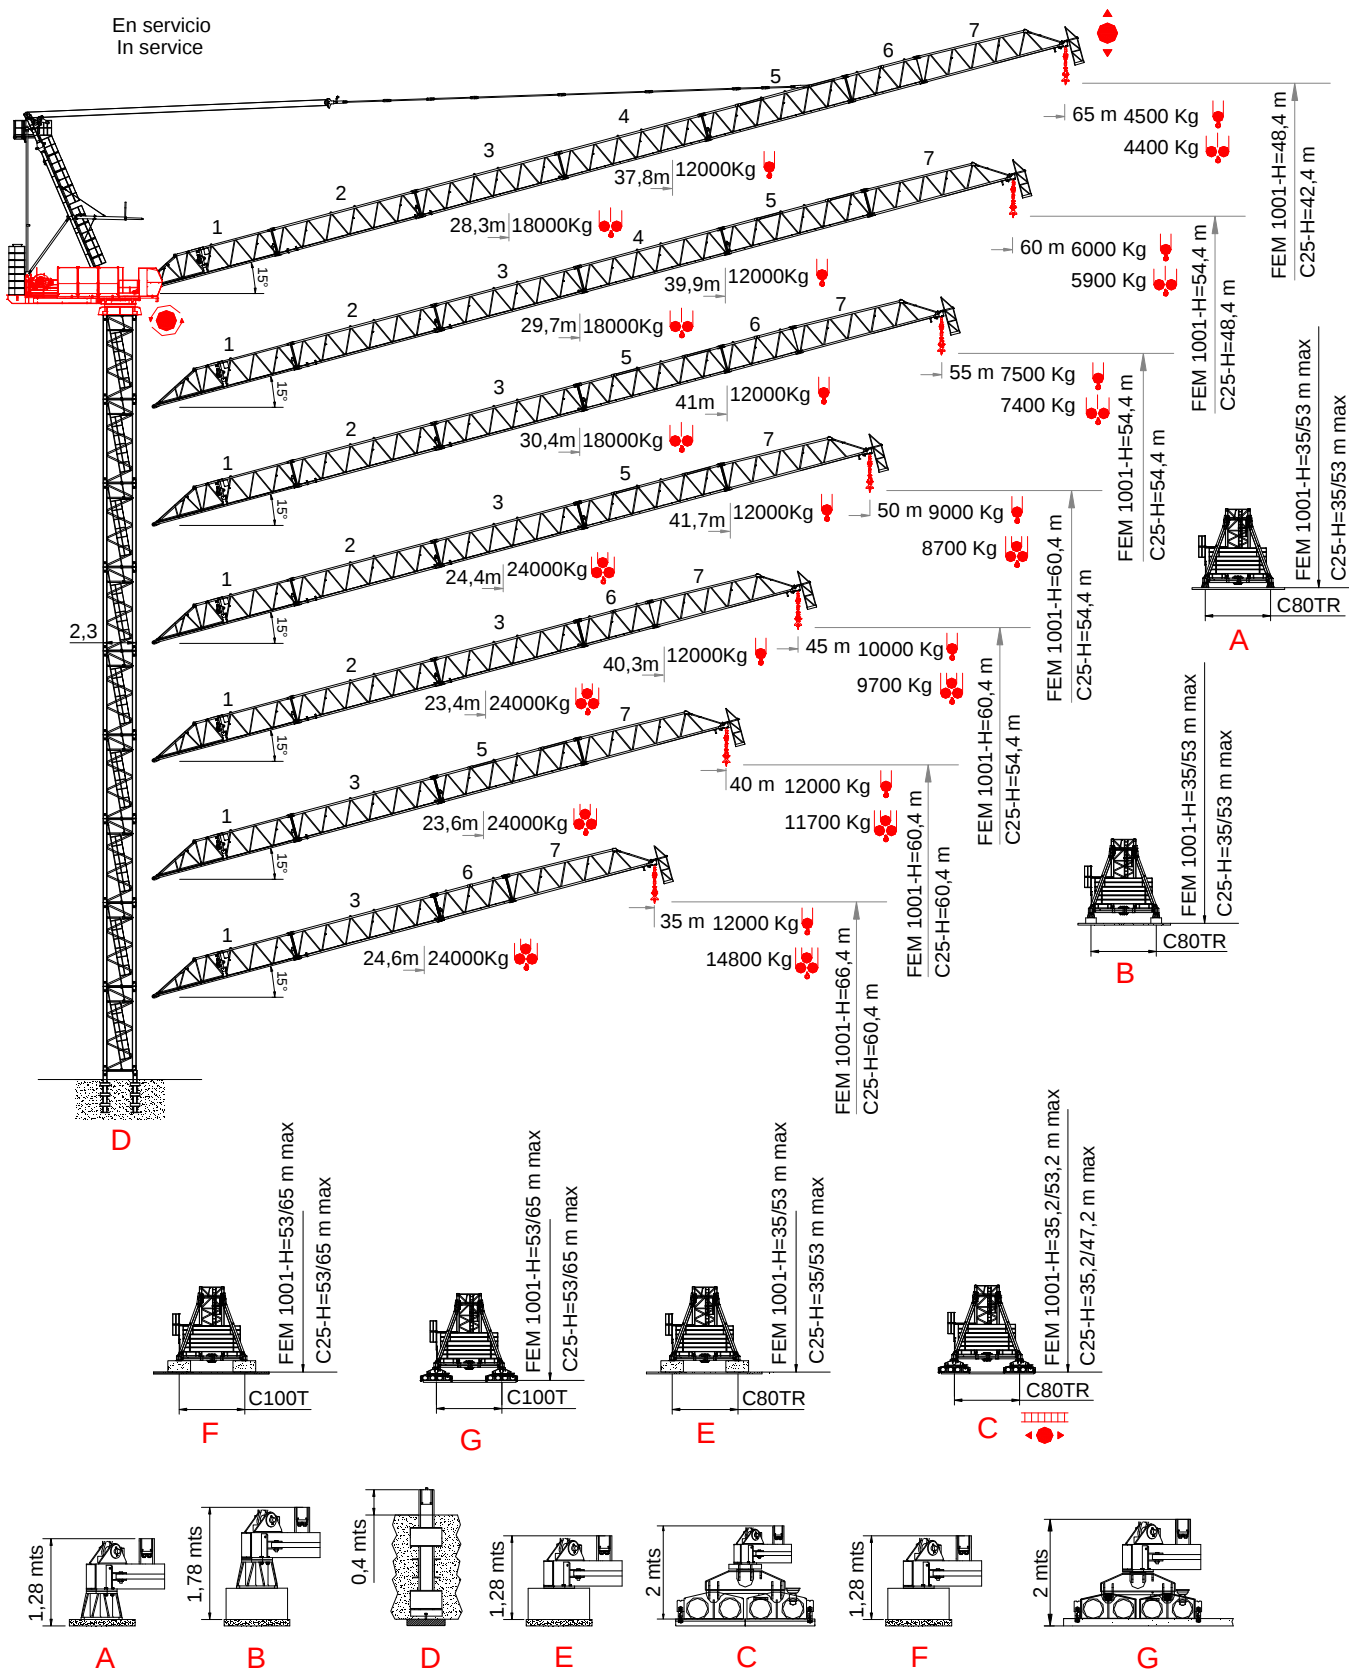



En servicio
In service



DIN/FEM

EN 14439-FEM 1004- C25 / FEM 1001

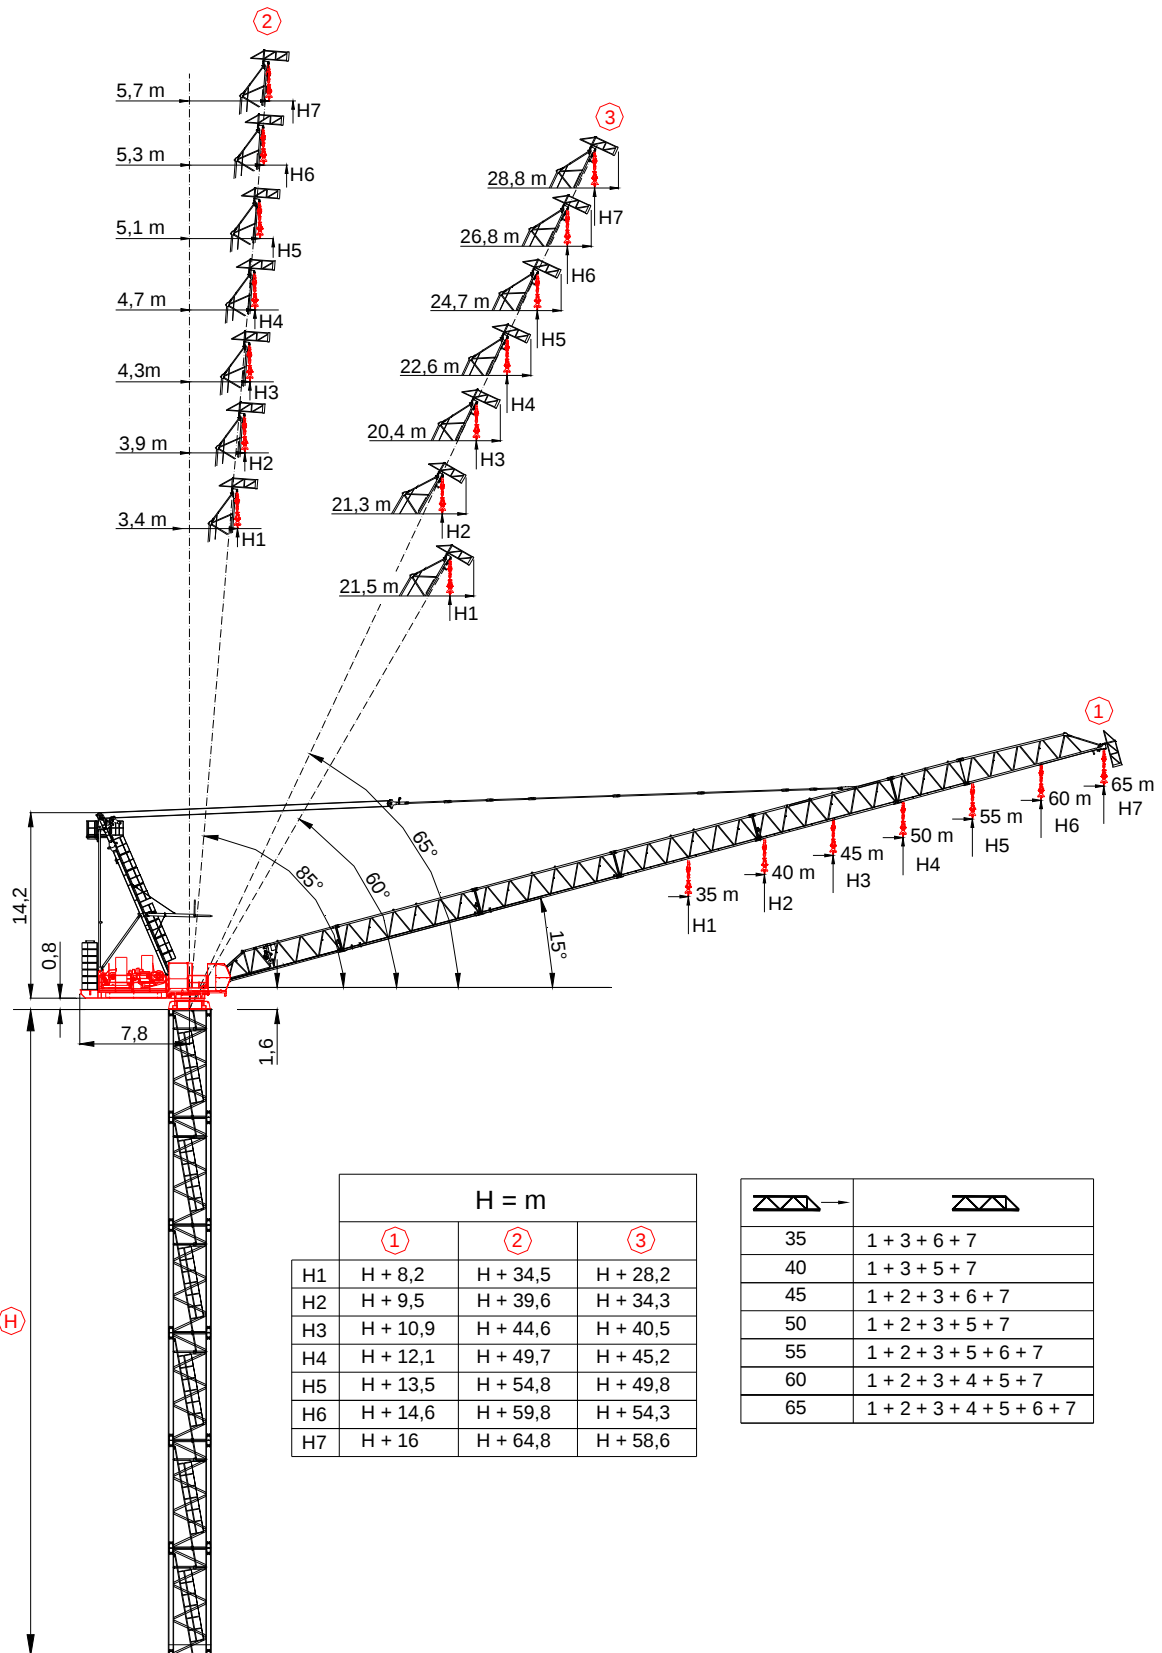Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico -
График грузоподъёмности



- ① Pluma maxima - Portée maxi- Sbraccio massimo - Maximum jib - Max. Ausleger
 ② Pluma min. en servicio - Portée min. in service - Minimum jib (in service) - Sbraccio min. in servizio - Mindest. Ausleger in Betrieb
 ③ Pluma min. fuera de servicio - Portée min. hors service - Minimum jib (out of service) - Sbraccio min. fuori servizio - Mindest. Ausleger ausser Betrieb
 (H) Altura torre - Hauteur mat - Tower height - Altezza torre - Turmhohe

65 m



10	15	20	25	30	35	37,8	40	45	50	55	60	65	m
12000	12000	12000	12000	12000	12000	12000	11044	9151	7642	6411	5385	4500	Kg
10	15	20	25	28,3	30	35	40	45	50	55	60	65	m
18000	18000	18000	18000	18000	16684	13393	10944	9051	7542	6311	5285	4400	Kg

60 m



10	15	20	25	30	31	35	39,9	45	50	55	60	m
12000	12000	12000	12000	12000	12000	12000	12000	10012	8427	7132	6000	Kg
10	15	20	25	29,7	30	35	40	45	50	55	60	m
18000	18000	18000	18000	18000	17929	14473	11901	9912	8327	7032	5900	Kg

55 m



10	15	20	25	30	35	40	41	45	50	55	m
12000	12000	12000	12000	12000	12000	12000	12000	10420	8868	7500	Kg
10	15	20	25	30	30,4	35	40	45	50	55	m
18000	18000	18000	18000	18000	18000	14785	12267	10320	8768	7400	Kg

50 m



10	15	20	25	30	35	40	41,7	45	50	m
12000	12000	12000	12000	12000	12000	12000	12000	10680	9000	Kg
10	15	20	23	25	30,9	35	40	45	50	m
18000	18000	18000	18000	18000	18000	14948	12485	10580	8900	Kg
10	15	20	24,4	25	30	35	40	45	50	m
24000	24000	24000	24000	22635	17986	14702	12258	10367	8700	Kg

45 m



10	15	20	25	30	32	35	40,3	45	m
12000	12000	12000	12000	12000	12000	12000	12000	10000	Kg
10	15	20	22	29,7	30	35	40	45	m
18000	18000	18000	18000	18000	17489	14323	11967	9900	Kg
10	15	20	23,4	25	30	35	40	45	m
24000	24000	24000	24000	21685	17235	14092	11752	9700	Kg

40 m



10	15	20	25	30	32	35	40	m
12000	12000	12000	12000	12000	12000	12000	12000	Kg
10	15	20	25	27	30	35	40	m
18000	18000	18000	18000	18000	18000	14748	11900	Kg
10	15	20	23,6	25	30	35	40	m
24000	24000	24000	24000	22026	17567	14417	11700	Kg


35 m



10	15	18	25	30	33	35	m
12000	12000	12000	12000	12000	12000	12000	Kg
10	15	20	23	25	31,3	35	m
18000	18000	18000	18000	18000	18000	15000	Kg
10	15	20	24,6	25	30	35	m
24000	24000	24000	24000	23331	18681	14800	Kg


FEM 1001 / FEM 1004-C25 / EN 14439 - Mástil / Masts / Maste / Mat / Torre / Torre /
Комплектация башни

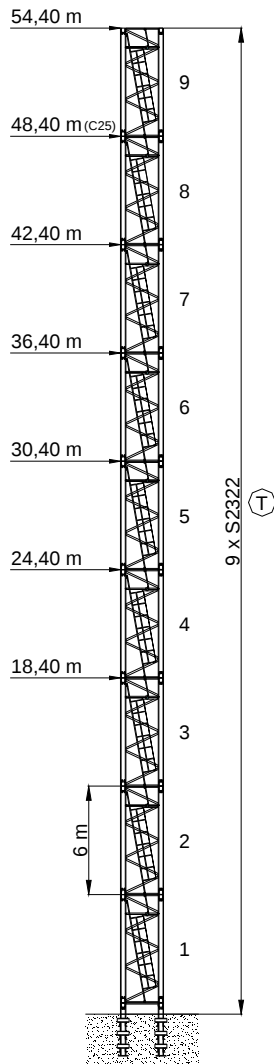T = S2322 16/16 M45L
U = S2326 16/16 M52L




D

	max. H(m)	
	FEM 1004 C25	FEM 1001
35	48,40	54,40
40	48,40	48,40
45	48,40	48,40
50	42,40	48,40
55	42,40	42,40
60	42,40	42,40
65	36,40	36,40

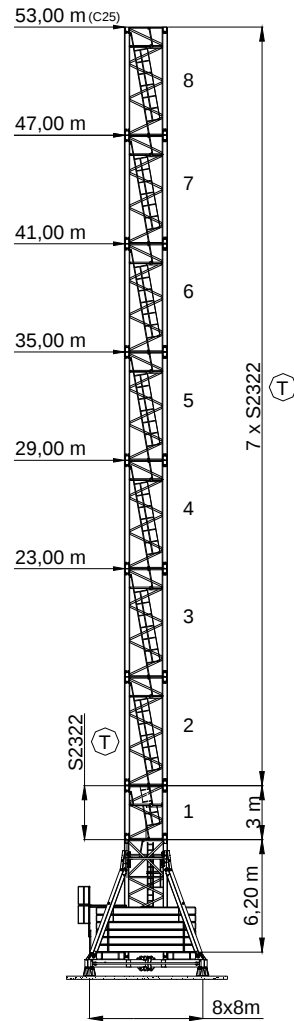

A-B-E


	max. H(m)	
	FEM 1004 C25	FEM 1001
35	53,00	53,00
40	47,00	53,00
45	47,00	47,00
50	47,00	47,00
55	41,00	47,00
60	41,00	41,00
65	35,00	35,00

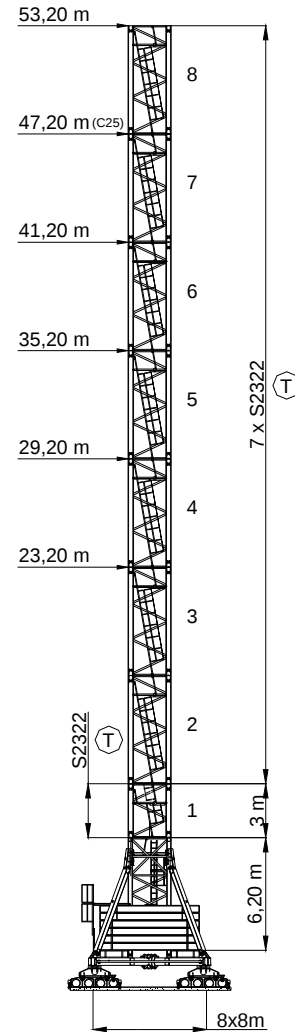


C

	max. H(m)	
	FEM 1004 C25	FEM 1001
35	47,20	53,20
40	47,20	47,20
45	47,20	47,20
50	47,20	47,20
55	41,20	41,20
60	41,20	41,20
65	35,20	35,20

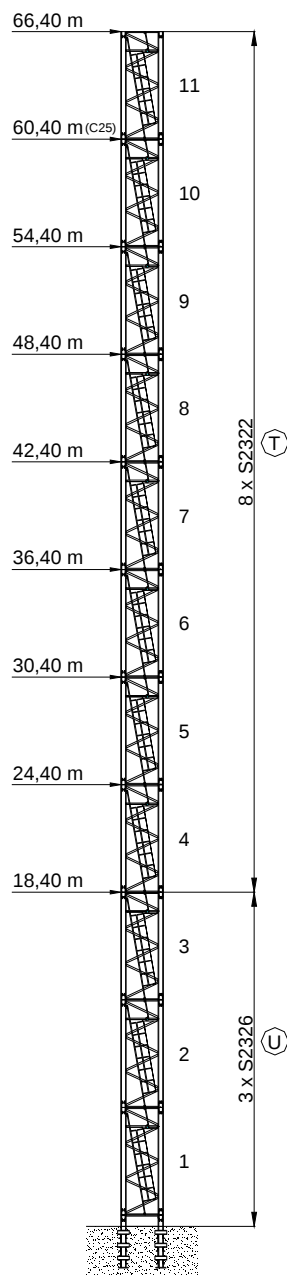
T = S2322 16/16 M45L
U = S2326 16/16 M52L



D

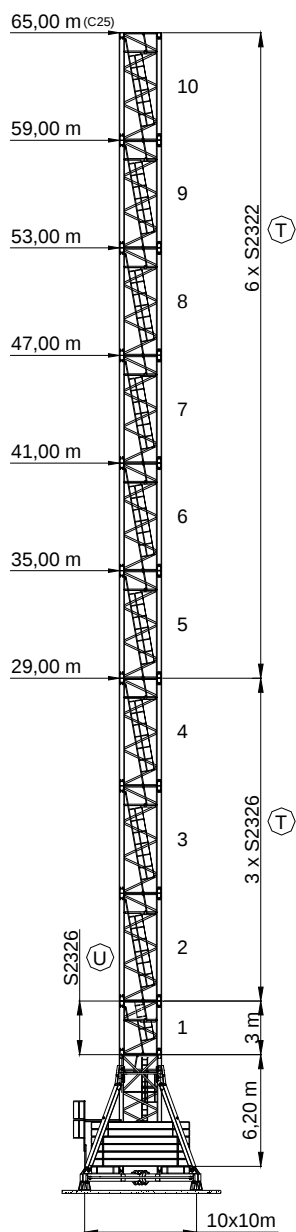

F

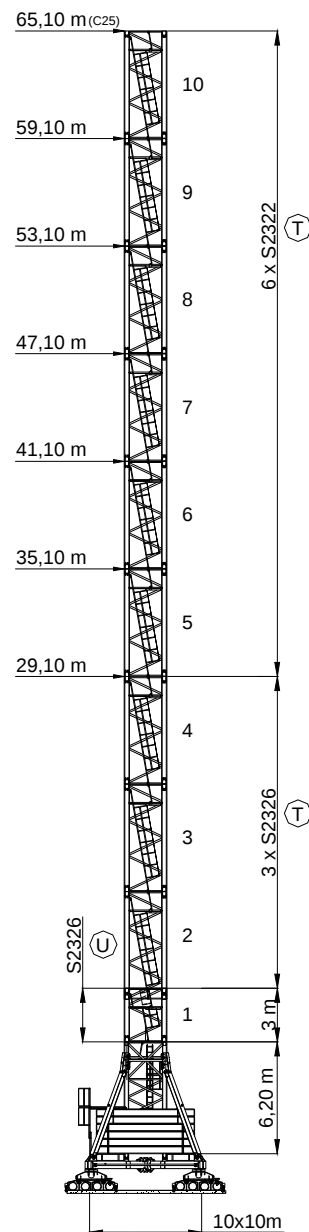

G

	max. H(m)	
	FEM 1004 C25	FEM 1001
35	60,40	66,40
40	60,40	60,40
45	54,40	60,40
50	54,40	60,40
55	54,40	54,40
60	48,40	54,40
65	42,40	48,40

	max. H(m)	
	FEM 1004 C25	FEM 1001
35	64,00	64,00
40	58,00	58,00
45	58,00	58,00
50	58,00	58,00
55	52,00	52,00
60	52,00	52,00
65	46,00	46,00

	max. H(m)	
	FEM 1004 C25	FEM 1001
35	65,10	65,10
40	59,10	65,10
45	59,10	65,10
50	59,10	59,10
55	53,10	59,10
60	53,10	53,10
65	47,10	47,10

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

126 Hp (93Kw)-INV							
	H.B.G 430Mts Ø22				H.B.G 285Mts Ø22		
	m/min	0→35	0→42	0→210	0→23	0→28	0→140
	Kg	12000	10000	2000	18000	15000	3000
	Kw	93	93	93	93	93	93
							
					H.B.G 215Mts Ø22		
					0→17	0→21	0→105
					24000	20000	4000
					93	93	93

		
H.B.G 215Mts Ø22		
0→17	0→21	0→105
24000	20000	4000
93	93	93

				2 min. de 15° a 85° 2 minutes from 15° to 85°	
		Kw		93	
		r.p.m		0→0,72	
		Kw		2 x 18,8	
		m/min		①	
		Kw		①	


		400 V 50 Hz 60 Hz	100m 4x95mm ²
2000/14/CEE 2005/68/CEE	2006/95 /CEE		

500 kVA	220 KW
---------	--------

① Consultarnos-Consultateci-Consult us-Nous consulter-Auf anfrage


-  Elevación / Hoisting / Heben / Levage / Sollevamento
-  Elevación de pluma / Luffing / Ausleger-Einziehen / Relevage / Brandeggio
-  Orientación / Slewing / Schwenken / Orientation / Rotazione
-  Traslacion / Travelling / Schienenfahren / Translation / Traslazione
-  Cable / Rope / Seil / Câble / Fune

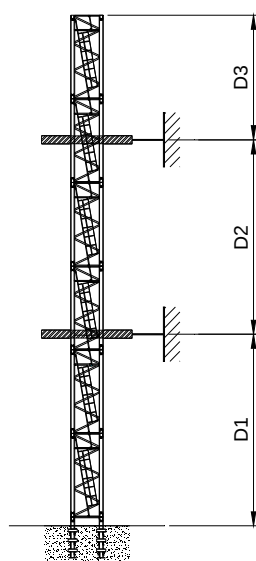Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico -
Процесс наращивания крана



"T"
S 23 22









	D1 min/max	D2 min/max	D3 max
35m	36m/42m	24m/30m	24
40m	30m/42m	24m/30m	24
45m	30m/36m	24m/30m	21
50m	30m/36m	24m/30m	21
55m	30m/36m	24m/30m	21
60m	24m/30m	24m/30m	18
65m	24m/30m	24m/30m	18





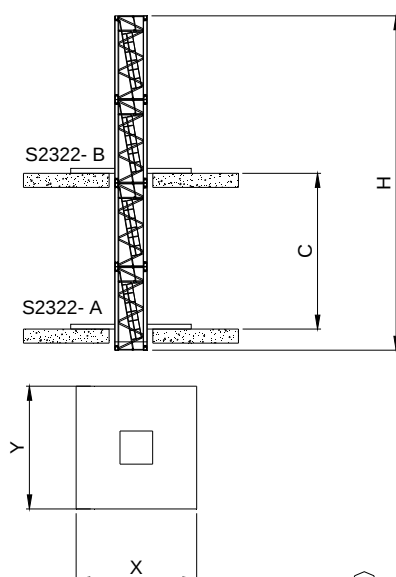







	C (mts)	H (mts)
35m	13	48
	15	54
	16	54
40m 45m 50m	13	42
	15	48
	16	48
55m 60m	13	36
	15	42
	16	42
65m	13	36
	15	36
	16	36





x (mts)	3
y (mts)	2.5

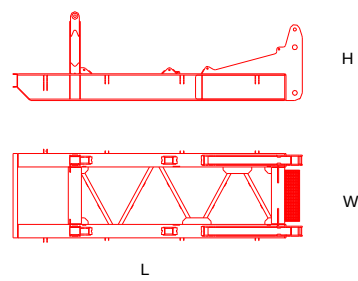❶ Consultarnos-Consultateci-Consult us-Nous consulter-Auf anfrage

	L(m)	W(m)	H(m)	Peso(Kg)
Pluma tramo primero / Jib heel section / Ausleger-Anlenkstück / Pied de fleche / Settore articolato di braccio / 	10.4	1.91	1.93	3300
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück Elément interm. de fleche / Spezzone di braccio / 	10.37	1.90	1.91	1710
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück Elément interm. de fleche / Spezzone di braccio / 	10.37	1.90	1.91	1660
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück Elément interm. de fleche / Spezzone di braccio / 	10.37	1.90	1.91	1510
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück Elément interm. de fleche / Spezzone di braccio / 	10.37	1.90	1.91	1590
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück Elément interm. de fleche / Spezzone di braccio / 	5.27	1.90	1.91	710
Elemento final de pluma / Intermediate jib section / Ausleger-Zwischenstück Elément interm. de fleche / Spezzone di braccio / 	10.50	1.90	1.91	1520
Contrapluma / Counter-jib / Gegenausleger / Contre-fleche / Controbraccio 	6.55	2.10	2.50	7545

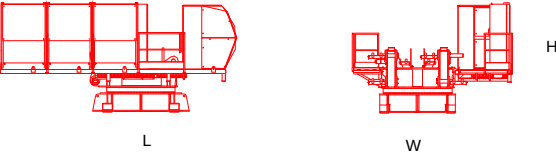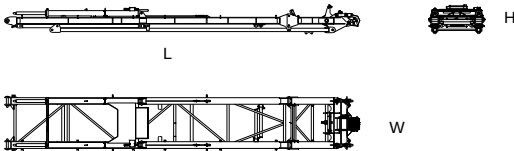	L(m)	W(m)	H(m)	Peso(Kg)
Unidad de rotacion / Complete slewing unit / Drehbühne / Orientation / Rotazione 	4.60	4.84	3.34	14985
Cabina y soporte / Cabin and platform / Kabine und wartungs / Cabine et support / Cabina e supporto / 	7.59	1.82	2.32	3035
Caballette de pluma / Jib gantry / Auslegerabspannbock / Chevalet de haubange de flèche/ Tirante braccio / 	12.9	1.92	1.07	6820
Equipo de elevacion / Hoist winch / Heben / Levage / Sollevamento / 	2.8	2.25	1.61	4050
Equipo de Pluma abatible / Luffing winch / Einziehwerk / Relevage / Brandeggio 	2.8	2.21	1.60	4300
Gancho Inferior / Lower Hook / Den unteren Haken / Crochet inférieure/ Gancio inferiore / 	1.32	0.52	1.19	649
Gancho Superior / Upper Hook / Oberen Haken / Crochet supérieur / Gancio superiore/ 	0.60	0.17	0.86	292

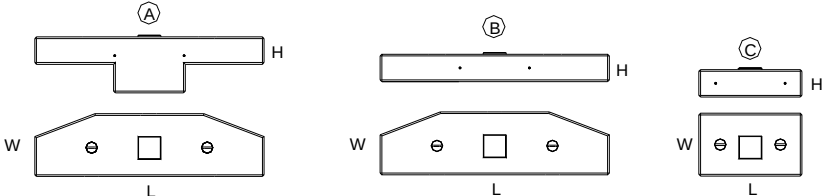		L(m)	W(m)	H(m)	Peso(Kg)
Elemento de torre S23 / Tower section S23 / Turmstück S23 / Elément de mât S23 / Elemento di torre S23 /					
	T	6	2.27	2.29	4650
	U	6	2.31	2.34	6198
Elemento de empotre / Foundation anchor / Fundamentanker / Pieds de scellement / El annegare /					
	S75R16/22	0.5	0.5	2	2840
	S75R16/26	0.5	0.5	2.4	3160
	DIMA	2.31	2.34	0.8	1650
Bloque de contrapeso / Counterweight blocks / Gegengewichtsblöcke / Bloc de contrepoids / Blocco di contrappeso /					
	A	4	1.1	1.01	6200
	B	4	1.1	0.51	4500
	C	1.8	1.1	0.51	2250
Base C80T / Crossbase C80T / Fundamentkreuz C80T / Châsis C80T / Carro base C80T					
		11.8	0.72	0.83	3034
	(x2)	5.9	0.67	0.83	1145
	(x4)	5.38	0.28	0.28	560
		6	2.27	2.29	5900
	(x4)	0.65	0.65	0.45	315
Bloque lastre de base C80T / Base ballast block / Grundballastblöcke / Bloc de lest de base Blocco di zavorra alla base					
	A	5.8	1.5	0.43	8000
	B	4	1.5	0.43	4900
	C	3.5	1.5	0.43	4200
Traslacion / Travelling bogies / Kranfahren / Traslation / Traslazione					
	(x4)	2.94	1.25	0.97	3102

	L(m)	W(m)	H(m)	Peso(Kg)	
Marco trepado externo / Tie-frame / Cadre d'encrage externe / Sopralzo con ancoraggio esterno / 	3.52	3.49	0.42	3900	
Jaula de telescopaje tipo S23 / Climbing cage type S23 / Hydraulikbühne Cage de telescopage type S23 / Gabbia di montaggio S23 / Completa / Full / Vollständige/Complete / completa / 	11.6	3.2	3.3	13500	
Estructura / Steel frame / Struktur/ Construction / Struttura /				9550	
Hidraulico y accesorios / Hydraulic and accessories/ Hydraulik-und Zubehör hydraulique et accessoires / idrauliche ed accessori /				3950	
Marco trepado interno S23 / Floor climbing frame/Cadre d'encrage interne /Sopralzo interno 	3.2	2.8	0.6	4720	
Hidraulico y accesorios / Hydraulic and accessories/ Hydraulik-und Zubehör hydraulique et accessoires / idrauliche ed accessori /				3081	
Tramo trep. A S23 / Tower section A S23 / Turmstück A S23 / Elément de mât A S23 / Elemento di torre a S23 / 	A	6	2.27	2.29	4854
Tramo trep. B S23 / Tower section B S23 / Turmstück B S23 / Elément de mât B S23 / Elemento di torre B S23 / 	B	6	2.27	2.29	4850



40" HC x 14 - HBG 36 mt



x 13 - HBG 36 mt