

SENEBOGEN



119 kW (Stage IIIa)

129 kW (Stage IV)



40 t



30 m



MULTICAB

643E

Mobile telescopic crane

Stage IV

643E Advanced. The E-Series



Telescopic crane TX10

What makes up the E-Series

- Over 25 years of experience in construction and building of highly specialized telescopic cranes
- Uncompromisingly high performance in all areas
- Technology that can be mastered: High-quality components without over-engineering
- Long service life and high value stability

Your top benefits:

1

Green Efficiency

Save fuel – reduce operating costs
Work quietly – protect operator and environment



2

Peak performance

Robust boom system – work on an incline of up to 4°

3

Maximum usability **MULTICAB**

MultiCab – work in comfort
SENCON – work program selection made easy



4

Flexibility in service

Operate under full load – less space required
Strong undercarriage traction – good off-road capability

5

Easy transport

Mobile undercarriage with sliding beam support – ready to go in no time

6


Maintenance and service made easy

SENNEBOGEN control system – easy error diagnostics
Simple maintenance – clear labeling

7

Consultation and support in your area

3 production sites – 2 subsidiaries
130 sales partners – over 350 service stations



Stage IV

- Most modern, powerful engine
- Fuel-efficient
- Clean emissions

643E Technical data, equipment

MACHINE TYPE

Model (type) **643**

ENGINE

Model	Cummins diesel engine QSB 4.5 119 kW / 162 hp at 2,200 rpm Compliant with Tier IIIa emission standards Cummins diesel engine QSB 4.5 129 kW / 175 hp at 2,500 rpm Compliant with Tier IV emission standards Direct injection, turbo-charged, charge air cooling, reduced emissions
Cooling	Water-cooled
Diesel filter	With water separator and heating system
Air filter	Dry filter with integrated pre-separator, automatic dust discharge, main element and safety element, contamination indicator
Fuel tank	360 l
DEF tank	38 l
Electr. system	24 V
Batteries	2 x 155 AH battery disconnect switch
Options	<ul style="list-style-type: none"> Low-temperature package with engine pre-heating and heated diesel filter for temperatures below -20 °C Electric diesel fuel pump

UPPERCARRIAGE

Design	Torsion-resistant box design, precision-crafted, steel bushings for boom bearings. Extremely service-friendly design, longitudinal engine
Electrical system	Central electrical distributor, battery disconnect switch
Cooling system	3-circuit cooling system with high cooling capacity, electronically regulated fan drive for water, charge air and oil cooler
Safety	Rearview and right sideview cameras, LED lighting package
Options	<ul style="list-style-type: none"> Additional LED headlights Up to 2 additional cameras Maritime climate varnishing as corrosion protection Low-temperature package for use at tem- peratures below -20 °C

Options

- Automatic central lubrication for boom
pivot point, luffing cylinder, slewing ring
track and winch drum bearing
- Pinion tooth lubrication for slewing ring



HYDRAULIC SYSTEM

Load sensing/LUDV hydraulic system, electrohydraulic pilot- controlled work functions, load limit sensing control	
Pump type	Swashplate-type variable-displacement piston pump, load pressure-independent flow distri- bution for simultaneous, independent control of work functions
Pump control	Zero-stroke control, on-demand flow control – the pumps only pump as much oil as will actually be used, pressure purging, load limit sensing control
Operating pressure	max. 330 bar
Filtration	High-performance filtration with long change interval
Hydraulic tank	500 l
Control system	Proportional, precision electrohydraulic actuati- on of work movements, 2 electric servo joysticks for work functions, including winch motion display via vibration transducer, additional functions via switches and pedals
Safety	Hydraulic circuits secured with safety valves Pipe fracture safety valve for luffing and tele- scoping cylinders
Options	<ul style="list-style-type: none"> Bio-oil SENNEBOGEN HydroClean 3 µm hydraulic microfilter Electric heater for hydraulic tank for tempe- ratures below -20 °C



SLEWING DRIVE

Gearbox	Compact planetary gear with slant-axis hyd- raulic motor, integrated brake valves
Slewing gear brake	Spring-loaded disk brake, pedal for individual braking
Slewing ring	Externally geared slewing ring, sealed
Rotation speed	0-2 rpm , variable

643E Technical data, equipment



CAB

MULTICAB

Cab type	Multicab, can be inclined by 15°
Cab equipment	Flexibly mounted comfortable cab with super sound insulation. All-weather design, all-round glazing in safety glass and large roof window, adjustable windshield. Flexibly mounted comfortable seat, adjustable according to weight and shock-absorbent. Dashboard overview with swiveling steering column. Variable, controllable cab heating with air circulation stage and particle filter, automatic climate control
Options	<ul style="list-style-type: none"> ■ Cab type E240, can be elevated 240 cm ■ Cab can be tilted 20° ■ Auxiliary heating system with timer ■ Activated carbon filter for cabs ■ Armored-glass windshield ■ Armored-glass sunroof ■ Protective roof grating ■ FOPS protective roof grating ■ Radio with USB and SD connection, MP3 and Bluetooth function



ATTACHMENTS

Design	Decades of experience, state-of-the-art computer simulation, maximum stability and service life, oversized and low-maintenance bearing points, sealed special bearing bushes, precision-crafted
Telescopic boom	4-part with pulley head, continuous hydraulic telescoping to 9-30 m
Hoisting winch	Drive using inclined axis hydraulic motor with compact planetary gear, traction 35 kN (40 kN in the 1st position), cable speed 0-95 m/min., cable diameter 14 mm, 160 m cable length.
Safety brake	Spring-loaded disk brake
Crane safety	Next-generation load moment monitoring, straightforward panel displaying all important data through SENCON display, lifting limit switch, cable exit protection, pressure relief valves and pipe fracture safety device with Eventrecorder
Cylinders	Hydraulic cylinders with high-quality sealing and guide elements

Options

- 6.5 m fly boom, tiltable (0°, 40°), extremely fast and easy setup without auxiliary devices, locked on basic boom when not in use
- Fly boom extension to 13 m, tiltable (0°, 40°)
- Wind movement display using vibrating joystick
- Auxiliary jib, 3.5 t load capacity, 1-strand
- 2nd crane winch: traction 35 kN (4th position), cable speed 0-95 m/min, cable diameter 14 mm, 130 m cable length
- Additional load charts accepted for 2°/4° incline position
- 7.5 kW electrohydraulic emergency unit
- Remote radio control
- Working range restriction




UNDERCARRIAGE

Design	Strong mobile undercarriage with integrated 4-point outrigger, steering axle as hydraulically locking pendulum axle. Pendulum axle cylinder with pipe-fracture safety valves
Travel drive	All-wheel drive powered by an adjustable hydraulic motor with direct-mounted, automatically actuated brake valve and 2-stage power shift transmission. Strong 40 t planetary axles with integrated steering cylinders, 2-circuit multi-disk service brake.
Steering	All-wheel steering
Parking brake	Spring-loaded disk brake
Tires	12.00-20, 8x
Speed	0-6 km/h off-road, 0-25 km/h on-road



OPERATING WEIGHT


Mass	Approx. 27 t with 30 m telescopic boom, 13 m fly boom, 1.9 t counterweight, 25 t hook, 2 hoisting winches.
Notice	Operating weight varies by model.

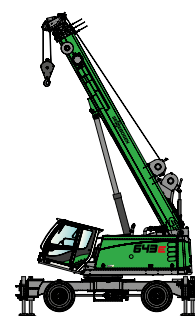

643E Crane equipment



30 m main boom (HA)

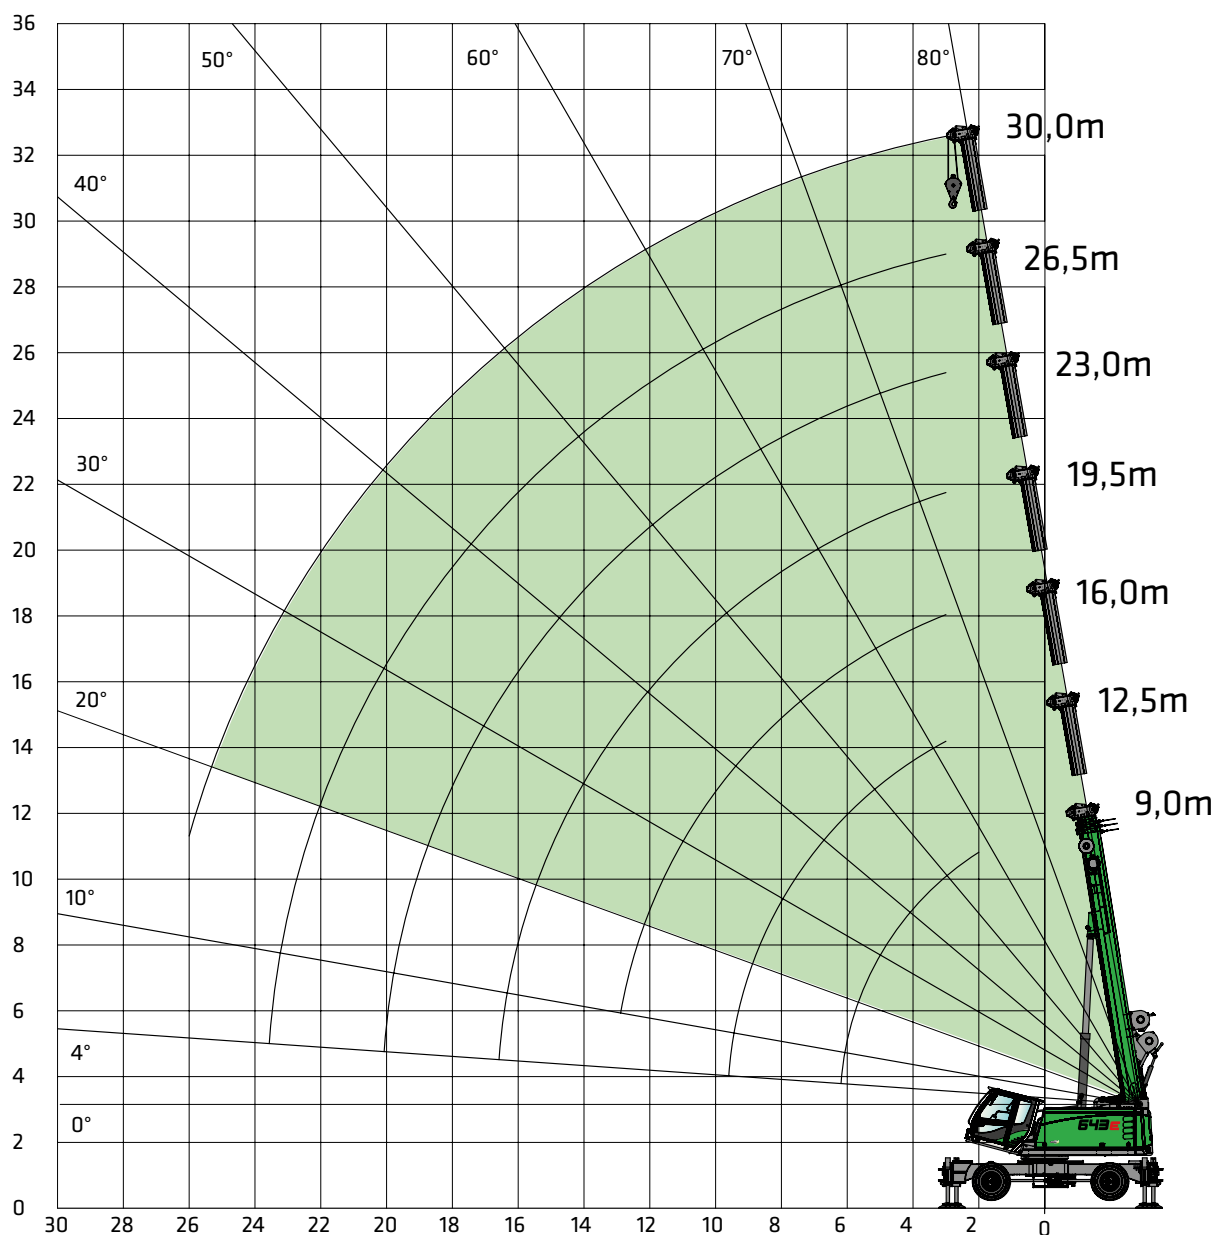

Hook

Capacity	Weight	Number of strands								
		9	8	7	6	5	4	3	2	1
32 t 4-pulley	300 kg	31,500 kg	28,000 kg	24,500 kg	21,000 kg	17,500 kg	14,000 kg	10,500 kg	7,000 kg	3,500 kg
25 t 3-pulley	220 kg			24,500 kg	21,000 kg	17,500 kg	14,000 kg	10,500 kg	7,000 kg	3,500 kg
4 t	40 kg									3,500 kg

643E Load ratings



30 m main boom (HA)

	Boom length [m]																				
	9.0			12.5			16.0			19.5			23.0			26.5			30.0		
Counterweight [t]																					
	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
Outrigger width [%]																					
	100	50	free	100	50	free	100	50	free	100	50	free	100	50	free	100	50	free	100	50	free
Outreach [m]																					
2.0	40.0*	35.0	21.6																		
3.0	30.1	27.1	12.0	20.0	20.0	12.0	15.0	15.0	12.0	14.0	14.0	12.5	11.0	11.0	11.0	8.9	8.9	8.9	5.0	5.0	5.0
4.0	24.8	20.4	7.3	20.0	20.0	7.1	15.0	15.0	7.1	14.0	14.0	7.6	11.0	11.0	7.8	8.9	8.9	8.1	5.0	5.0	5.0
5.0	18.8	12.8	4.9	18.5	12.6	4.8	15.0	12.5	4.7	13.3	13.1	5.1	11.0	11.0	5.4	8.6	8.6	5.6	5.0	5.0	5.0
6.0	13.4	9.0	3.4	13.2	8.9	3.3	13.1	8.8	3.2	12.0	9.3	3.6	10.3	9.6	3.8	8.3	8.3	4.0	5.0	5.0	4.0
7.0	12.7/6.2	8.6/6.2	2.8/6.2	9.9	6.6	2.1	9.9	6.6	2.1	10.4	7.0	2.5	9.5	7.3	2.8	7.8	7.5	3.0	5.0	5.0	2.9
8.0				7.8	5.1	1.4	7.8	5.0	1.4	8.2	5.4	1.7	8.6	5.7	2.0	7.4	5.9	2.2	5.0	5.0	2.2
9.0				6.2	3.9	1.0	6.2	3.9	1.0	6.6	4.3	1.3	7.0	4.6	1.4	6.9	4.8	1.6	5.0	5.0	1.6
10.0				5.5/9.6	3.4/9.6	0.6/9.6	5.1	3.1	0.6	5.5	3.4	0.8	5.8	3.7	1.1	6.0	3.9	1.3	5.0	4.1	1.2
11.0							4.2	2.5		4.5	2.8	0.5	4.9	3.0	0.7	5.1	3.2	0.9	5.0	3.4	0.9
12.0							3.4	2.0		3.8	2.2		4.1	2.5	0.5	4.3	2.7	0.6	4.5	2.9	0.6
13.0							2.8	1.5		3.2	1.8		3.5	2.1		3.7	2.3	0.4	3.9	2.4	0.4
14.0										2.7	1.5		3.0	1.7		3.2	1.9		3.4	2.0	
15.0										2.3	1.1		2.5	1.4		2.8	1.6		2.9	1.7	
16.0										1.9	0.9		2.2	1.1		2.4	1.3		2.5	1.4	
17.0										1.7/16.6	0.7/16.6		1.8	0.9		2.1	1.1		2.2	1.2	
18.0													1.6	0.7		1.8	0.9		1.9	1.0	
19.0													1.3	0.5		1.5	0.7		1.7	0.8	
20.0													1.1			1.3	0.5		1.4	0.7	
21.0													1.1/20.1			1.1			1.2	0.5	
22.0																0.9			1.1		
23.0																0.7			0.9		
24.0																0.7/23.6			0.7		
25.0																			0.6		
26.0																			0.5		
27.0	Table no.: 643M-30.0/75/2642/1.9/12.16																				
28.0	Table no.: 643M-30.0/75/2000/1.9/12.16 Table no.: 643M-30.0/75/1000/1.9/12.16																				
Number of strands	9	8	4	6	6	4	5	5	4	4	4	4	4	4	4	3	3	3	2	2	2
I	0%			50%			100%			100%			100%			100%			100%		
II	0%			0%			0%			25%			50%			75%			100%		
III	0%			0%			0%			25%			50%			75%			100%		
at collapsible jib																					
Load capacity reduction [kg]	570			420			330			280			240			210			180		


* only possible with special equipment

Subject to change. See page 12 for notes on load lift charts.

643E Crane equipment



6.5 m or 13 m fly boom (SA)

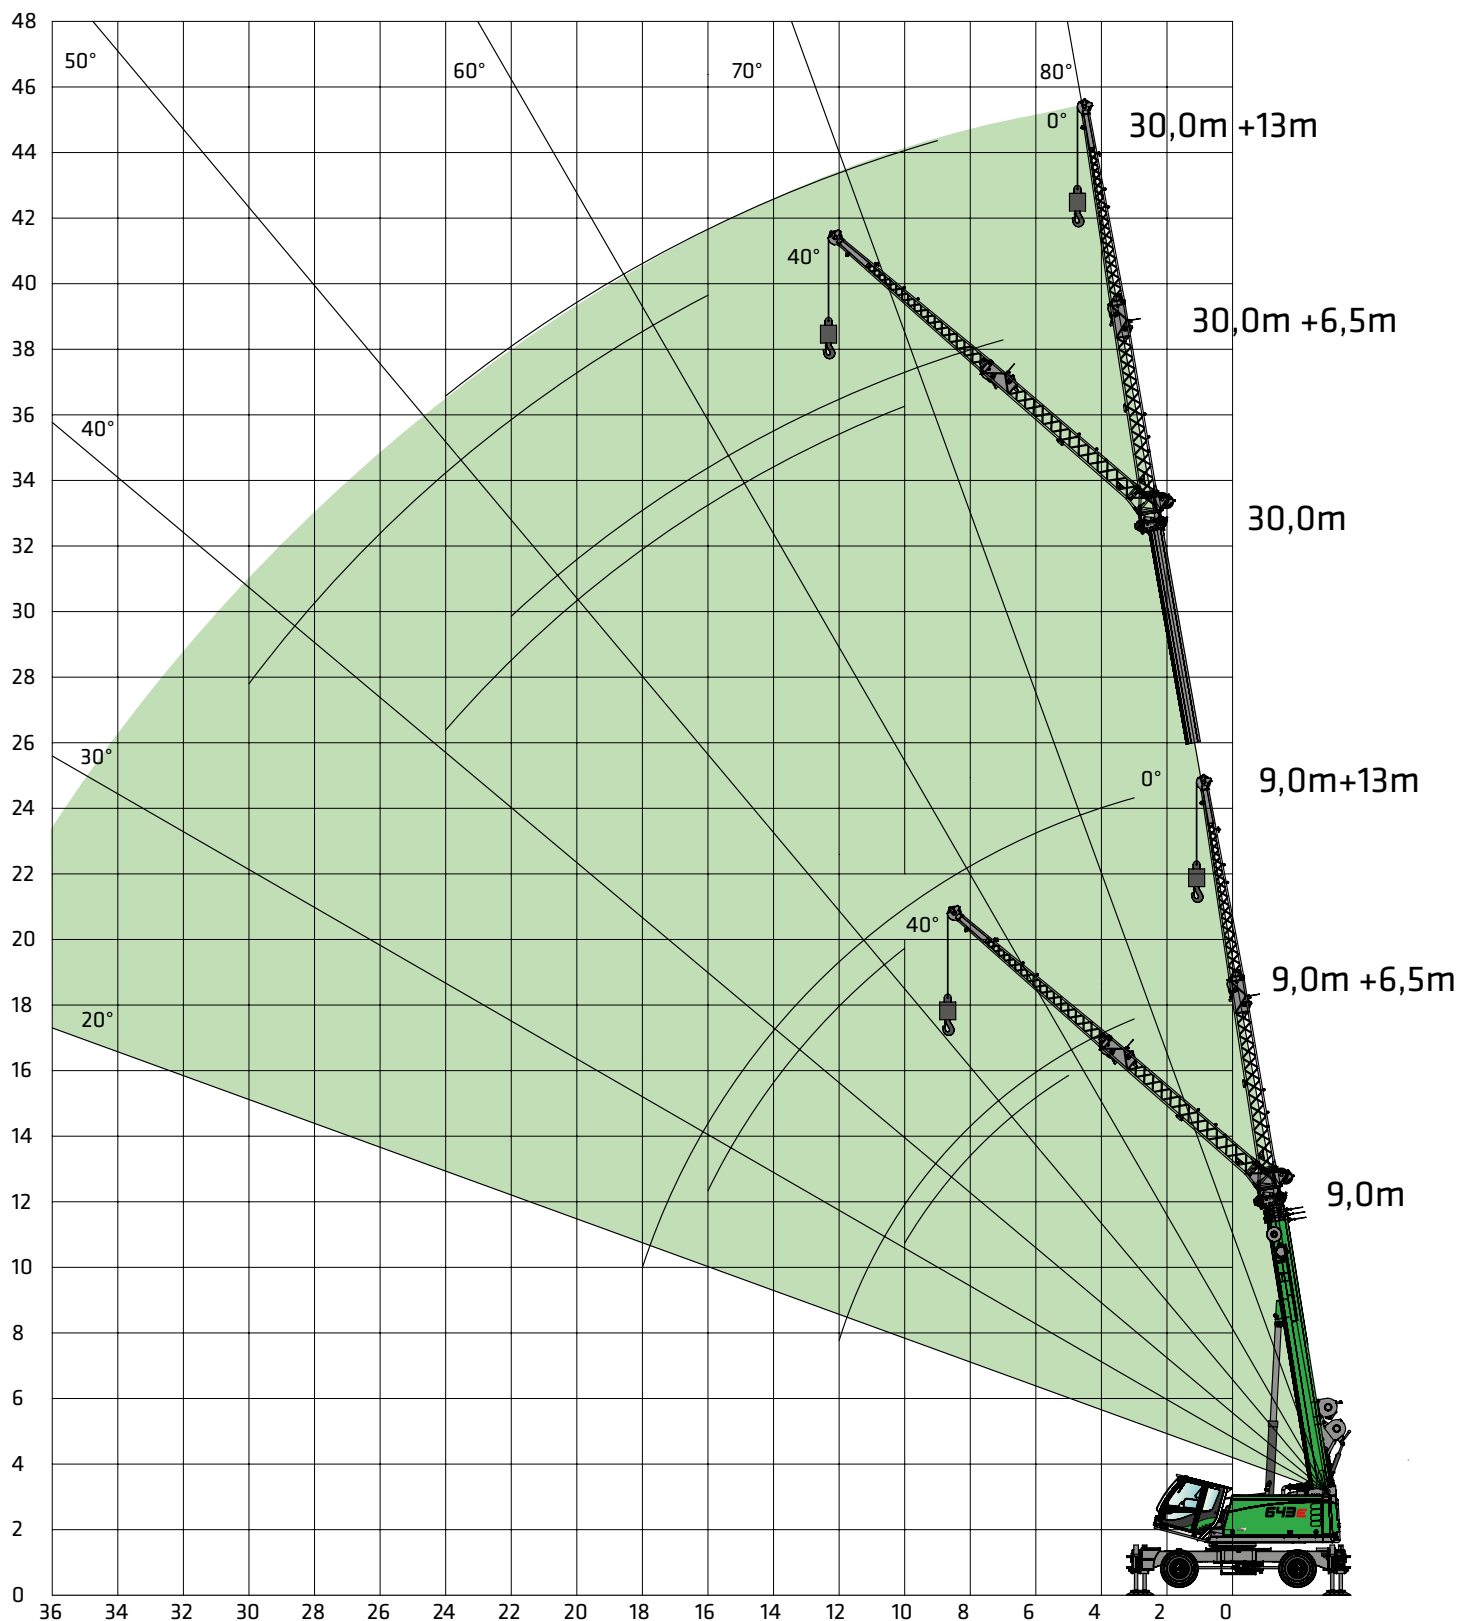

643E Load ratings



6.5 m fly boom (SA)

1.9 t	Telescopic boom length [m]							
	9.0		16.0		23.0		30.0	
100%	0°	40°	0°	40°	0°	40°	0°	40°
Outreach [m]								
2.0								
3.0	6.0		6.0					
4.0	6.0		6.0					
5.0	5.5	3.5	6.0		6.0			
6.0	4.9	3.3	6.0	3.6	6.0			
7.0	4.4	3.1	5.9	3.4	6.0		3.5	
8.0	4.0	2.9	5.4	3.3	5.9	3.4	3.5	
9.0	3.7	2.8	5.0	3.2	5.5	3.3	3.5	
10.0	3.4	2.7	4.6	3.1	4.7	3.2	3.5	3.2
11.0	3.1		4.3	3.0	4.0	3.2	3.5	3.0
12.0	2.8		3.7	2.8	3.5	3.1	3.2	2.9
13.0			3.2	2.8	3.0	3.0	2.8	2.8
14.0			2.8	2.8	2.6	2.9	2.5	2.7
15.0			2.4		2.3	2.8	2.1	2.5
16.0			2.1		2.0	2.4	1.9	2.4
18.0			1.5		1.5	1.8	1.4	1.8
20.0					1.1	1.3	1.0	1.3
22.0					0.7		0.7	1.0
24.0								0.6
26.0								
28.0								
30.0								
32.0								
34.0								
36.0								
38.0	Table no.: 643R-30.0/75/2642/1.9/12.16 SA6.5							
Number of strands	2	1	2	1	2	1	1	1
I	0%		100%		100%		100%	
II	0%		0%		50%		100%	
III	0%		0%		50%		100%	

Subject to change. See page 12 for notes on load lift charts.

643E Load ratings



13 m fly boom (SA)

1.9 t	Telescopic boom length [m]							
	9.0		16.0		23.0		30.0	
100%	0°	40°	0°	40°	0°	40°	0°	40°
Outreach [m]								
2.0								
3.0	3.0							
4.0	3.0							
5.0	3.0		3.0					
6.0	3.0		3.0					
7.0	2.9		3.0		3.0			
8.0	2.6		3.0		3.0			
9.0	2.3		2.9		3.0		2.0	
10.0	2.1	1.6	2.7		2.9		2.0	
11.0	2.0	1.5	2.5		2.7		2.0	
12.0	1.8	1.4	2.4	1.5	2.6		2.0	
13.0	1.7	1.4	2.2	1.5	2.5		2.0	
14.0	1.6	1.3	2.1	1.5	2.4	1.5	2.0	
15.0	1.6	1.3	2.0	1.4	2.3	1.5	2.0	
16.0	1.5	1.3	1.9	1.4	2.2	1.4	2.0	1.5
18.0	1.1		1.7	1.3	1.8	1.4	1.7	1.4
20.0			1.6	1.3	1.5	1.3	1.3	1.4
22.0			1.3		1.1	1.3	1.0	1.3
24.0			1.0		0.9	1.3	0.8	1.3
26.0					0.6	1.0		1.0
28.0								0.7
30.0								0.5
32.0								
34.0								
36.0								
38.0	Table no.: 643R-30.0/75/2642/1.9/12.16 SA13							
Number of strands	1	1	1	1	1	1	1	1
I	0%		100%		100%		100%	
II	0%		0%		50%		100%	
III	0%		0%		50%		100%	

643E Load ratings




























Auxiliary jib (HA-S)

	Boom length [m]																				
	9.0			12.5			16.0			19.5			23.0			26.5			30.0		
Counterweight [t]																					
Outrigger width [%]	100	50	free	100	50	free	100	50	free	100	50	free	100	50	free	100	50	free	100	50	free
Outreach [m]																					
2.0																					
3.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5/3.5	3.5/3.5	3.5/3.5
4.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
5.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
6.0	3.5	3.5	3.3	3.5	3.5	3.2	3.5	3.5	3.1	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
7.0	3.5/6.7	3.5/6.7	2.2/6.7	3.5	3.5	2.0	3.5	3.5	2.0	3.5	3.5	2.4	3.5	3.5	2.7	3.5	3.5	2.9	3.5	3.5	2.9
8.0				3.5	3.5	1.3	3.5	3.5	1.3	3.5	3.5	1.6	3.5	3.5	1.9	3.5	3.5	2.1	3.5	3.5	2.2
9.0				3.5	3.5	0.9	3.5	3.5	0.9	3.5	3.5	1.2	3.5	3.5	1.3	3.5	3.5	1.5	3.5	3.5	1.6
10.0				3.5	2.8		3.5	3.0	0.5	3.5	3.3	0.7	3.5	3.5	1.0	3.5	3.5	1.2	3.5	3.5	1.2
11.0				3.5/10.2	2.6/10.2		3.5	2.4		3.5	2.7		3.5	2.9	0.6	3.5	3.1	0.8	3.5	3.3	0.9
12.0							3.3	1.9		3.5	2.1		3.5	2.4		3.5	2.6	0.5	3.5	2.8	0.6
13.0							2.7	1.4		3.1	1.7		3.4	2.0		3.5	2.2		3.5	2.3	
14.0							2.3/13.7	1.0/13.7		2.6	1.4		2.9	1.6		3.1	1.8		3.3	1.9	
15.0													2.4	1.3		2.7	1.5		2.8	1.6	
16.0										1.8	0.8		2.1	1.0		2.3	1.2		2.4	1.3	
17.0										1.6	0.6		1.7	0.8		2.0	1.0		2.1	1.1	
18.0										1.5/17.2	0.5/17.2		1.5	0.6		1.7	0.8		1.8	0.9	
19.0													1.2			1.4	0.6		1.6	0.7	
20.0													1.0			1.2			1.3	0.6	
21.0													1.0/20.7			1.0			1.1		
22.0																0.8			1.0		
23.0																0.7			0.8		
24.0																0.5			0.6		
25.0																0.5/24.2			0.5		
26.0																					
27.0	Table no.: 643M-30.0/75/2642/1.9/12.16 HA-S																				
28.0	Table no.: 643M-30.0/75/2000/1.9/12.16 HA-S Table no.: 643M-30.0/75/1000/1.9/12.16 HA-S																				
Number of strands	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
I	0%			50%			100%			100%			100%			100%			100%		
II	0%			0%			0%			25%			50%			75%			100%		
III	0%			0%			0%			25%			50%			75%			100%		
at collapsible jib																					
Load capacity reduction [kg]	-			-			-			-			-			-			-		

Subject to change. See page 12 for notes on load lift charts.


643E Load capacity programs

Counterweight [t]	Main boom HA			Auxiliary jib HA-S			6.5 m fly boom (SA)			Fly boom SA 13 m		
												
Undercarriage track width	 100%	 50%	 free	 100%	 50%	 free	 100%	 50%	 free	 100%	 50%	 free
 1.9 t	 360°	 360°	 360°	 360°	 360°	 360°	 360°	—	—	 360°	—	—

Note:


- Specified load ratings only apply when machine is level ($\pm 0.3^\circ$) and stable.
- Load ratings are specified in tons and apply to 360 degrees.
- Load ratings are in accordance with DIN 15019.2 and ISO 4305.
- The weight of the load handling devices (e.g., hook, suspension gear) must be subtracted from the load ratings.
- Load ratings must be limited or reduced when conditions are unfavorable, such as soft or uneven ground, slopes, wind, lateral loads, swinging loads, jerking or sudden stopping of load, operator inexperience, driving with load.
- Permissible rope winch per strand in crane mode for cable diameter 14 mm – 3,500 kg
- The specified load ratings are for reference only. The currently valid load ratings can be found in the tables in the operating manual.
- Optional load capacities are also available for a $2^\circ/4^\circ$ incline position.

643E Fly boom


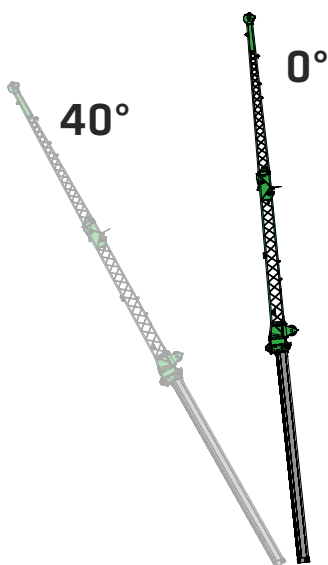


Fly boom variants


- **6.5 m fly boom***
Max. 2-strand, possible offset angle $0^\circ/40^\circ$
- **13 m fly boom***
with 6.5 m extension,
1-strand, offset angle $0^\circ/40^\circ$
- **Auxiliary jib**
3.5 t load capacity, 1-strand

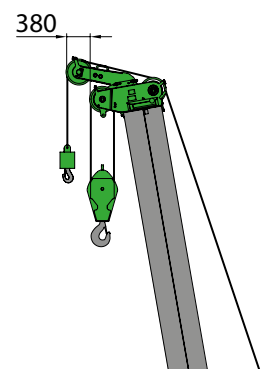



643E Transport dimensions and weights

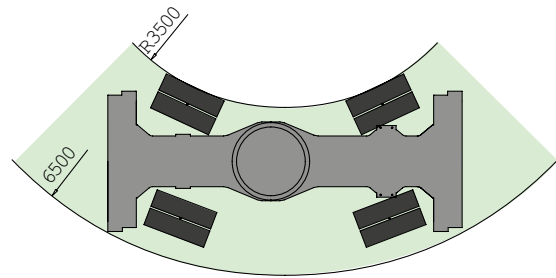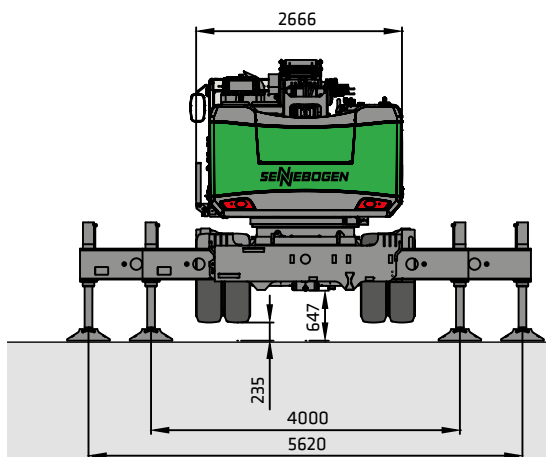


643 mobile undercarriage with integrated 4-point outrigger
Service weight: approx. 27 t (with 13 m fly boom, 2 hoisting winches, 1.9 t counterweight and 25 t hook)

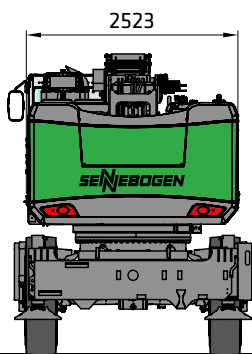

Single tires
4 x 14.00-24

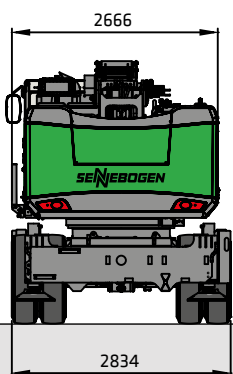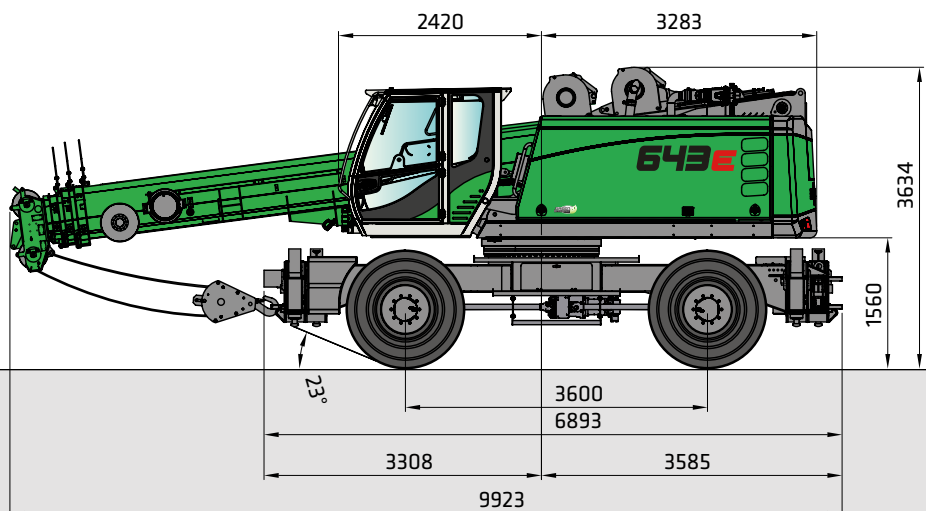


Twin tires
8 x 12.00-20

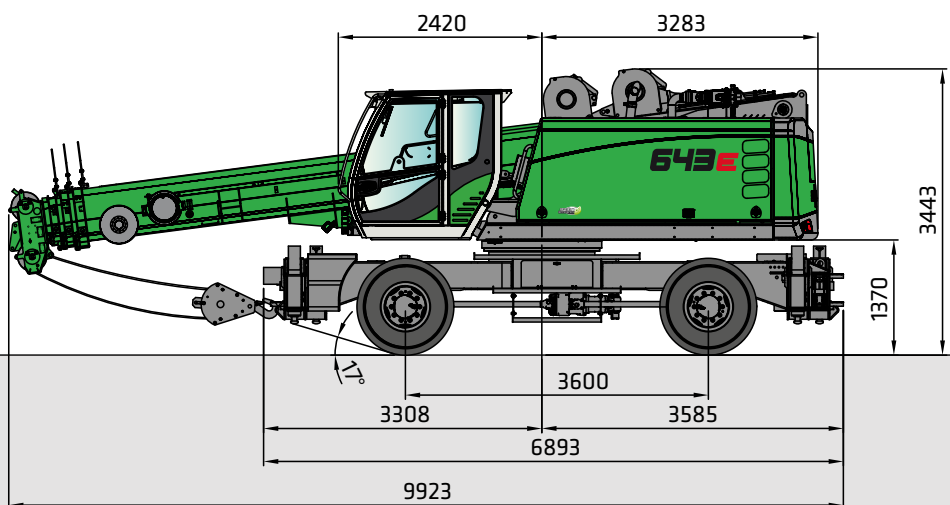


Transport weight: approx. 27,000 kg (13 m fly boom, 2 hoisting winches)

643E Transport dimensions and weights

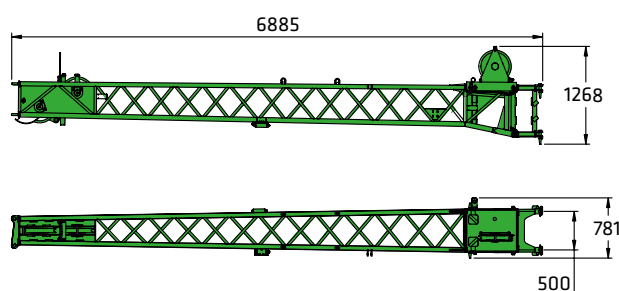


6.5 m fly boom

600 kg

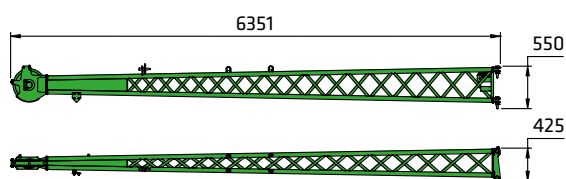

6.5 m fly boom extension

250 kg

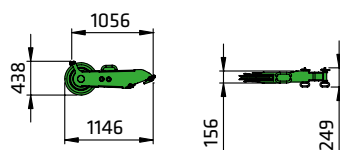

Auxiliary jib

50 kg

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin green lines. There are no margins, text, or other markings on the page.

643E

M



This catalog describes machine models, scopes of equipment of individual models, and configuration options (standard equipment and optional equipment) of the machines delivered by SENNEBOGEN Maschinenfabrik. Machine illustrations can contain optional equipment and supplemental equipment. Actual equipment may vary in a tolerance range depending on the country to which the machines are delivered, especially in regard to standard and optional equipment

All product designations used may be trademarks of SENNEBOGEN Maschinenfabrik GmbH or other supplying companies, and any use by third parties for their own purposes may violate the rights of the owners.

Please contact your local SENNEBOGEN sales partner for information concerning the equipment variants offered. Requested performance characteristics are only binding if they are expressly stipulated upon conclusion of the contract. Delivery options and technical features are subject to change. Errors and omissions excepted. Equipment is subject to change, and rights of advancement are reserved.

© SENNEBOGEN Maschinenfabrik GmbH, Straubing/Germany. Reproduction in whole or in part only with written consent of SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany.

SENNEBOGEN

SENNEBOGEN
Maschinenfabrik GmbH
Sennebogenstraße 10
94315 Straubing, Germany

Tel. +49 9421 540-144/146
marketing@sennebogen.de

Order no. 299149
643 M-E-081710-011910-0919d

GO FOR GREEN

 www.sennebogen.com
Courtesy of CraneMarket.com