

# Straight Jib Boom



## TB66J

# Snorkel

[www.snorkelusa.com](http://www.snorkelusa.com)



# TB66J

## TELESCOPING JIB BOOM

### PLATFORM

|                    |                         |
|--------------------|-------------------------|
| Height .....       | 66' (20.1 m)            |
| A. Size .....      | 30" x 60" (76 x 152 cm) |
| Capacity .....     | 500 lbs (227 kg)        |
| Construction ..... | Steel                   |

### MACHINE DIMENSIONS

|                               |                |
|-------------------------------|----------------|
| B. Stowed Height .....        | 8'9" (2.7 m)   |
| C. Stowed Length .....        | 33' (10.1 m)   |
| D. Wheelbase .....            | 10' (3 m)      |
| Width .....                   | 8'1/2" (2.5 m) |
| Weight .....                  | 25,000 lbs     |
| Tire Size (Foam Filled) ..... | 15 x 19.5      |

### PERFORMANCE

|                          |                  |
|--------------------------|------------------|
| Horizontal Reach .....   | 56' (17.1 m)     |
| Power Source .....       | Gas or Diesel    |
| Fuel Capacity .....      | 40 gal (151.4 l) |
| Hydraulic tank cap. .... | 35 gal (132.5 l) |
| Drive speed              |                  |
| Elevated .....           | 1 mph (1.6 kph)  |
| Stowed .....             | 3 mph (4.8 kph)  |
| Gradeability .....       | 25%              |





### OPTIONS

- Operator horn
- Platform control box cover
- Platform work and drive lights
- Flashing light on boom
- Swinging gate
- Sandblast protection kit
- Hydraulic system cold weather warm-up kit
- Dual Fuel
- Cold weather start kit
- AC Generator
- Drive motion alarm
- Tow kit
- Four wheel drive
- Airline to platform
- Platform - 30" x 92" (76 x 234 cm) Aluminum
- Spark arrestor muffler

**DANGER:** Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

### STANDARD FEATURES

- Fully proportional ramp-on controls
- Rheostat control at ground for boom/platform functions
- 180 degree hydraulic platform rotation
- 12 volt emergency operated power
- Manual bleed down valve
- Engine anti-restart
- Driveable at full height
- Tilt alarm
- 125 volt GFCI AC outlet
- Aluminum upper booms
- Hour meter
- High engine temp/low oil pressure shut down
- Tie down lug
- Foam filled tires
- Lifting lug

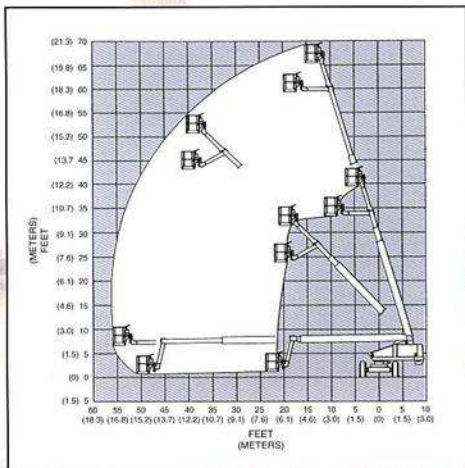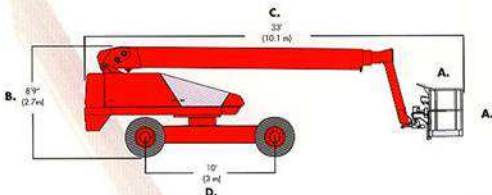

# Snorkel

An ISO 9001 Registered Company  
Printed in U.S.A. TB66J 10-02

**Manufacturing Plant**  
2009 Roseport Road  
Elwood, KS 66024  
800-255-0317 Toll Free  
785-989-3000 Office  
785-989-3070 Fax

**Australia**  
26 Redfern Road  
Wetherill Park NSW  
2164 Australia  
(02) 9725 4000 tel  
(02) 9609 3057 fax

Courtesy of CraneMarket