SR5719E

ELECTRIC COMPACT ROUGH TERRAIN TELEHANDLER



- Zero emission electric compact rough terrain telehandler with lithium-ion batteries
- Full-time 4-wheel drive
- Fully enclosed cab
- Power assisted steering
- Proportional joystick
- Simple to operate & maintain



ELECTRIC COMPACT ROUGH TERRAIN TELEHANDLER

SR5719E

CAPABILITIES	SR5719E*
Max. lift capacity	2,600kg
Max. lift height (A)	5.79m
Max. forward reach	3.1m


DIMENSIONS	
Overall width (B)	1.89m
Stowed height (C)	1.93m
Length to fork face (D)**	4.19m
Wheelbase	2.5m
Ground clearance	220mm


PERFORMANCE	
Max. drive speed	12km/h
Raise/lower time	6.9/5 sec
Hydraulic flow (per minute)	80L
Hydraulic pressure	230bar
Hydraulic oil capacity	70L
Outside turning radius	3.25m
Tires	12 x 16.5

POWER	
Power source	Lithium-ion 80V 32kWh batteries
Operating temperature	(-)20°C to (+)45°C
Charger	on-board, single phase

WEIGHT	
Weight	4,800kg

LOAD CHART

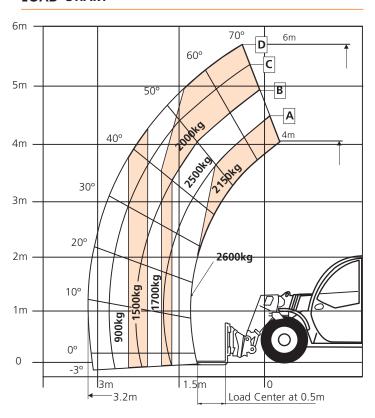



STANDARD FEATURES

- Lithium-ion batteries
- Easy access to components for servicing
- Full-time 4-wheel drive
- 4-wheel steer
- Selectable front, crab & coordinated steering modes
- Auxiliary hydraulic circuit on the boom
- Variable speed hydrostatic drive
- Fully enclosed cab with heat
- Proportional joystick
- Illuminated gauge and switch panels
- Color LCD display with machine & engine diagnostics
- Adjustable suspension seat
- LED road lights (2)
- LED work lights on boom (2)
- 2000 charging cycles/2 year *** lithium battery warranty
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Multiple options for carriages, tires and fork tines
- Cold weather synthetic oil
- Swivel hook
- Hydraulic tank heater
- Universal skidsteer attachment
- External three-phase fast charger



P.O. Box 1160 St.Joseph, MO 64502-1160, USA

Tel: 1 (785) 989-3000

Toll-free: 1 (800) 255-0317 Fax: 1 (785) 989-3070

Email: sales.usa@snorkellifts.com

ANSI Specification © Snorkel 2021

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

**Whichever comes first. Refer to Snorkel warranty policy for full details, limitations and restrictions. Batteries at the end of their life to be returned to Snorkel for recycling. **Length to fork face = length from carriage to counter weight.

* Preliminary specifications - confirm at time of ordering

02/2021