


БАШЕННЫЙ КРАН С ПОДЪЕМНОЙ СТРЕЛОЙ



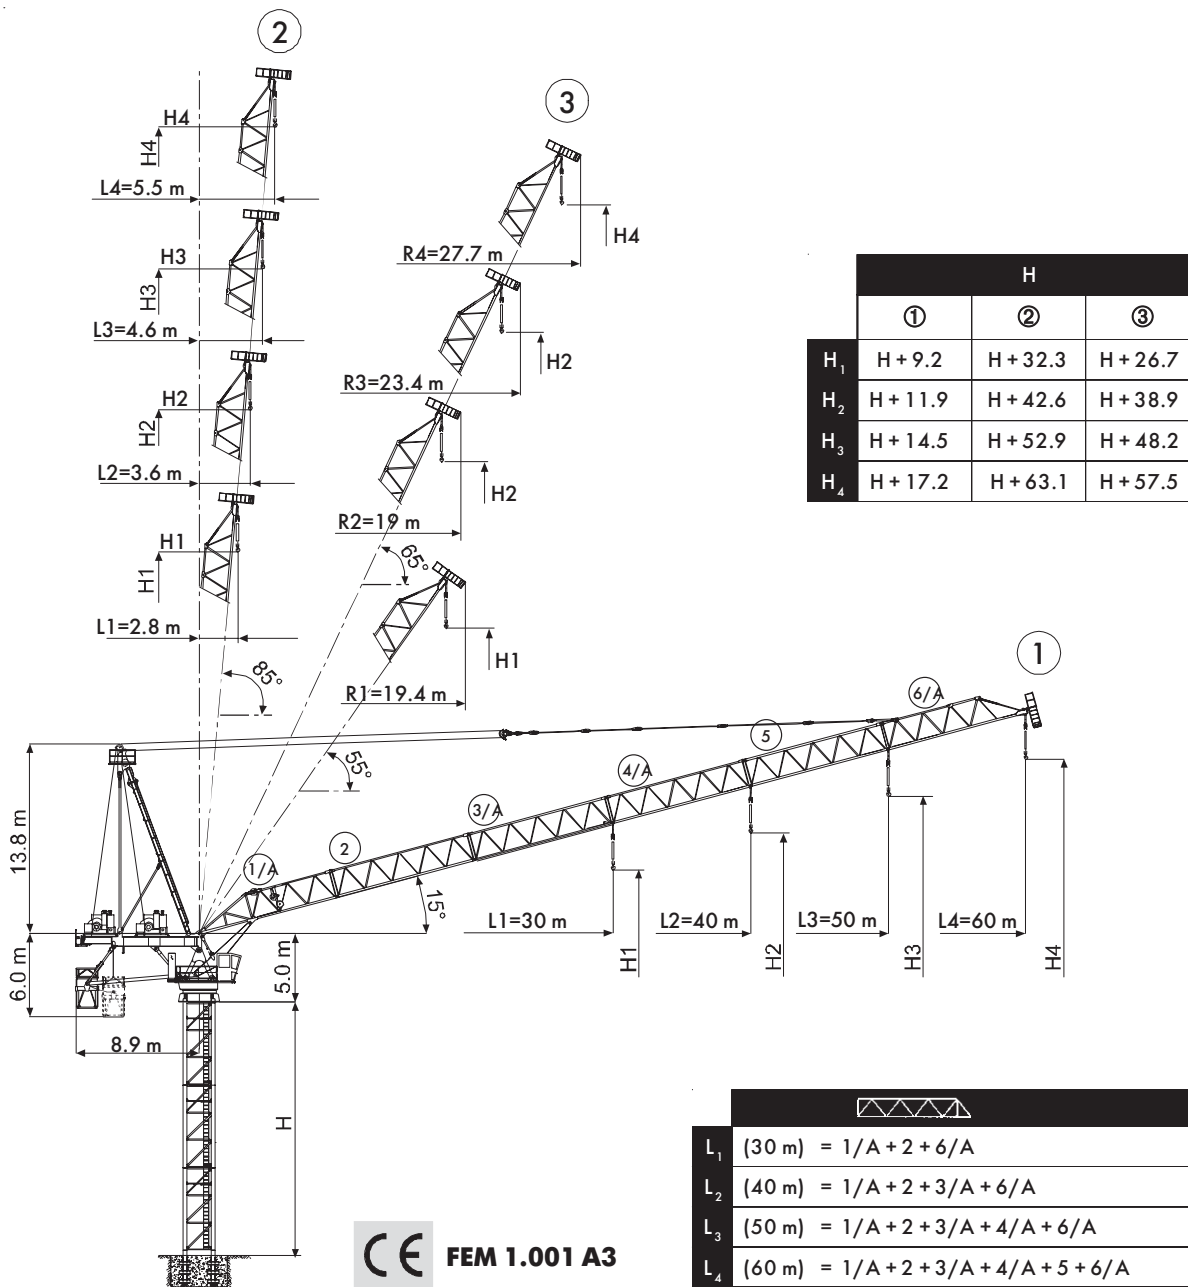


CTL 630 -32 HD23


Характеристики и данные не окончательные
Возможно изменение без предварительного уведомления

Картограмма нагрузки

CTL 630-32


			20	22	25	27	30	35	40	45	50	55	60
													
16T	-	35 м	16.00	16.00	16.00	16.00	16.00	16.00	13.90	12.27	10.96	9.89	9.00
16T	-	41.9 м	16.00	16.00	16.00	16.00	16.00	16.00	16.00	14.82	13.20		
32T	-	21.8 м	32.00	31.78	27.80	25.64	22.93	19.46	16.85	14.82	13.20		
16T	-	40 м	16.00	16.00	16.00	16.00	16.00	16.00	16.00				
32T	-	22.6 м	32.00	32.00	28.84	26.60	23.80	20.20	17.50				
16T	-	30 м	16.00	16.00	16.00	16.00	16.00						
32T	-	22.8 м	32.00	32.00	29.08	26.82	24.00						

Другие конфигурации

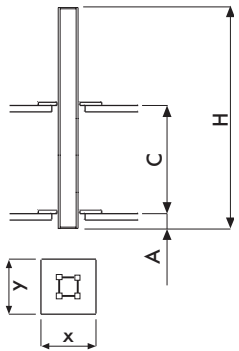

i
Телескопический кран

HD 23 26/A	
[m]	
A _{min}	i
C _{min}	
H _{max}	
x	
y	

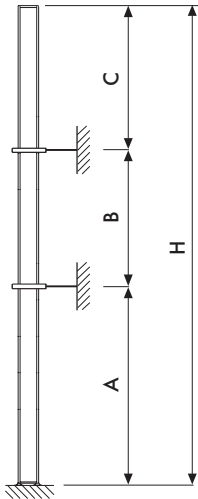


i
Кран, прикрепленный к объекту


		HD23 R1		HD23 R2	
		[m]		[m]	
		L ₃₋₄	L ₁₋₂	L ₃₋₄	L ₁₋₂
A _{min/max}		30/30		30/54	30/60
B _{min/max}		24/30		24-30	24/36
C _{max}		24-(30 <i>i</i>)	30-(36 <i>i</i>)	24-(30 <i>i</i>)	30-(36 <i>i</i>)
H _{max}		i			

Башня


HD23

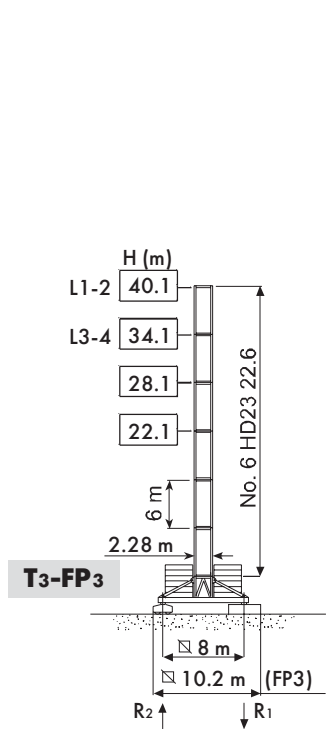


R1	1600 kN ●	1300 kN ◆
R2		
	140 t	

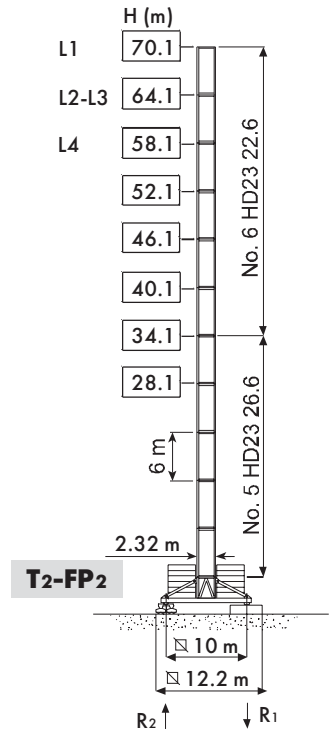


R1	1900 kN ●	1800 kN ◆
R2		
	180 t	

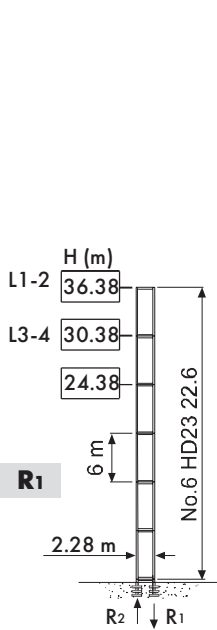

R1	3600 kN ●	3200 kN ◆
R2	2560 kN ●	2350 kN ◆
	116 t	

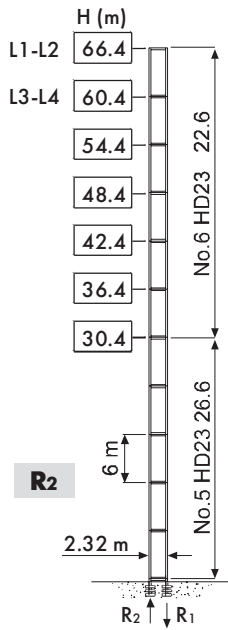



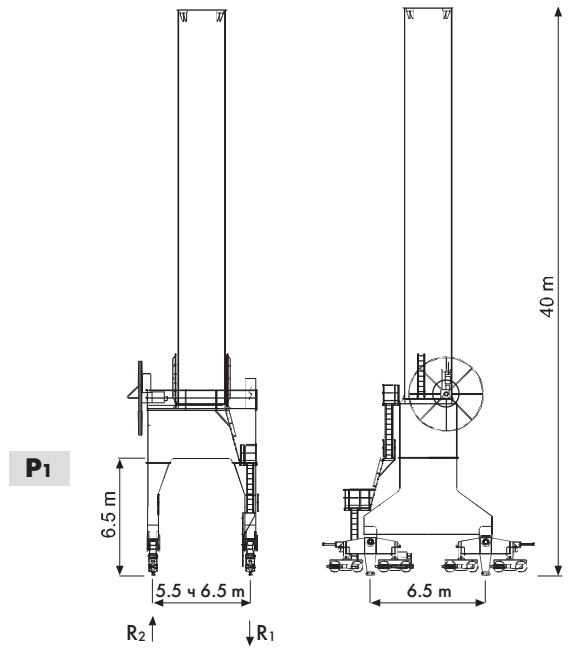

R1	4550 kN ●	5580 kN ◆
R2	3350 kN ●	4600 kN ◆
	148 t	
















R1		
R2		
	250 t	

Механизмы









			
	SRWB 102 160/5	301 кВА*	400 В – 50 Гц
	SRWB 122 160/5	325 кВА*	460 В – 60 Гц
	110 AWL 160	297 кВА*	400 В – 50 Гц / 460 В – 60 Гц
			2000/14/CE

* Кран без оборудования для перевозки

		м/мин	т	кВт		
	SRWB 102 160/5 50 Hz		0 ⇨ 32	16	102	600 m
			0 ⇨ 50	10		
			0 ⇨ 80	6		
			0 ⇨ 125	3.5		
		0 ⇨ 16	32			
		0 ⇨ 25	20			
		0 ⇨ 40	12			
		0 ⇨ 63	7			
SRWB 122 160/5 60 Hz		0 ⇨ 38	16	112	600 m	
		0 ⇨ 60	10			
		0 ⇨ 96	6			
		0 ⇨ 150	3.5			
		0 ⇨ 19	32			
		0 ⇨ 30	20			
		0 ⇨ 48	12			
		0 ⇨ 76	7			
110 AWL 160 LLC D1		0 ⇨ 26	16	110	340 m	
		0 ⇨ 36	11.3			
		0 ⇨ 50	8.1			
		0 ⇨ 69	5.6			
		0 ⇨ 80	0.8			
		0 ⇨ 13	32			
		0 ⇨ 18	22.6			
		0 ⇨ 25	16.2			
		0 ⇨ 35	11.2			
		0 ⇨ 40	1.6			

	LWL 11000	2.8 мин	110 кВт
	SCC 2 2 132 L	0 ⇨ 0.65 об/мин	2 x 14 кВт
	TVF 2RT 4M11	0 ⇨ 24 м/мин	4 x 11 кВт
	TSR 2 RG 4 M 8	12 ⇨ 24 об/мин	4 x 80 Нм
	TVF 4RT 8M11	0 ⇨ 24 м/мин	8 x 11 кВт
			

	●	▲	■
	Максимальная Н [м]		
T ₃	28.1	40.1	40.1
T ₂	40.1	70.1	70.1
P ₁	-	40	40

-  Подъем
-  Перемещение
-  Поворот
-  Передвижение
-  Указания по уровню шума
-  Проконсультируйтесь с нами
-  Потребляемая мощность
-  Источник питания

Gru Comedil s.r.l.

A Terex Company



Divisione Automontanti

Via S. Egidio 42/A, 33074 Fontanafredda (PN) - Italy
Tel. (+39) 0434 567 311 - Telefax (+39) 0434 998631

Via Alessandrina, 25 - 20095 Cusano Milanino (MI) - Italy
Tel. (+39) 02 613 16011 - Telefax (+39) 02 613 16034

Internet e-mail: info@comedil.com
Internet home page: www.comedil.com

Internet e-mail: info.CBR@comedil.com