


UpRight

UL

PORTABLE PERSONNEL LIFTS

The quick, safe way to work at height in:

- industrial plants
- construction sites
- schools, universities
- municipalities
- hospitals, museums
- office buildings
- convention centres
- sports clubs
- malls, retail stores
- theatres, stadiums
- airports, hotels
- warehouses

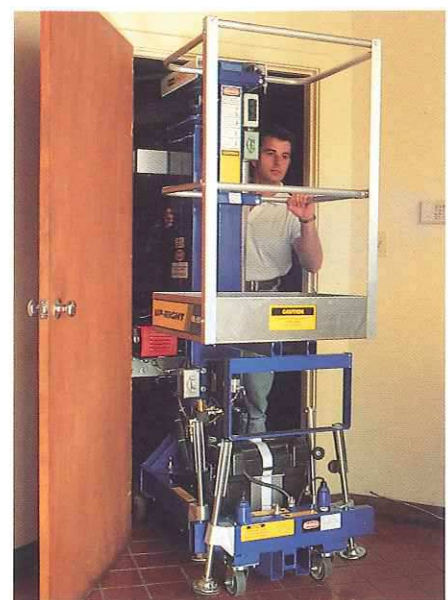


Specifications	UL-20/26	UL-24/30	UL-31/37	UL-33/39	UL-38/44	UL-40/46
(A) Working Height	7.77 m (25.5 ft.)	9.14 m (30 ft.)	11.27 m (37 ft.)	11.74 m (38.5 ft.)	13.41 m (44 ft.)	13.87 m (45.5 ft.)
(B) Platform Height (maximum)	5.94 m (19.5 ft.)	7.31 m (24 ft.)	9.44 m (31 ft.)	9.91 m (32.5 ft.)	11.58 m (38 ft.)	12.04 m (39.5 ft.)
Platform Capacity	136 kg (300 lbs.)	136 kg (300 lbs.)	136 kg (300 lbs.)	136 kg (300 lbs.)	136 kg (300 lbs.)	136 kg (300 lbs.)
Stored Dimensions						
(C) Vertical height	2.01 m (79 in.)	2.02 m (79.5 in.)	2.49 m (98 in.)	2.49 m (98 in.)	2.92 m (115 in.)	2.92 m (115 in.)
(D) Width	740 mm (29 in.)	740 mm (29 in.)	740 mm (29 in.)	740 mm (29 in.)	740 mm (29 in.)	740 mm (29 in.)
(E) Depth	1.14 m (45 in.)	1.14 m (45 in.)	1.14 m (45 in.)	1.14 m (45 in.)	1.14 m (45 in.)	1.14 m (45 in.)
(F) Horizontal Length	2.01 m (79 in.)	2.02 m (79.5 in.)	2.49 m (98 in.)	2.49 m (98 in.)	2.92 m (115 in.)	2.92 m (115 in.)
(G) Diagonal storage height	1.85 m (73.3 in.)*	1.84 m (72.6 in.)*	1.87 m (74 in.)	2.02 m (79.5 in.)**	2.01 m (79.5 in.)	2.19 m (86.5 in.)**
(H) Diagonal storage length	2.21 m (87 in.)	2.21 m (87 in.)	2.72 m (107 in.)	2.72 m (107.5 in.)	3.09 m (122 in.)	3.09 m (122 in.)
Base Dimensions with outriggers extended						
(I) Side to side	1.40 m (55 in.)	2.43 m (95.5 in.)	3.35 m (132 in.)	3.35 m (132 in.)	3.35 m (132 in.)	3.35 m (132 in.)
(J) Front to back	1.32 m (52 in.)	2.79 m (110 in.)	3.71 m (146 in.)	3.71 m (146 in.)	3.71 m (146 in.)	3.71 m (146 in.)
Weight Add'l weight for D.C. option	304 kg (670 lbs.) 24 kg (53 lbs.)	304 kg (670 lbs.) 24 kg (53 lbs.)	370 kg (815 lbs.) 24 kg (53 lbs.)	370 kg (815 lbs.) 24 kg (53 lbs.)	401 kg (885 lbs.) 24 kg (53 lbs.)	401 kg (885 lbs.) 24 kg (53 lbs.)
Safety Railing Height	1.07 m (42 in.)	1.07 m (42 in.)	1.07 m (42 in.)	1.07 m (42 in.)	1.07 m (42 in.)	1.07 m (42 in.)
Toe Board Height	150 mm (6 in.)	150 mm (6 in.)	150 mm (6 in.)	150 mm (6 in.)	150 mm (6 in.)	150 mm (6 in.)
Power Source	AC electric motor/110 Volts, 60 Hz or 220 Volts, 50 Hz D.C. Electric Motor with 1-12 Volt Battery, Grp. 27, 105 Amp/Hours					
Battery Charger	Automatic, 110 Volts, 60 Hz or 220 Volts, 50 Hz					
Auditorium Kit	Not available	Kit use dual-winch straddle lifting system requiring four outriggers. Shipping Wt.: 193 kg (425 lbs.) Straddle dimensions: H 1.22 x L 2.79-3.25 m (48" x 110"-128"); Storage 2.23 x 1.07 x .76m (88" x 42" x 30")				

† 559mm (22in.) with outriggers removed. *With optional tilt back mechanism. ** This model is available with optional detachable cage allowing passage through standard doorway.

OPTIONAL FEATURES

- Detachable Cage (67.94 cm/26.75 in)
- Narrow Cage (55.88 cm/22 in)
- Fibreglass Cage (top 71.80 cm/28.87 in)
(bottom 55.88 cm/22 in)
- Tool tray
- Fluorescent Tube Caddy
- AC Power (110V/60Hz or 220V/50Hz)

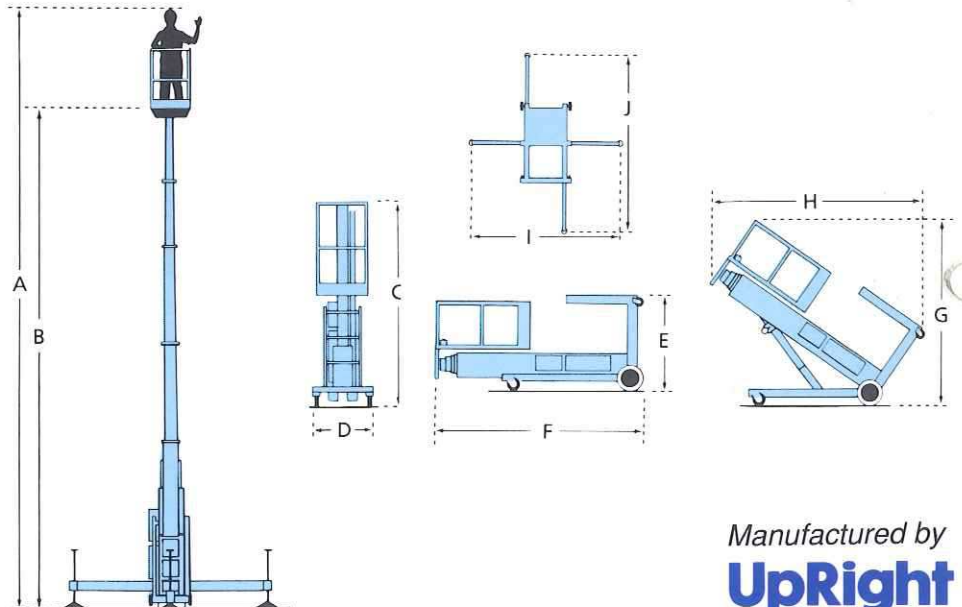

Manufactured by
UpRight

UpRight

EUROPE (353) 1 - 2853333

Pottery Road, Dun Laoire, Ireland.

USA (800) 926-5438

1775 Park St., Selma, CA 93662.

18202/EUR/7-94

18203/7-94

Courtesy of Crane.Market