


# XR1245 LOAD CHART OUTRIGGERS DOWN - FIXED CARRIAGE

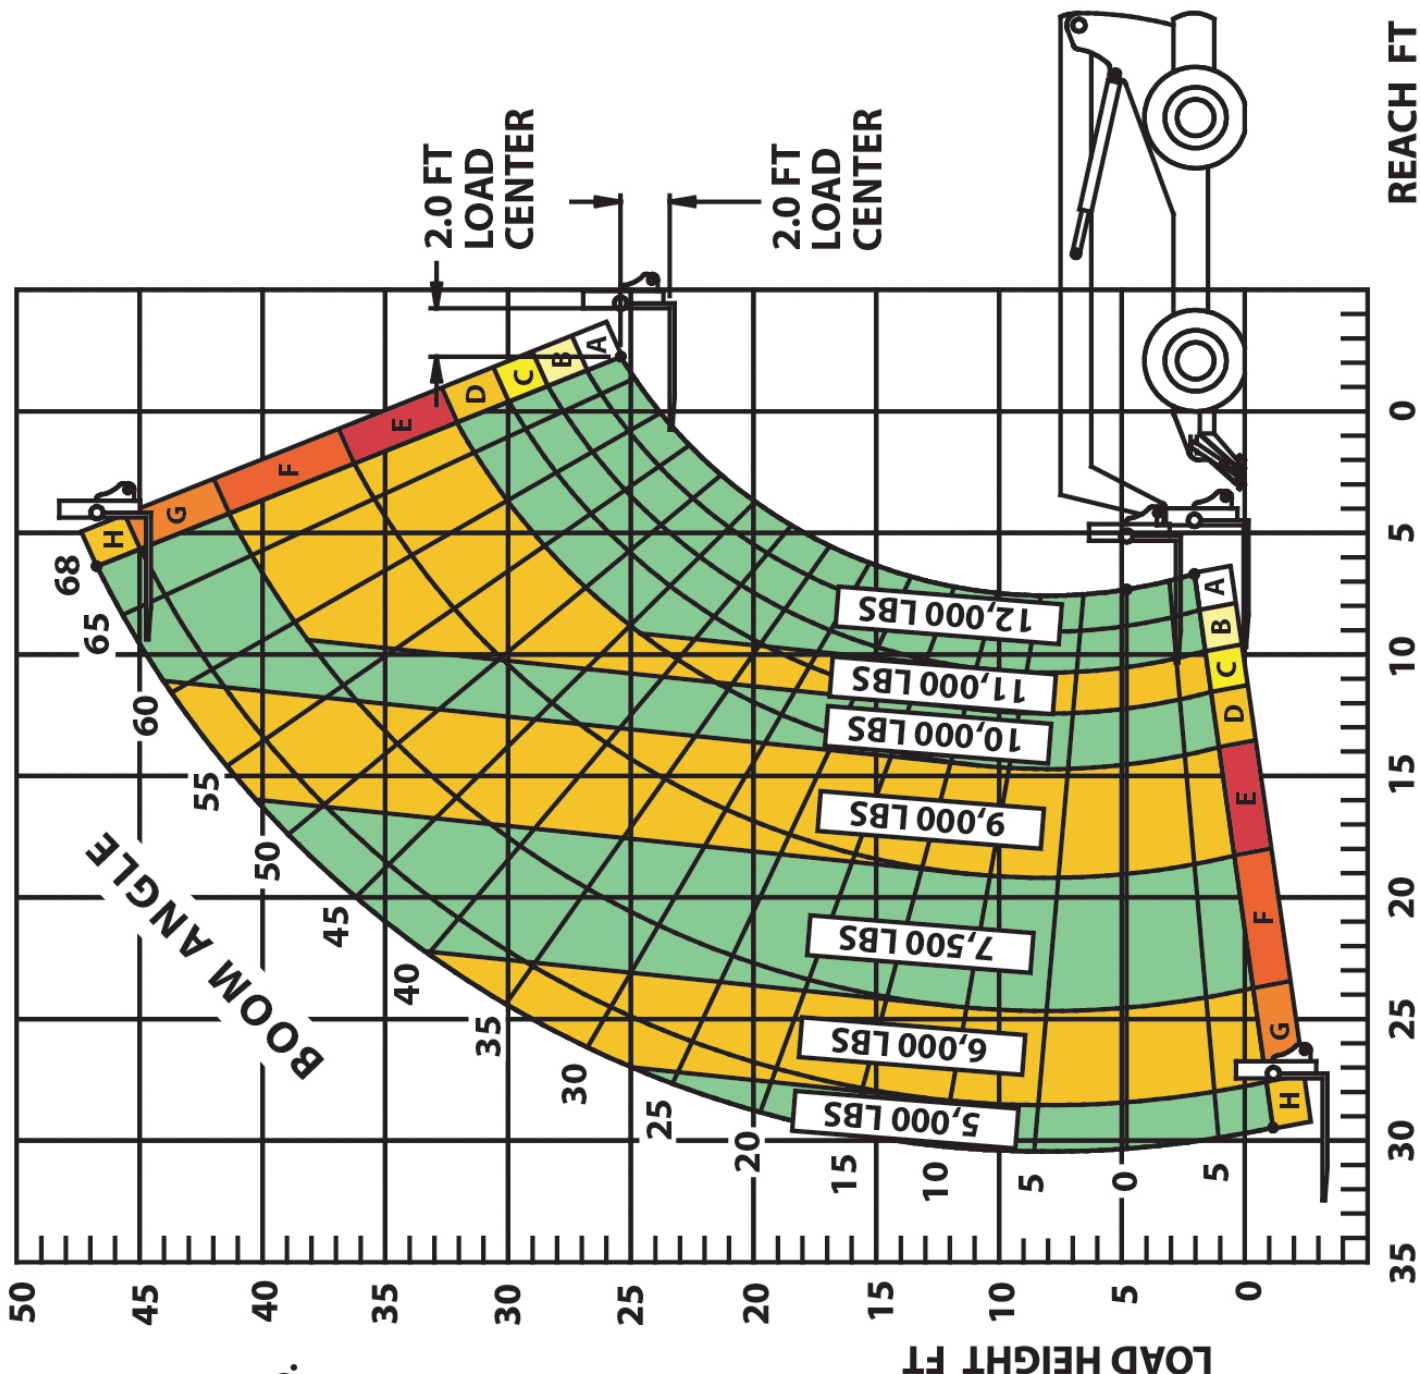

THE REAR AXLE MUST BE LOCKED AND THE OUTRIGGERS FIRMLY AGAINST THE GROUND.

LOAD RATINGS SHOWN ARE FOR VEHICLES EQUIPPED WITH FOAM FILLED TIRES ONLY.

LOAD RATING INCLUDES WEIGHT OF ANY RIGGING.

6,000 LBS AT 24 IN MIN CAPACITY FORK (12,000 LBS PAIR).



702-636-2969 • 800-497-1704

P/N 17030-000