


永茂建机
YONGMAO

ST80/116
64/50/40t

塔帽系列

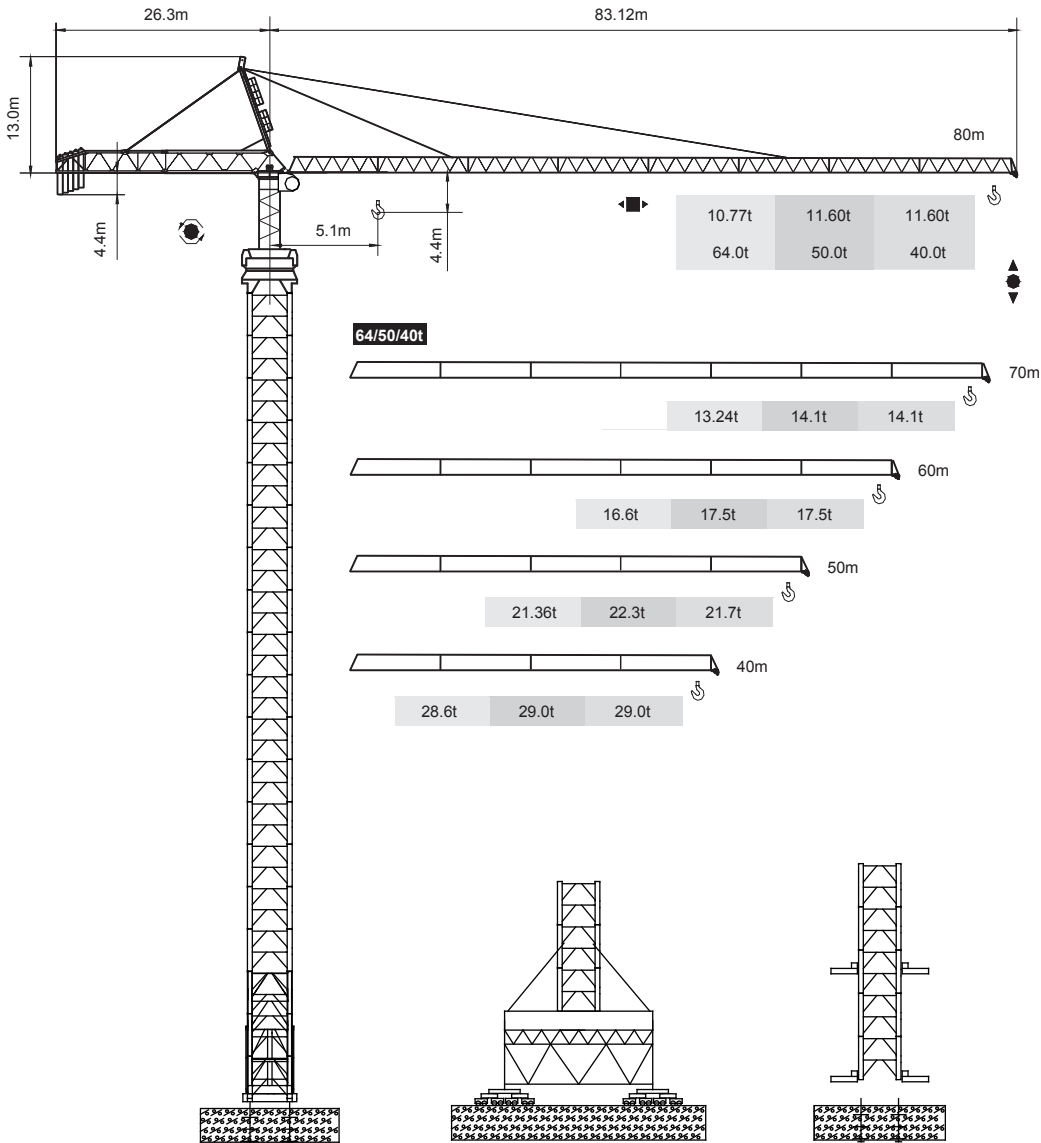

CE FEM

Topkit

V 5.0-09112014



YONGMAO HOLDINGS LIMITED


ST80/116
64/50/40t

載荷表 Load Chart

64t

STD-64-A(B)-1-V1.0


R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	35	40	45	50	55	60	65	70	75	80
80	UU	20.70	64	39.43	32.42	27.28	23.35	20.24	17.73	15.66	13.92	12.44	11.17	10.07
	UU	36.00	32	32.00	32.00	27.81	23.92	20.84	18.36	16.30	14.58	13.12	11.86	10.77
70	UU	20.72	64	39.59	32.57	27.41	23.47	20.36	17.84	15.76	14.02	12.54		
	UU	36.12	32	32.00	32.00	27.98	24.07	20.99	18.49	16.43	14.71	13.24		
60	UU	20.73	64	40.03	32.95	27.75	23.77	20.63	18.09	16.00				
	UU	36.29	32	32.00	32.00	28.21	24.28	21.18	18.67	16.60				
50	UU	20.75	64	40.21	33.11	27.89	23.91	20.76						
	UU	36.46	32	32.00	32.00	28.43	24.48	21.36						
40	UU	20.77	64	40.28	33.17	28.00								
	UU	36.58	32	32.00	32.00	28.60								



50t

STD-50-A(B)-1-V1.0

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	35	40	45	50	55	60	65	70	75	80
80	UU	25.70	50.0	41.11	33.93	28.66	24.63	21.44	18.87	16.74	14.96	13.44	12.13	11.00
	UU	45.37	25.0	25.00	25.00	25.00	25.00	21.95	19.39	17.29	15.52	14.02	12.72	11.60
70	UU	25.72	50.0	41.19	34.01	28.73	24.70	21.51	18.93	16.80	15.02	13.50		
	UU	45.45	25.0	25.00	25.00	25.00	25.00	22.04	19.49	17.38	15.61	14.10		
60	UU	25.77	50.0	41.35	34.14	28.86	24.81	21.62	19.03	16.90				
	UU	45.60	25.0	25.00	25.00	25.00	25.00	22.18	19.62	17.50				
50	UU	25.80	50.0	41.46	34.24	28.95	24.90	21.70						
	UU	45.71	25.0	25.00	25.00	25.00	25.00	22.30						
40	UU	25.80	50.0	41.46	34.25	29.00								
	UU	40.00	25.0	25.00	25.00	25.00								

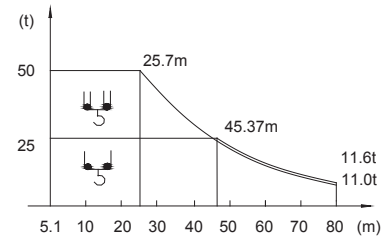

Topkit ST80/116



YONGMAO HOLDINGS LIMITED

0834



Topkit ST80/116

Topkit ST80/116

ST80/116
64/50/40t

40t

STD-40-A(B)-1-V1.0														
R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	35	40	45	50	55	60	65	70	75	80
80	UU	30.81	40.00	40.00	33.93	28.66	24.63	21.44	18.87	16.74	14.96	13.44	12.13	11.00
	U	53.96	20.00	20.00	20.00	20.00	20.00	20.00	19.39	17.29	15.52	14.02	12.72	11.60
70	UU	30.83	40.00	40.00	34.01	28.73	24.70	21.51	18.93	16.80	15.02	13.50		
	U	54.07	20.00	20.00	20.00	20.00	20.00	20.00	19.49	17.38	15.61	14.10		
60	UU	30.90	40.00	40.00	34.14	28.86	24.81	21.62	19.03	16.90				
	U	54.24	20.00	20.00	20.00	20.00	20.00	20.00	19.62	17.50				
50	UU	30.94	40.00	40.00	34.24	28.95	24.90	21.70						
	U	50.00	20.00	20.00	20.00	20.00	20.00	20.00						
40	UU	30.94	40.00	40.00	34.25	29.00								
	U	40.00	20.00	20.00	20.00	20.00								

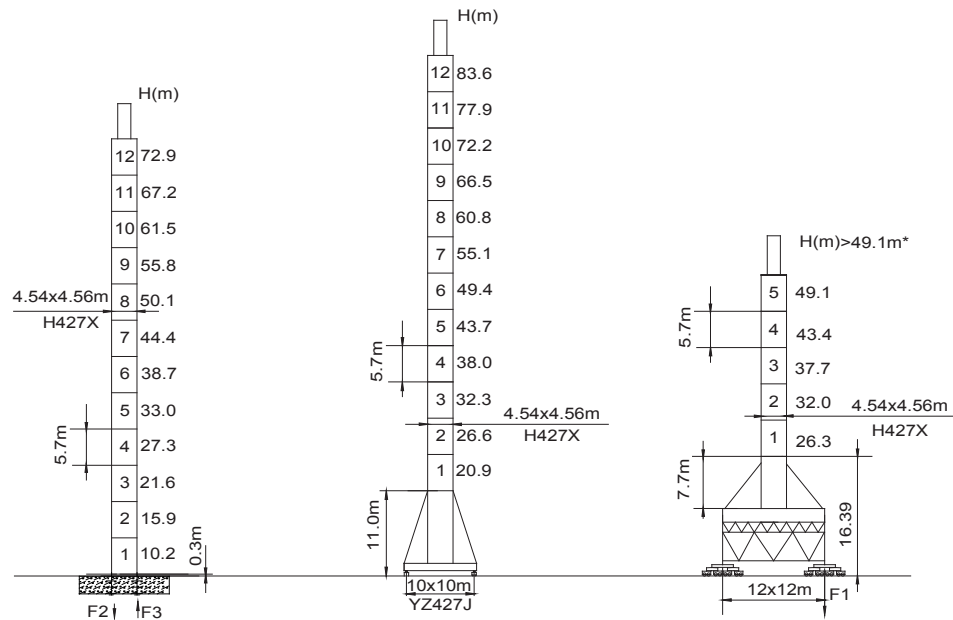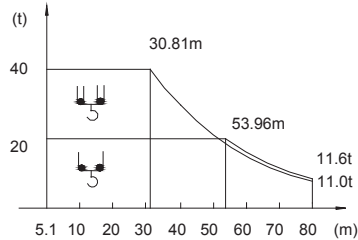

	●	■
F2	426t	480t
F3	201t	227t
	382t	

	●	■
F1	305t	320t
	500t	

- 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
- ⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topkit ST80/116


塔帽系列




Topkit ST80/116

Topkit ST80/116

ST80/116
64/50/40t

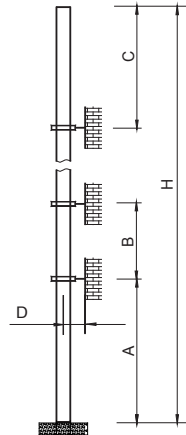

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
H427X	53.7	34.2	45.5	>5.6	340 >340*

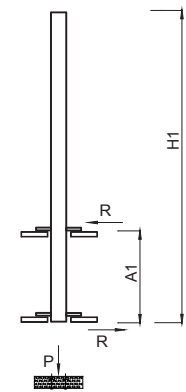

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
H427X	*	*	*	*	*	*	*	*

附著道數 Number of tie collars =(H-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

主要性能參數 Specifications

機構 Mechanism								電動機 Motor kW
			m/min	t	m/min	t		
	64t	200LFV160B	0—26	32.0	0—13	64.0	830m >830m *	200
			0—45	25.0	0—23	50.0		
			0—68	15.0	0—34	30.0		
	50t	160LFV125DB	0—32	25.0	0—16	50.0	900m >900m *	160
			0—38	20.0	0—19	40.0		
			0—64	8.0	0—32	16.0		
40t	110LFV100DB	0—20	20.0	0—10	40.0	900m >900m *	110	
		0—60	5.0	0—30	10.0			
		0—80	2.0	0—40	4.0			
	64t	24DFV33	0—25 m/min					24
	50t	18DFV25	0—32 m/min					18.5
	40t							
	11RFCV		0—0.6 rpm					4x11
	RTV		0—15 m/min					8x7.5

供電容量 Power supply	kVA		
380V (± 10%) 50 Hz	200LFV160B : 290	160LFV125DB : 240	110LFV100DB : 175

* 與製造商聯繫 Contact us, please.

★ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。

These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED