


永茂建机
YONGMAO

ST65/13
8t

塔帽系列

ST65/13
8t

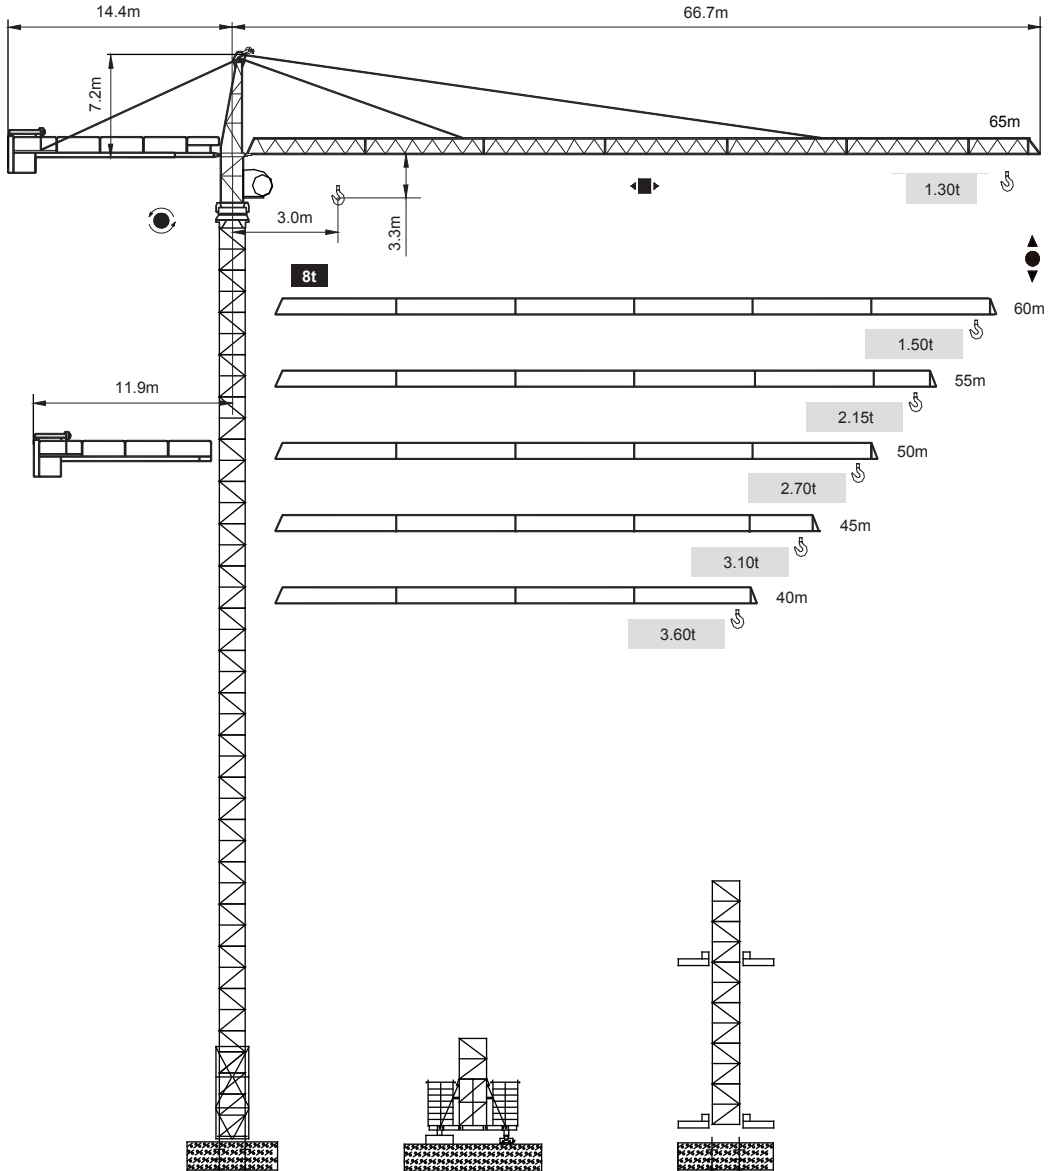


FEM

Topkit

V 5.0-11012016

載荷表 Load Chart

R	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	15	25	30	35	40	45	50	55	60	65
65	U	14.92	8.00	7.95	4.30	3.42	2.79	2.33	1.97	1.69	1.45	1.26	1.10
	U	27.62	4.00	4.00	4.00	3.62	3.00	2.53	2.17	1.89	1.66	1.46	1.30
60	U	15.17	8.00	8.00	4.39	3.49	2.86	2.39	2.02	1.73	1.49	1.30	
	U	28.09	4.00	4.00	4.00	3.70	3.06	2.59	2.22	1.93	1.70	1.50	
55	U	17.94	8.00	8.00	5.41	4.34	3.58	3.01	2.58	2.23	1.95		
	U	33.38	4.00	4.00	4.00	4.00	3.78	3.22	2.78	2.43	2.15		
50	U	19.43	8.00	8.00	5.95	4.79	3.96	3.35	2.87	2.50			
	U	36.22	4.00	4.00	4.00	4.00	4.00	3.55	3.08	2.70			
45	U	19.54	8.00	8.00	5.99	4.82	3.99	3.37	2.90				
	U	36.43	4.00	4.00	4.00	4.00	4.00	3.58	3.10				
40	U	19.64	8.00	8.00	6.03	4.85	4.02	3.40					
	U	36.62	4.00	4.00	4.00	4.00	4.00	3.60					

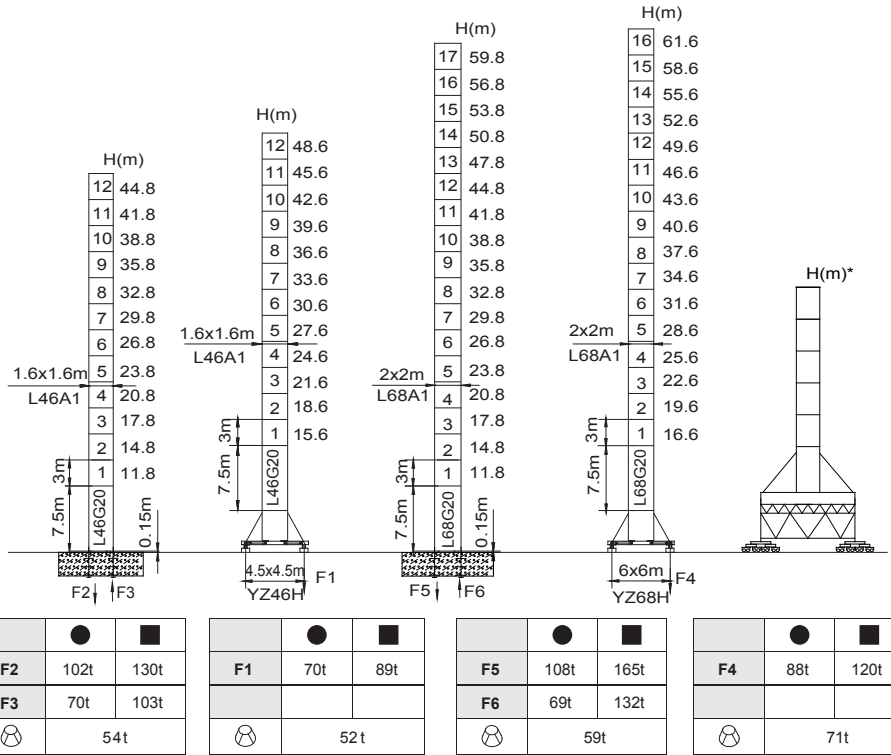

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊗ 整機自由高度重量(不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topkit ST65/13

Topkit ST65/13
Topkit ST65/13



YONGMAO HOLDINGS LIMITED





YONGMAO HOLDINGS LIMITED


ST65/13
8t

塔帽系列

ST65/13
8t

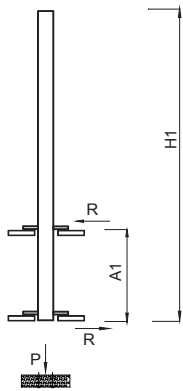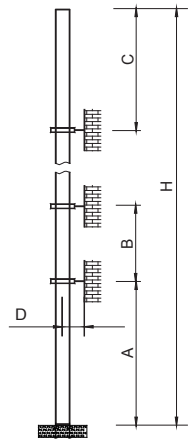

內爬框外廓尺寸
Overall dimensions of the internal climbing frame



內爬開口尺寸
Dimensions of the internal climbing opening

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
L68A1	45	36	44.8	>3.6	250 >250*
L46A1	33	24	32.8	>3.0	200 >200*

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
L68A1	54.6	16	75	18.1	2.58	2.17	2.78	3.29
L46A1	43.3	12-19	63.2	18.6	2.15	1.8	2.45	2.38

附著道數 Number of tie collars=(H-A-C)/B+1

超過100m高度，需降低載荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

主要性能參數 Specifications

機構 Mechanism							電動機 Motor kW
		m/min	t	m/min	t		
	30SWR20Z☆	0 – 40 0 – 80	4.0 2.5	0 – 20 0 – 40	8.0 4.0	360m >360m *	30/30
	24PQC20	0 – 6.5 0 – 30 0 – 60	4.0 4.0 2.0	0 – 3.2 0 – 15 0 – 30	8.0 8.0 4.0	340m >340m *	24/24/6
	30LFV20(B)	0 – 40 0 – 48 0 – 80	4.0 2.0 0.75	0 – 20 0 – 24 0 – 40	8.0 4.0 1.5	550m >550m *	30
	DTC95A	0 – 57 m/min				95 N ·m	
	YMD50☆	0 – 0.7 rpm				2x5	
	RTC190	0 – 0.7 rpm				2x95 N ·m	
	RT	12.5 – 25 m/min				4x2.6/5.2	

電壓 Pressure		kVA	
380V (±10%)	50Hz	24PQC20: 45	30SWR20Z , 30LFV20(B): 50

* 與製造商聯繫 Contact us, please.

☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。

These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

Topkit ST65/13

Topkit ST65/13



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED