


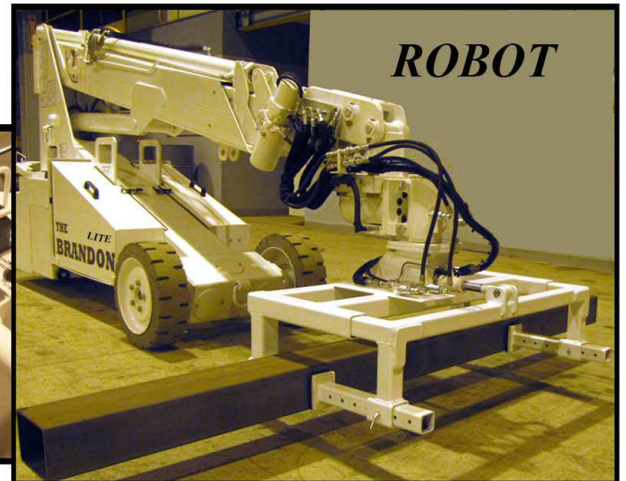
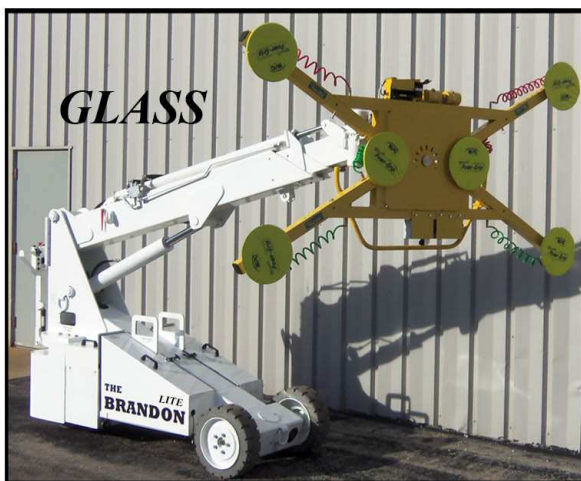


## ***THE BRANDON LITE***

*STANDARD TELEHANDLER OR CONFIGURE  
AS NEEDED FOR MULTI-USE LIFTING TOOL*

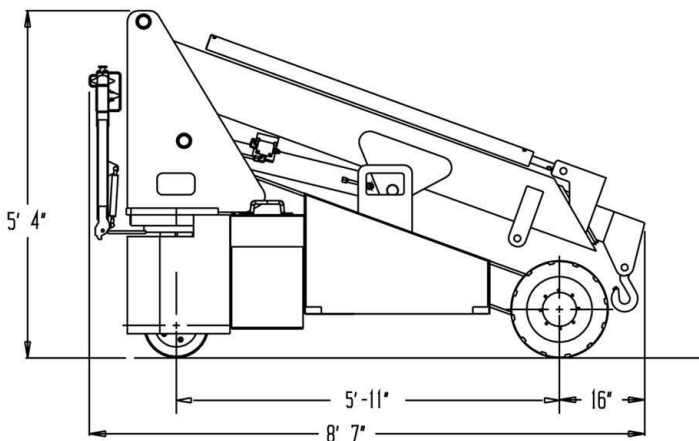

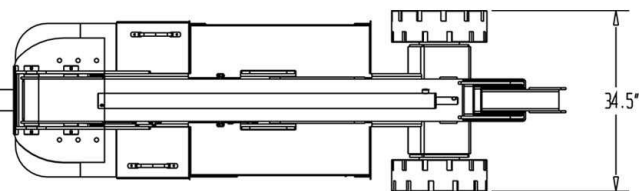

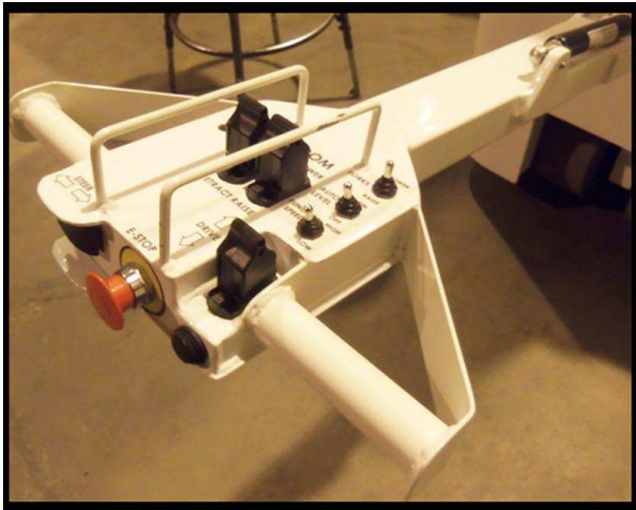

**Hoist Capacity:** 5000 lbs, 2267 kg

**Winch Capacity:** 2900 lbs, 1315 kg

**Glazier Capacity:** 1000 lbs.453 kg

**Jib Capacity:** 1000 lbs, 453 kg

**Fork Capacity:** 1950 lbs884 kg

**Reach:** Industry leading reach with below grade capability.

**Battery Power:** 24V 435Amp-Hour

**Electric Motor:** 6HP Fan Cooled DC

**Hydraulics:** Gear Pump with Load Sense Dump.

**Proportional Controls:** Electric Joystick for Proportional Lift and Extend. Includes 2-Speed HI/LOW switch for precise slow speed control.

**Boom:** Base unit and 2 hydraulically telescoping sections.

**Steering:** Rear Wheel Walkie Handle

**Drive:** Rear Wheel Hydraulic Drive with Joystick and Speed Dial to best provide inching control.

**Weight:** 4300 Lbs, 1950 kg

**Rated Load Limiter:** Displays rated load and actual load. Stops when rated load is reached. Detects which attachment is installed and automatically adjusts load parameters.

**Progressive Function Control:** Adjusts the maxim drive and lift speeds to limit unsafe operation based on the following:


- Steering Angle (Drive Slow with tight radius)
- Boom Height and Reach
- Lifted Load (Slow when closer to limit)

**Charger:** On-board 110V, 10AC Amps, 40DC Amps


**Removable Battery Box:** For multi-shift operation.




## HOIST LOAD CAPACITY CHART

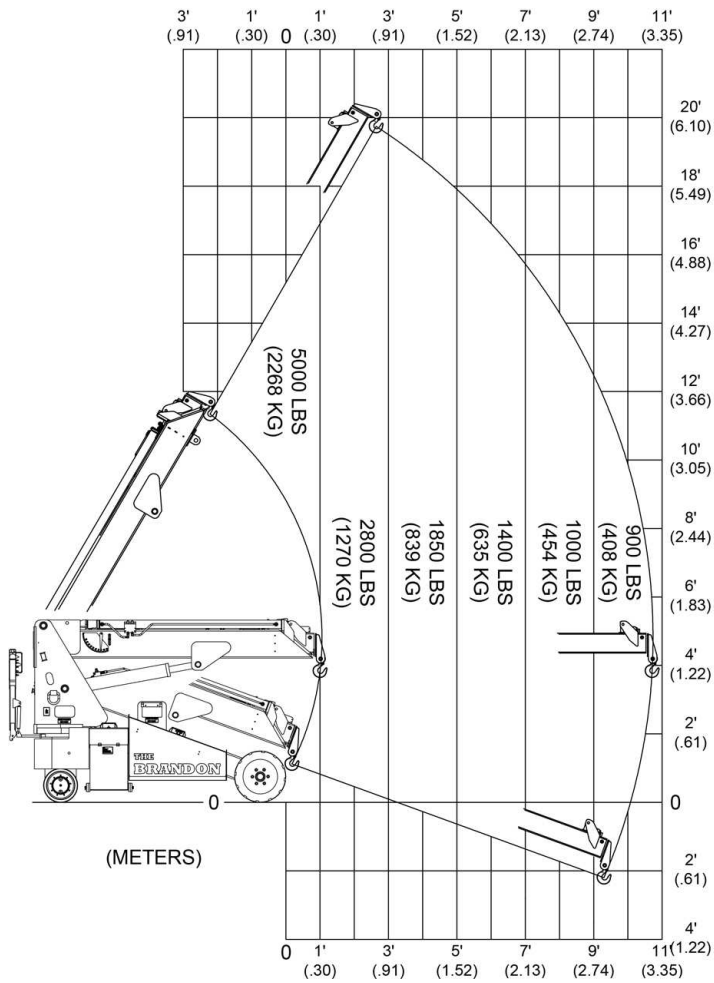

## WINCH LOAD CAPACITY CHART

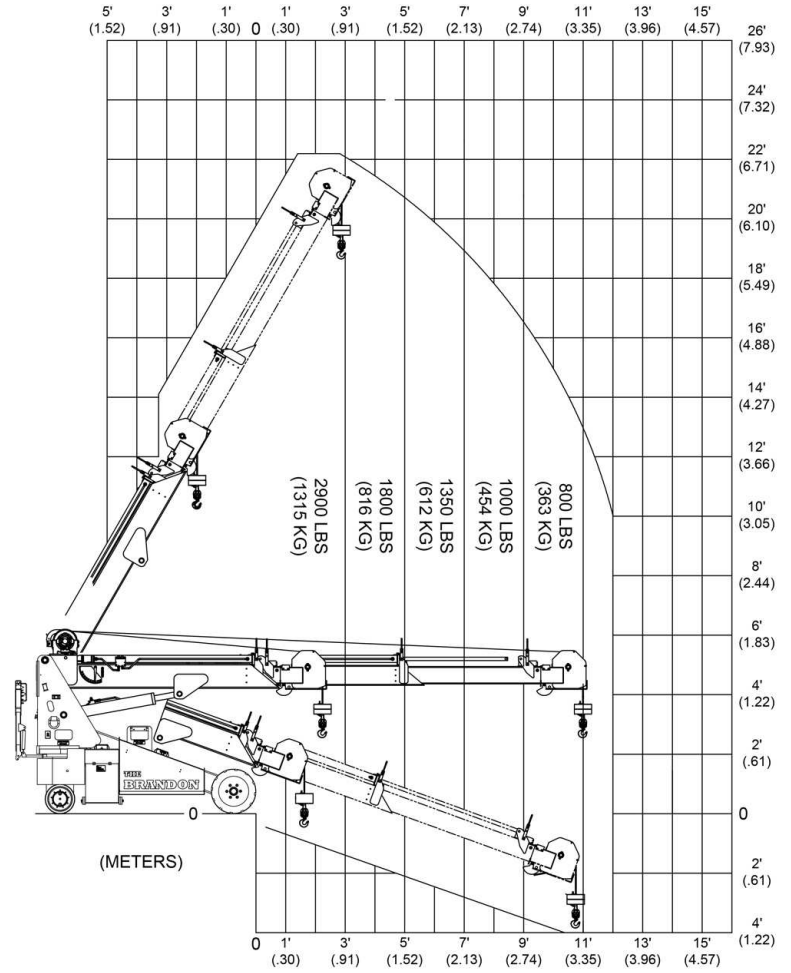


## GLASS LOAD CAPACITY CHART

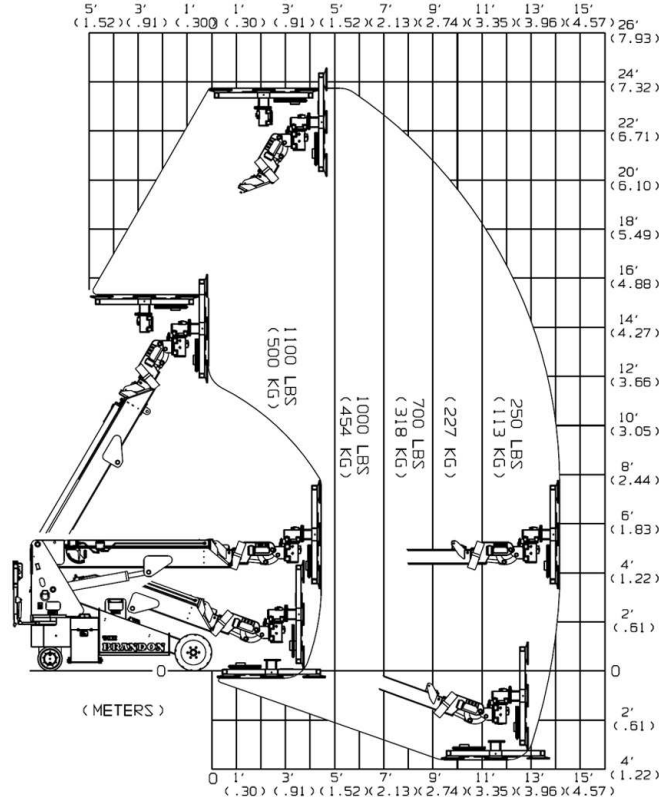




## FORK LOAD CAPACITY CHART

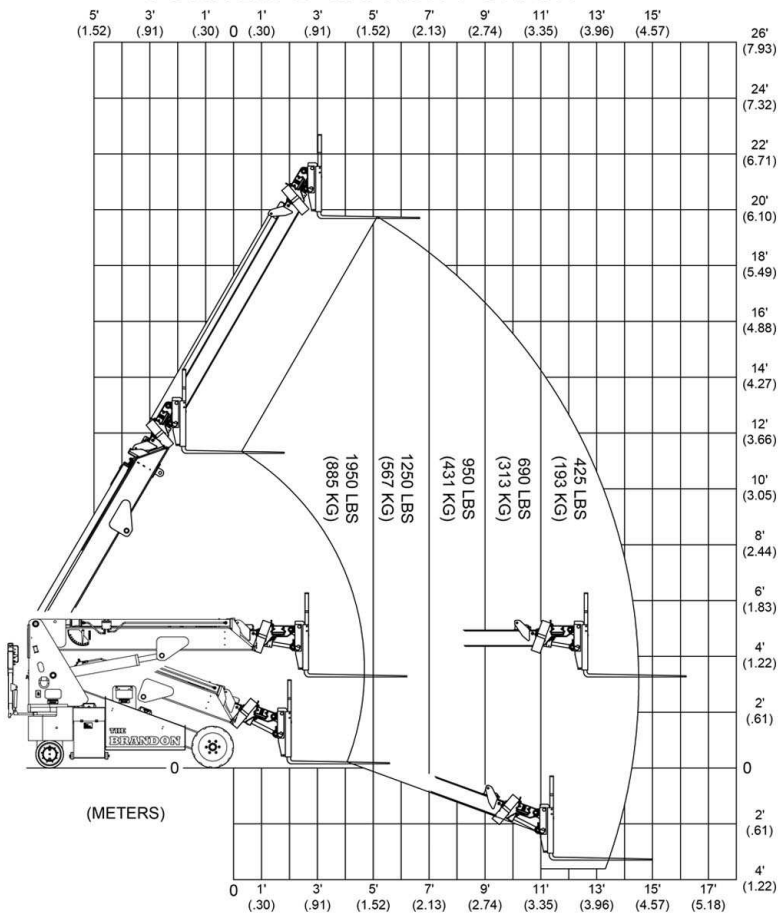

## JIB LOAD CAPACITY CHART

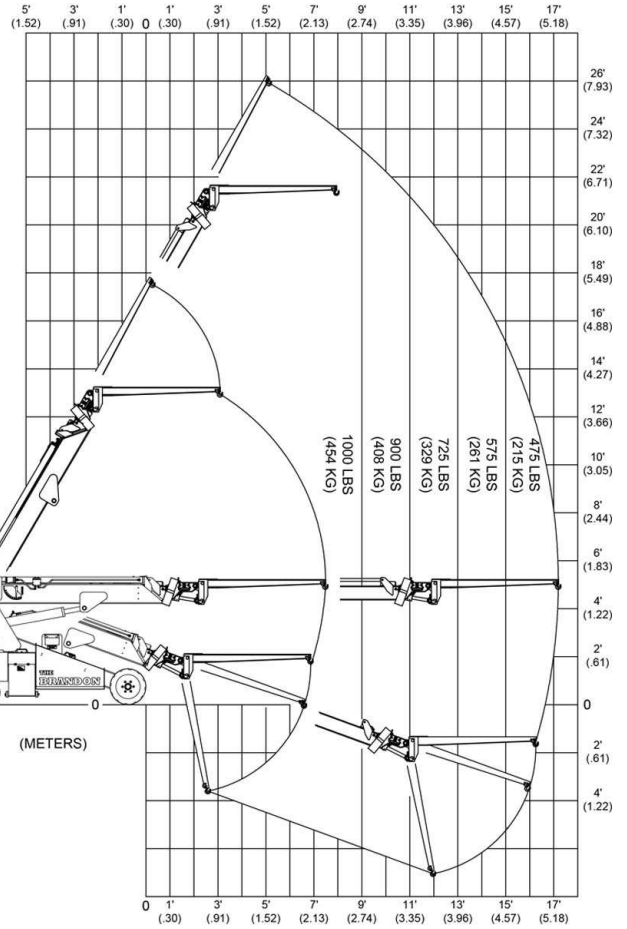

## ROBOT LOAD CAPACITY CHART

