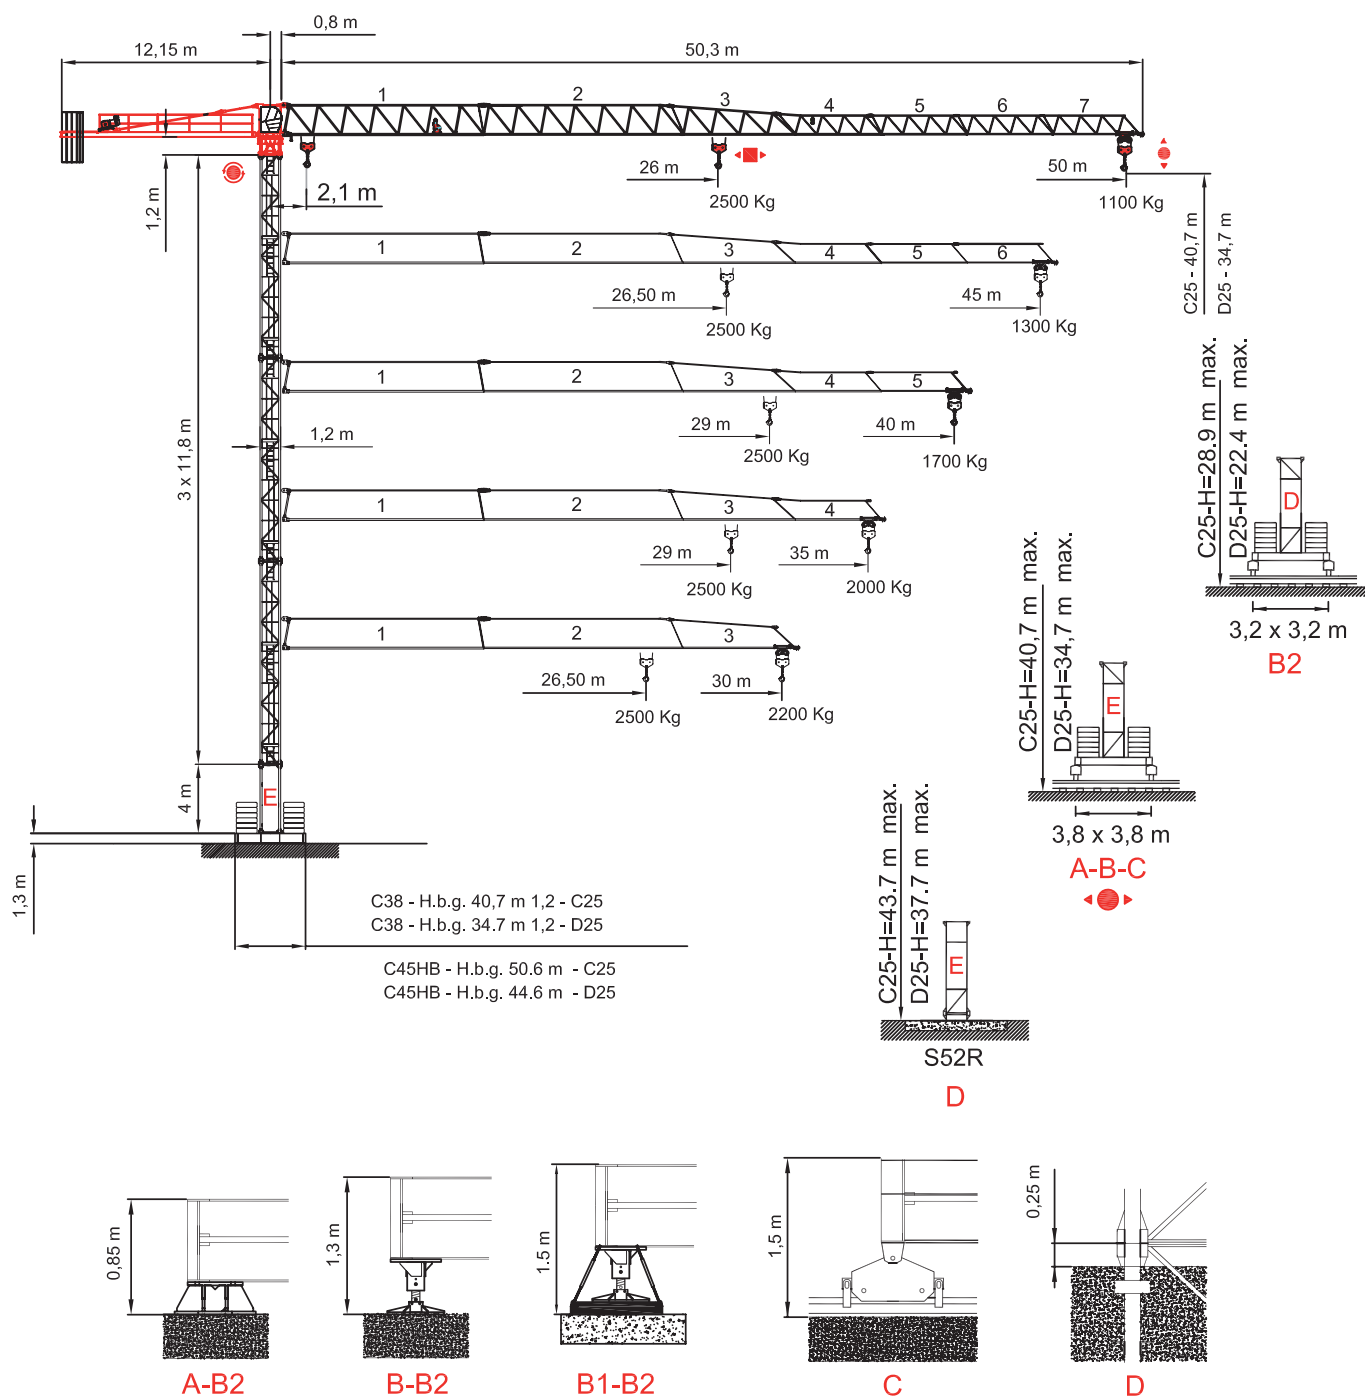




Curvas de cargas- Load diagrams- Lastkurven- Courbes de charges- Curve di carico
График грузоподъёмности

50 m 	18	20	24	25	26	28	30	33	35	37	39	40	43	45	48	50	m	
	2500	2500	2500	2500	2500	2383	2181	1929	1786	1660	1548	1496	1357	1275	1165	1100	Kg	
	9	13,60	15	15,5	18	21	24	27	30	33	35	38	40	43	45	48	50	
45 m 	18	20	24	25	26	26,5	28	30	33	35	37	39	40	43	45		m	
	2500	2500	2500	2500	2500	2500	2424	2220	1964	1819	1691	1577	1525	1383	1300		Kg	
	9	13,9	15	16,5	18	21	24	27	30	33	35	38	40	43	45		m	
40 m 	18	20	24	25	26	28	29	30	33	35	37	39	40				m	
	2500	2500	2500	2500	2500	2500	2500	2458	2179	2021	1881	1757	1700				Kg	
	9	12	15,2	18	18,5	21	24	27	30	33	35	38	40				m	
35 m 	18	20	24	25	26	28	29	30	33	35							m	
	2500	2500	2500	2500	2500	2500	2500	2433	2156	2000							Kg	
	9	12	15,3	18	18,5	21	24	27	30	33							m	
30 m 	18	20	24	25	26	26,9	28	30									m	
	2500	2500	2500	2500	2500	2500	2402	2200									Kg	
	9	14,2	15	17,5	18	21	24	27									m	

Bloque de contrapeso- Counterweight blocks- Gegengewichtsblöcke-
Bloc de contrepoid- Blocco di contrappeso - Плиты противовеса

	50 m		45 m			40 m		35 m		30 m	
	A	B	A	B	C	A	B	A	B	A	B
	3	2	3	1	1	3	1	2	2	2	1
	9700 Kg		9150 Kg			8300 Kg		7400 Kg		6000 Kg	

Mecanismos- Mechanisms- Antriebe- Mécanismes- Meccanismi - Приводы

(SF19)25 Hp (18,5 Kw) 3V
400V / 50HZ
H.B.G. 84 S/R Ø10mm

(SF19)25 Hp (18,5 Kw) 3V 400V / 50HZ H.B.G. 84 S/R Ø10mm								
	 240 m	m/min	8	31	62	4	16	31
		Kg	2500	2500	1250	5000	5000	2500
		Kw	18,5	18,5	18,5	18,5	18,5	18,5
	m/min	30 / 60				30 / 60		
	Kw	1,1 / 1,8				1,1 / 1,8		
	r.p.m	0,3	0,6	0,9	0,3	0,6	0,9	
	Nm	65				65		
	m/min	20				20		
	Kw	2 x 2,2				2 x 2,2		

* (SF24INV)33 Hp (24 Kw)
400V / 50HZ - 60HZ
H.B.G. 120 S/R Ø10mm

		m/min	40	60	80	20	30	40
		Kg	2500	2500	1250	5000	5000	2500
		Kw	24	24	24	24	24	24

		400 V 50 Hz	* 460 V 60 Hz	25 Hp (18,5 Kw) 31 Kw / 120 kVA 33 Hp (24Kw) INV 40 Kw / 160 kVA		25 m	50 m	100 m
2000/14/CEE 2005/88/CEE	2006/95 /CEE				25 Hp (18,5 KW) 3V	4 x 25 mm ²	4 x 25 mm ²	4 x 25 mm ²
					33 Hp (24 KW) INV	4 x 25 mm ²	4 x 25 mm ²	4 x 25 mm ²

* Opcional / Optional / Opzionale /


 Elevación / Hoisting / Heben / Levage / Sollevamento

 Distribución / Trolleying / Katzfahren / Distribution / Distribuzione

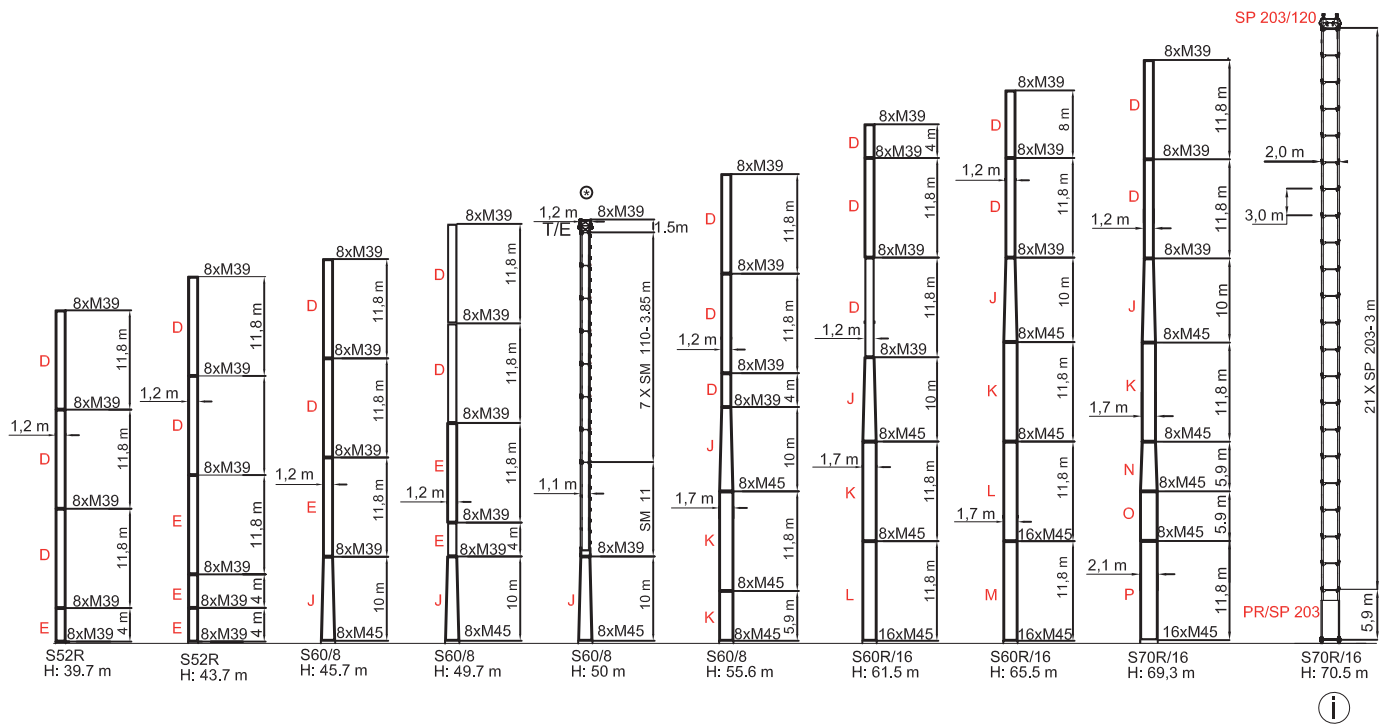
 Orientación / Slewing / Schwenken / Orientation / Rotazione

 Traslación / Travelling / Schienenfahren / Translation / Traslazione

**FEM 1005-C25-D25 / EN 14439- Mástil / Reacciones- Masts / Reactions- Maste / Eckdrücke-
Mat / Réactions- Torre / Réazioni / Реакции - Комплектация башни**



- D:** TORRE S/TL 52-50 1.20 M39/M39 8/8
E: TORRE TL 55 1.20 M39/M39 8/8
J: CAMPANA S17 10m 1.20/1.70 M39/M45 8/8
K: TORRE S17 1.70 M45 8/8
L: TORRE S17 1.70 M45 16/8
M: TORRE S17 1.70 M45 16/16

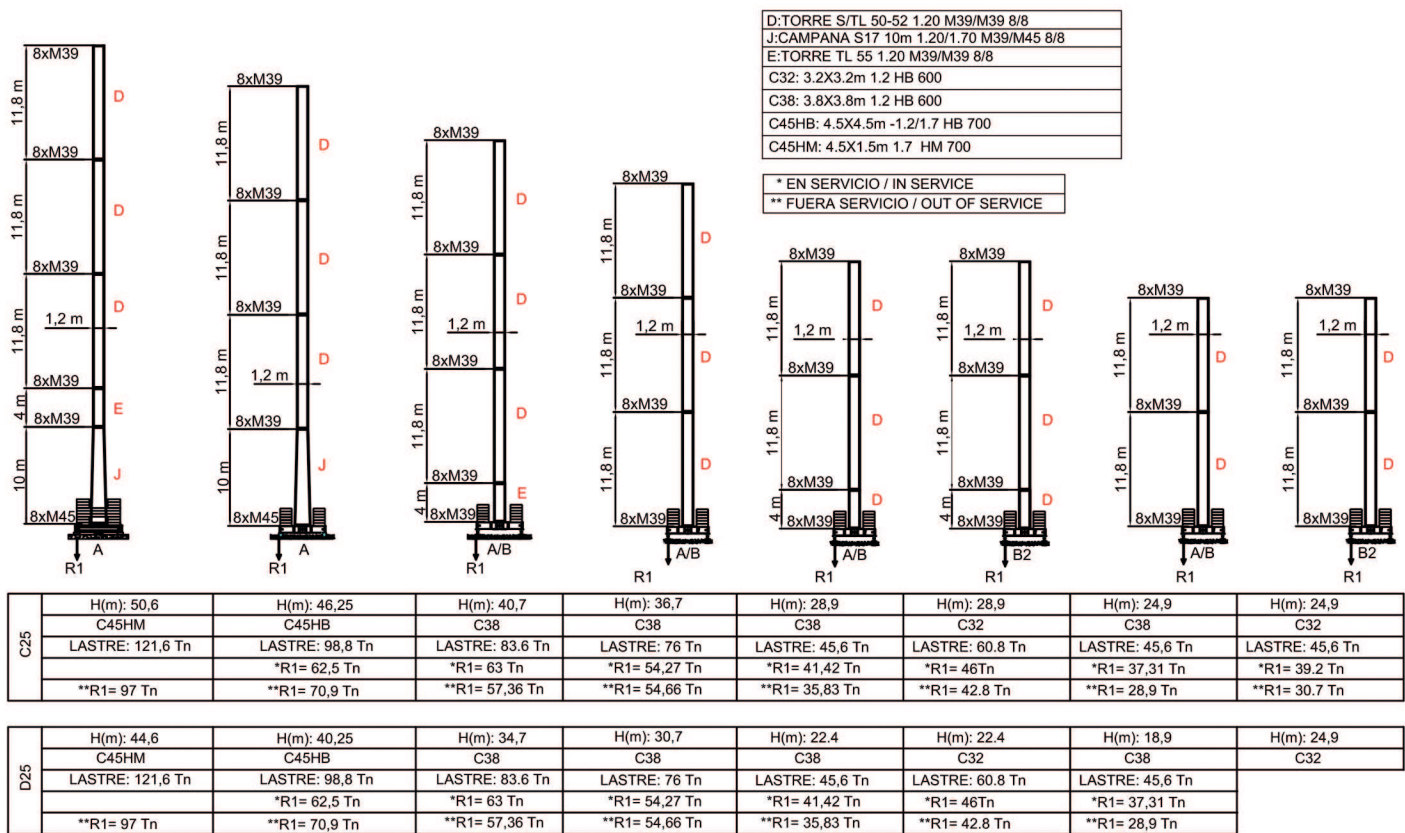


C25	H (m)	23.8	35.6	39.7	43.7	45.7	49.7	55.6	61.5	65.5	69.3
	M (T·m)	110	172.3	215.7	282	294	352.5	441.4	548.5	585	605
	T (t)	4.6	7.1	7.9	8.7	9.2	10.3	11.7	13.2	13.5	15
	P (t)	33.5	30.1	31.4	32.5	33.1	35.2	38.8	42.1	45.4	49
D25	H (m)	23.8	31.6	33.7	39.7	41.7	43.7	47.6	51.5	55.5	57.3
	M (T·m)	126.5	172.3	215.7	282	294	352.5	441.4	548.5	585	605
	T (t)	5.2	7.1	7.9	8.7	9.2	10.3	11.7	13.2	13.5	15
	P (t)	40.8	30.1	31.4	32.5	33.1	35.2	38.8	42.1	45.4	49



Consultarnos-Consultateci-Consult us-Nous consulter-Auf anfrage
 Другие высоты подъема и наращивание крана по запросу

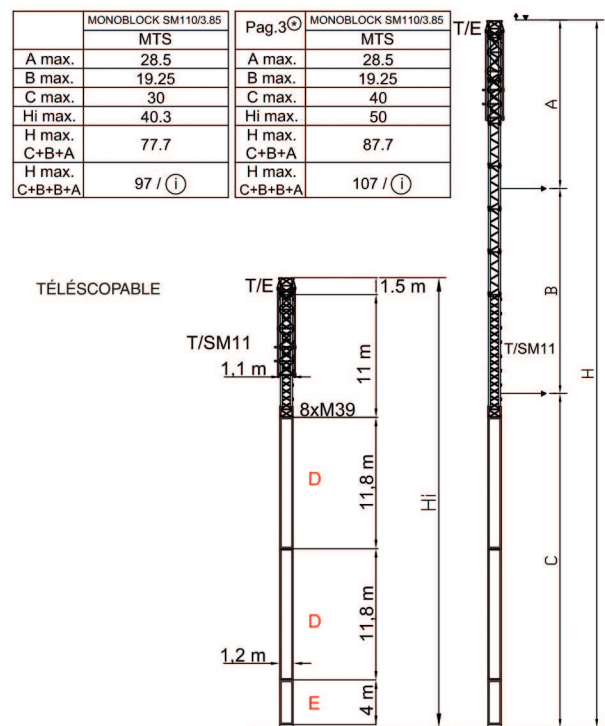
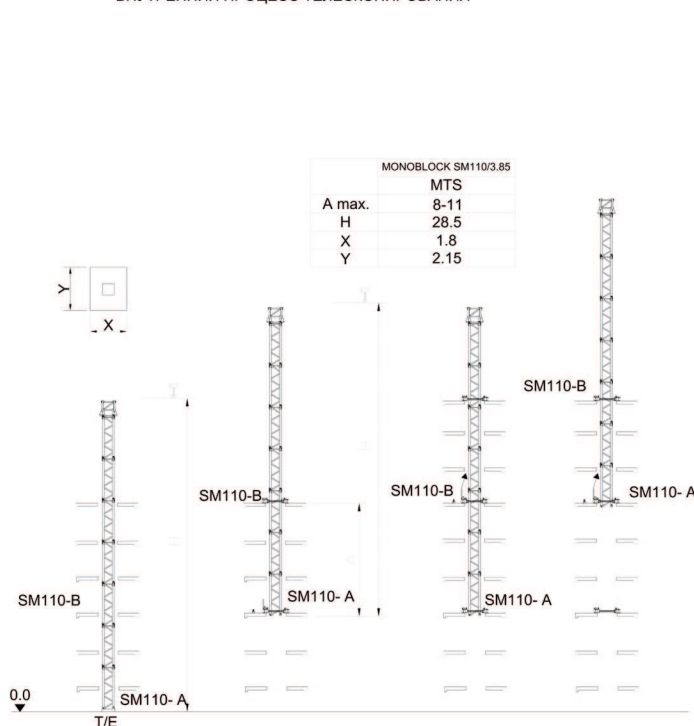
FEM 1005-C25 / EN 14439- Bloque lastre de base- Base ballast block- Grundballastblöcke - Bloc de lest de base- Blocco di zavorra alla base - Балласты опорной рамы




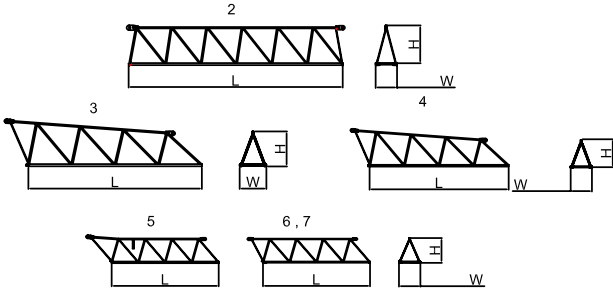
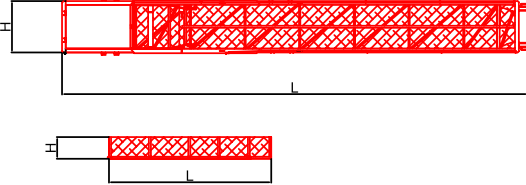


Proceso de trepado- External climbing- Kletterkrane- Telescopable- Sopralzo idraulico - Процесс наращивания крана



TREPADO INTERNO / BOTTOM CLIMBING CRANE / KLETTERKRANE IM GEBÄUDE / TÉLESCOPAGE SUR DALLES / GRU CLIMBING / ВНУТРЕННИЙ ПРОЦЕСС ТЕЛЕСКОПИРОВАНИЯ





C25-TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN / GRUE ANCRÉE / GRU ANCORATA / ВОСХОЖДЕНИЕ Экстерно







Dimensiones y transporte-Dimensions and transport - Abmessungen und Transport-Dimensions et des transporte - Dimensioni e trasporti - Размеры и транспорта

		L(m)	W(m)	H(m)	Peso(Kg)
Pluma tramo primero / First jib section/Ausleger-Anlenkstück / Pied de flèche /Settore articolato di braccio / Корневая секция стрелы 1 	1	11.74	1	1.7	1544
Elemento intermedio de pluma /Intermediate jib section / Ausleger-Zwischenstück Elément interm. de flèche / Spezzone di braccio / Промежуточная секция стрелы 	2 3 4 5 6 7	11.7 6.5 5 5 5 5	1 1 1 1 1 1	1,7 1,3 1,16 1,16 1,16 1,16	1064 502 312 262 206 154
Contrapluma / Counter-jib/Gegenausleger / Contre-flèche/Controbraccio / Консоль противовеса 		11.49 4.05	0.28 0.30	1.28 0.58	1502 96
Bloque de contrapeso / Counterweight blocks/Gegengewichtsblöcke / Bloc de contrepoids Blocco di contrappeso / Плита противовеса 	A B C	2,94 2,94 1,70	0,30 0,18 0,18	1,25 1,25 1,25	2300 1400 850
Bloque lastre de base / Base ballast block/Grundballastblöcke / Bloc de lest de base Blocco di zavorra alla base / Плиты балласта опорной рамы 		4,4	1,2	0,3	3800
Cabeza de torre / Tower head/Turmspitze / Porte - flèche/Testa di torre / Оголовок башни 		2.94	1.8	1.7	2998

	L(m)	W(m)	H(m)	Peso(Kg)	
Elemento de torre / Tower section/Turmstück / Elément de mât Elemento di torre / Башенные секции					
	D	11,8	1,2	1,38	3017
	D	8	1,2	1,38	2075
	D	5,9	1,2	1,38	1560
	D	4	1,2	1,38	1100
	E	11,8	1,2	1,38	3782
	E	8,0	1,2	1,38	2654
	E	5,9	1,2	1,38	2090
	E	4,0	1,2	1,38	1527
	J	10	1,85	1,38	3520
	K	11,8	1,85	1,85	4600
	K	5,9	1,85	1,85	2472
	K	3	1,85	1,85	1425
	L	11,8	1,85	1,85	5520
	M	11,8	1,85	1,85	5670
	N	5,9	2,27	2,27	3500
	O	11,8	2,27	2,27	5044
	O	5,9	2,27	2,27	2640
	O	3	2,27	2,27	1545
	P	11,8	2,27	2,27	5700
	Q	11,8	2,27	2,27	5900
	X	6	2,27	2,29	4000
	T	6	2,27	2,29	4300
	U	6	2,31	2,34	5910
	Z	6	2,61	2,34	5980
Elemento de empotre / Foundation anchor / Fundamentanker / Pieds de scellement / El annegare / Анкерные крепления					
	S51 S52R	1,2	1,38	1,42	496
	S60/8 S60R/16	1,2	1,38	1,42	594
	S60R/16	1,85	1,85	1,6	956
	S70/8	1,85	1,85	1,6	1108
	S70R/16	2,28	2,28	1,6	1122
		2,28	2,28	1,6	1274
	S75R8/20 S75R16/22	0,35	0,35	1,6	1200
	S75R16/26	0,50	0,50	2	2840
	S75R24/26	0,50	0,50	2,4	3160
		0,50	0,50	2,4	3400
	DIMA	2,31	2,34	0,8	1650
Gancho y Carro / Hook and Trolley/Lasthaken - Laufkatze / Crochet - Chariot Gancio e Carrello / Крюк и грузовая тележка					
		0,75	0,12	1,4	164
		0,96	1,10	0,62	184
Cabina y soporte / Cabin and platform / Kabine und wartungs / Cabine et support / Cabina e supporto / Кабина с основой					
		3,00	1,15	2,35	558

	L(m)	W(m)	H(m)	Peso(Kg)
Tramo trepador SM110 / Climbing tower section / Turmstück/ Mâtüre télescopable / / Elemento di torre monolitico / Монтажная секция башни 	4.09	1,17	1,22	1290
Jaula de telescopaje SM110 / Climbing cage / Hydraulikbühne/Cage de télescage / Gabbia di montaggio / Монтажная обойма  Completa / Full / Vollständige/Complete / completa / полный Estructura / Steel frame / Struktur/ Construction / Struttura / структура Hidraulico y accesorios / Hydraulic and accessories/ Hydraulik-und Zubehör hydraulique et accessoires / idrauliche ed accessori / Гидравлические и аксессуары	8.1	1,7	1,92	3840 2425 1415
Tramo de transición SM110-1.2/1.09 / Climbing connection frame / Turmstück Elément de transition / Telaio di raccordo a spinta / Переходная секция башни 	11.2	1,38	1.21	3695
Tramo de enlace a cabina SM110-1.09/1.2 /Climbing cage connection frame / Turmstück Elément de connection pour la cage de télescage / Telaio di raccordo a spinta / Секция башни для соединения с кабиной 	1,5	1,65	1.65	875
Tramo trepador SM110 - A / Climbing tower section / Turmstück/ Mâtüre télescopable / / Elemento di torre monolitico / Монтажная секция башни 	4.09	1,17	1,22	1900
Tramo trepador SM110 - B / Climbing tower section / Turmstück/ Mâtüre télescopable / / Elemento di torre monolitico / Монтажная секция башни 	4.09	1,17	1,22	1750

	L(m)	W(m)	H(m)	Peso(Kg)
Marco trepado externo / Tie-frame / Cadre d'encrage externe / Sopralzo con ancoraggio esterno / ВНЕШНЯЯ РАМКА ПРИСТЕЖКИ 	1.7	1.7	0.26	720
Marco trepado interno / Floor climbing frame / Cadre d'encrage interne / Sopralzo interno ВНУТРЕННЯЯ РАМКА ПРИСТЕЖКИ 	2.4	2.38	0.45	1503
Hidraulico y accesorios / Hydraulic and accessories/ Hydraulik-und Zubehör hydraulique et accessoires / idrauliche ed accessori / Гидравлические и аксессуары				1100
Viga principal base C38 / Main base beam/Hauptträger für fundamentkreuz Poutre de châssis de base/Trave principale della base / Несущая балка опорной рамы HB600 	5.72	0.67	0.65	1570
Semiviga secundaria base C38 / Half base beam/Halbträger für fundamentkreuz Semipoutre de châssis de base /Semitrave secundaria della base / Вспомогательная балка опорной рамы 	2.77	0.45	0.665	800x2
Viga principal base C45HB / Main base beam/Hauptträger für fundamentkreuz Poutre de châssis de base/Trave principale della base / Несущая балка опорной рамы HB600 	6.66	0.72	0.77	2598
Semiviga secundaria base C45HB / Half base beam/Halbträger für fundamentkreuz Semipoutre de châssis de base /Semitrave secundaria della base / Вспомогательная балка опорной рамы 	3.25	0.58	0.77	1228x2
Base Cruciforme C45HM / Crossbase C45HM / Fundamentkreuz C45HM / Châssis C45HM / Carro base C45HM 	6.7	1.1	1.2	5750
Vigas auxil. de base / Half base beams / Halbträger für fundamentkreuz / Semipoutre de châssis de base / Travi di congiunzi di congiunzione 	4.4	0.3	0.55	220x2



40" HC x 3 - HBG 39.7 mt



x 2 - HBG 24 mt



MANUFACTURER:

GRUAS SÁEZ, S.L.
 Ctra. de Beniaján, Km. 5
 30570 Beniaján (Murcia) Spain
 Tel. (+34) 968 10 28 84

info@gruassaez.com
 www.gruassaez.com

DECLINAMOS TODA RESPONSABILIDAD DERIVADA DE LA INFORMACION PROPORCIONADA.
 This information is supplied without liability.
 Sämtliche Angaben erfolgen ohne Gewähr.
 Ces renseignements sont sans garantie.
 Le indicazioni contenute si intendono salvo errori ed omissioni.

ESPECIFICACIONES SUJETAS A MODIFICACIONES SIN PREVIO AVISO.
 Specifications subject to modification without notice.
 Obiges kann ohne berstaendigung geaendert werden.
 Specifications susceptibles de modification sans avis préalable.
 Specifiche suscettibili di variazioni senza preavviso