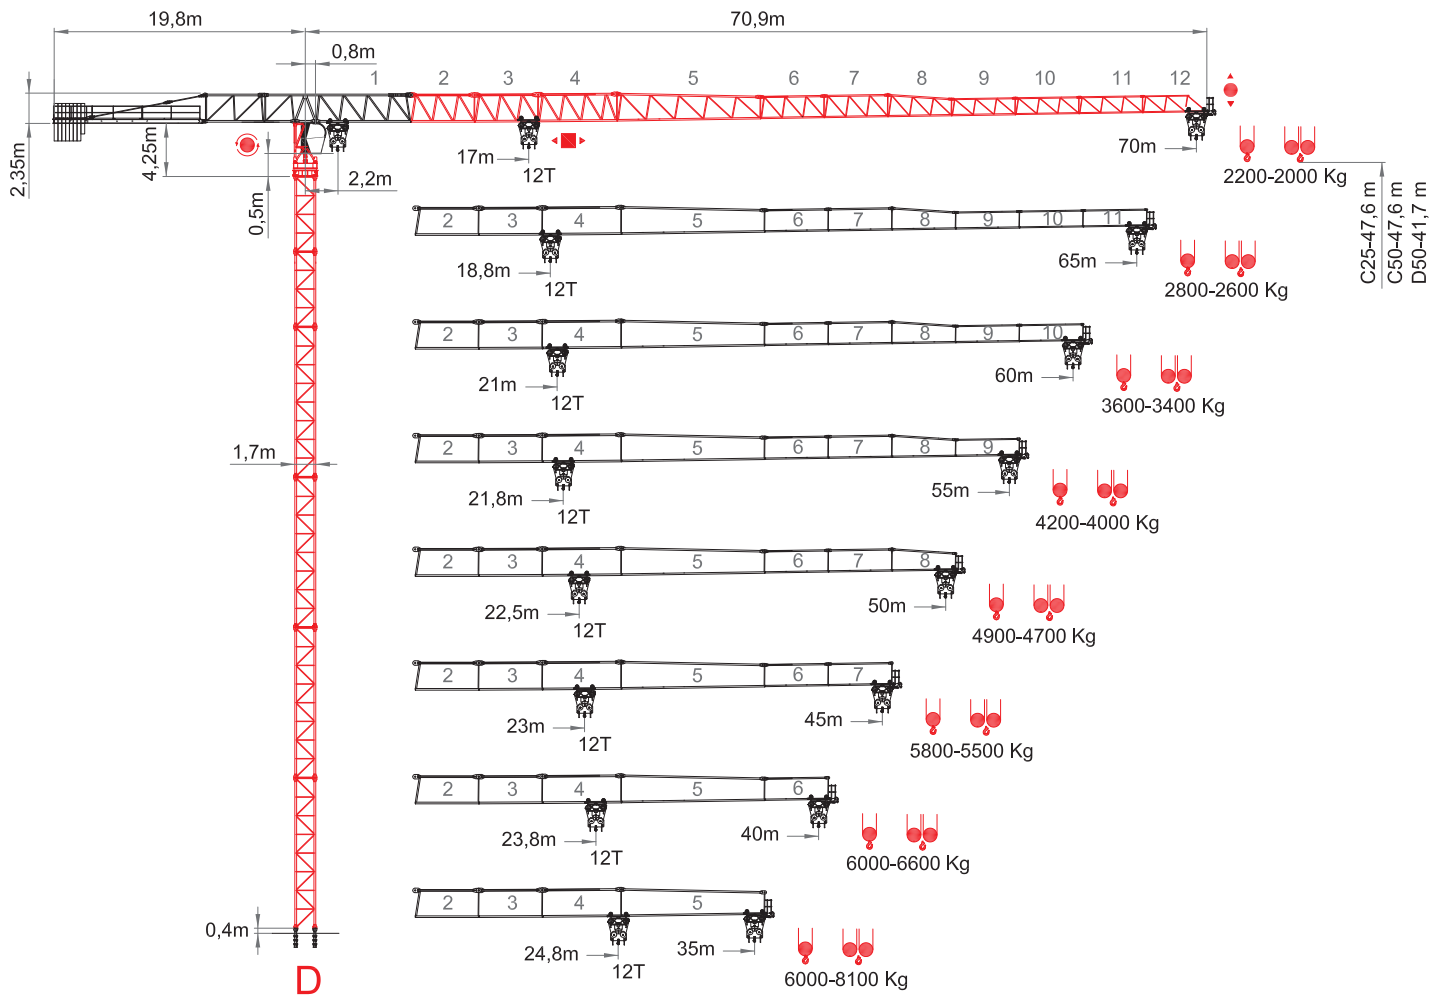


Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - График грузоподъёмности

70 m

15	20	25	30	31,4	35	40	45	50	55	60	65	70	m
6000	6000	6000	6000	6000	5300	4520	3910	3430	3040	2710	2440	2200	Kg
15	20	25	30	30,8	35	40	45	50	55	60	65	70	m
6000	6000	6000	6000	6000	5150	4350	3740	3250	2850	2520	2240	2000	Kg
15	17	20	25	30	35	40	45	50	55	60	65	70	m
12000	12000	10010	7720	6210	5150	4350	3740	3250	2850	2520	2240	2000	Kg

65 m

15	20	25	30	34,9	35	40	45	50	55	60	65	m
6000	6000	6000	6000	6000	5980	5110	4440	3910	3470	3110	2800	Kg
15	20	25	30	34,1	35	40	45	50	55	60	65	m
6000	6000	6000	6000	6000	5820	4940	4260	3720	3280	2910	2600	Kg
15	18,8	20	25	30	35	40	45	50	55	60	65	m
12000	12000	11210	8670	7000	5820	4940	4260	3720	3280	2910	2600	Kg

60 m

15	20	25	30	35	39,1	40	45	50	55	60	m
6000	6000	6000	6000	6000	6000	5860	5100	4500	4010	3600	Kg
15	20	25	30	35	38,2	40	45	50	55	60	m
6000	6000	6000	6000	6000	6000	5680	4920	4310	3810	3400	Kg
15	20	21	25	30	35	40	45	50	55	60	m
12000	12000	12000	9870	8000	6670	5680	4920	4310	3810	3400	Kg

55 m

15	20	25	30	35	37	40,7	45	50	55	m
6000	6000	6000	6000	6000	6000	6000	5340	4710	4200	Kg
15	20	25	30	35	39,6	40	45	50	55	m
6000	6000	6000	6000	6000	6000	5940	5150	4520	4000	Kg
15	20	21,8	25	30	35	40	45	50	55	m
12000	12000	12000	10290	8350	6970	5940	5150	4520	4000	Kg

50 m

15	20	25	30	35	40	42	45	50	m
6000	6000	6000	6000	6000	6000	6000	5550	4900	Kg
15	20	25	30	35	40	40,9	45	50	m
8000	8000	8000	6000	6000	6000	6000	5350	4700	Kg
15	20	22,5	25	30	35	40	45	50	m
12000	12000	12000	10670	8660	7230	6170	5350	4700	Kg

45 m

15	20	25	30	35	40	43,7	45	m
6000	6000	6000	6000	6000	6000	6000	5800	Kg
15	20	25	30	35	40	41,8	45	m
6000	6000	6000	6000	6000	6000	6000	5500	Kg
15	20	23	25	30	35	40	45	m
12000	12000	12000	10930	8880	7420	6340	5500	Kg

40 m

10	15	20	25	30	35	40	m
6000	6000	6000	6000	6000	6000	6000	Kg
15	20	25	30	35	37	40	m
6000	6000	6000	6000	6000	6000	6000	Kg
15	20	23,8	25	30	35	40	m
12000	12000	12000	11360	9230	7720	6600	Kg

35 m

10	15	20	25	30	35	m
6000	6000	6000	6000	6000	6000	Kg
10	15	20	25	30	35	m
6000	6000	6000	6000	6000	6000	Kg
15	20	24,8	25	30	35	m
12000	12000	12000	11890	9670	8100	Kg

Bloque de contrapeso - Counterweight blocks - Gegengewichtsblöcke - Bloc de contrepoid - Blocco di contrappeso - Плиты противовеса

	70 m		65 m		60 m		55 m	
	A	B	A	B	A	B	A	B
	7	1	7	1	7	1	6	2
	20750 Kg		20750 Kg		20750 Kg		19500 Kg	

	50 m		45 m		40 m		35 m	
	A	B	A	B	A	B	A	B
	5	3	5	2	4	3	4	2
	18250 Kg		16750 Kg		15500 Kg		14000 Kg	

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

56 Hp (42Kw) - INV
400 V / 50-60 Hz
H.B.G. 150m S/R Ø16

5 Hp (42Kw) - INV												
400 V / 50-60 Hz												
B.G. 150m S/R Ø16												
		m/min	0— 5	0— 35	0— 48	0— 73	0— 107	0— 2,5	0— 17,5	0— 24	0— 36,5	0— 53,5
	400 m	Kg	6000	6000	4000	2500	1250	12000	12000	8000	5000	2500
		Kw	42	42	42	42	42	42	42	42	42	42

75 Hp (55Kw) - INV
400 V / 50-60 Hz
H.B.G. 150m S/R Ø16

10 Hp (55Kw) - INV												
50 V / 50-60 Hz												
B.G. 150m S/R Ø16												
		m/min	0— 5	0— 44	0— 60	0— 85,5	0— 118	0— 2,5	0— 22	0— 30	0— 42,7	0— 59
	400 m	Kg	6000	6000	4000	2500	1250	12000	12000	8000	5000	2500
		Kw	55	55	55	55	55	55	55	55	55	55

	m/min	11 / 37 / 100		
	Kw	11		
	r.p.m.	0,3	0,6	0,9
	Nm	2 x 65		
	m/min	12 / 24		
	Kw	4 x 3		

		400 V	100m	GENERADOR	POTENCIA
2000/14/CEE	2006/95	50 Hz	4x35mm2	170 kVA	INSTALADA
2005/88/CEE	/CEE				80 KW

		380 V	100m	*Opcional
2000/14/CEE	2006/95	60 Hz	4x35mm2	
2005/88/CEE	/CEE			

* Opcional / Optional / Opzionale

 Elevación / Hoisting / Heben / Levage / Sollevamento

 Distribución / Trolleying / Katzfahren / Distribution / Distribuzione


 Orientación / Slewing / Schwenken / Orientation / Rotazione



 Traslacion / Travelling / Schienenfahren / Translation / Traslazione

 Cable / Rope / Seil / Câble / Fune

FEM 1005-C25-C50-D50 / EN 14439 - Mástil / Reacciones - Masts / Reactions - Mast / Eckdrücke - Mat / Réactions - Torre / Réazioni - Реакции / Комплектация башни

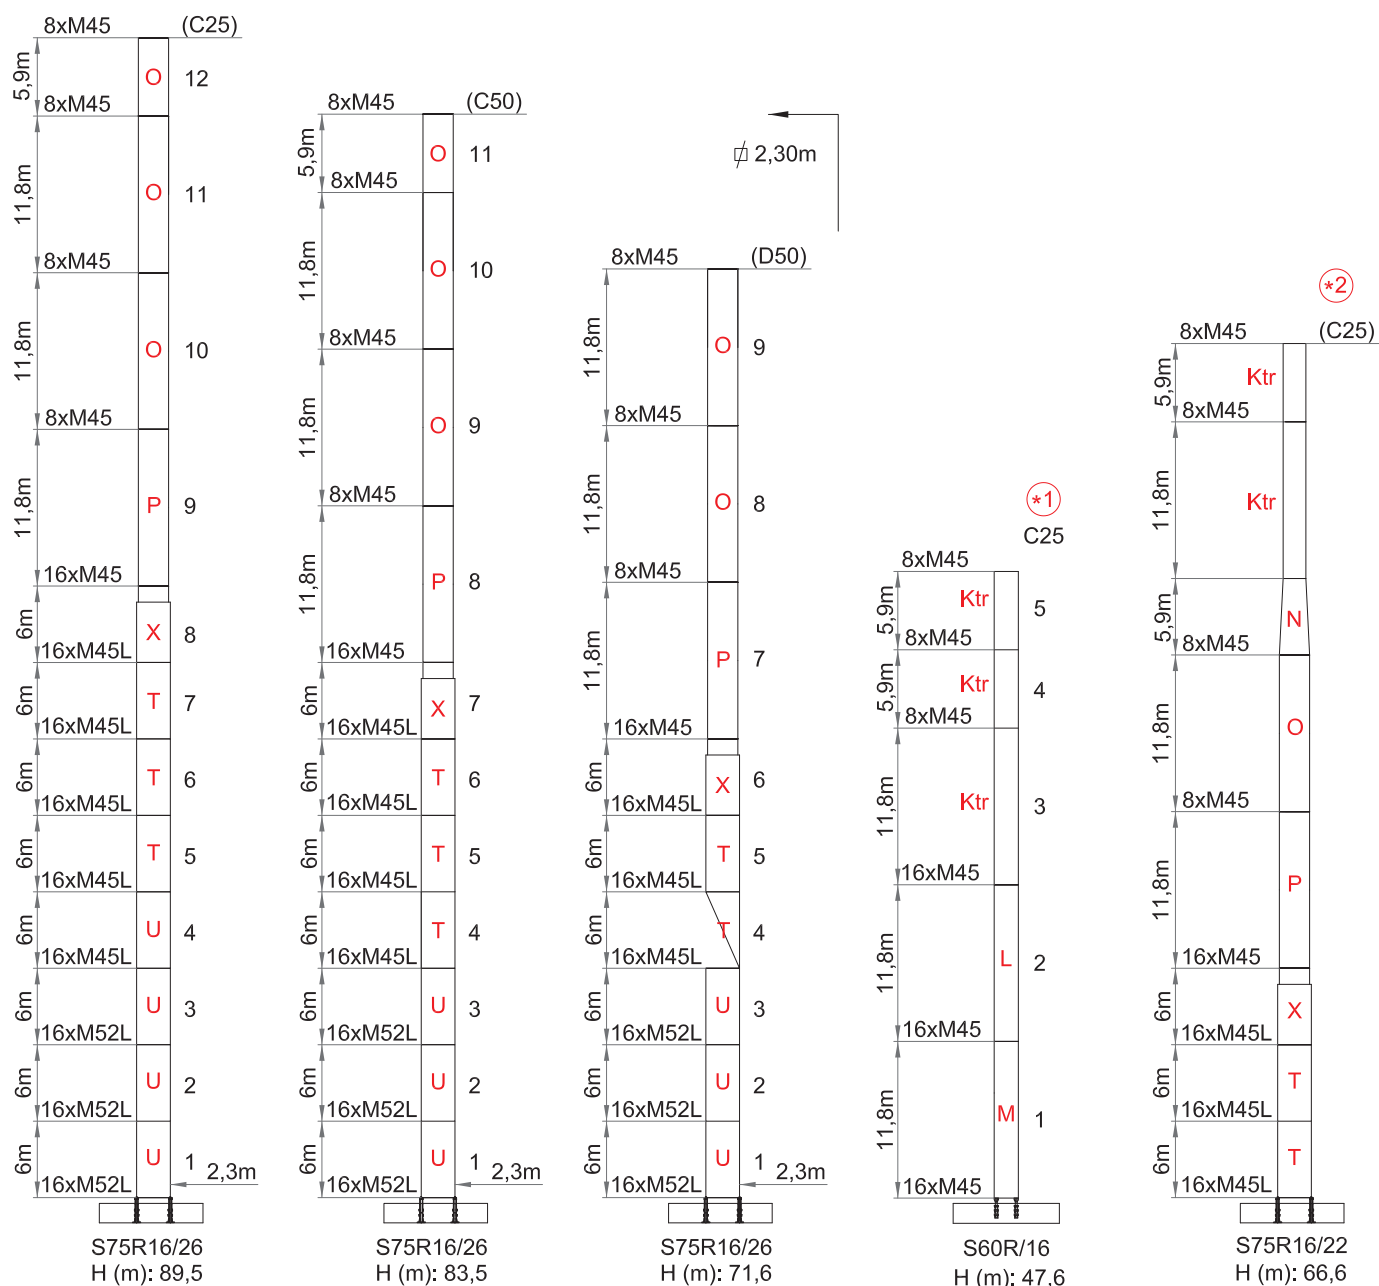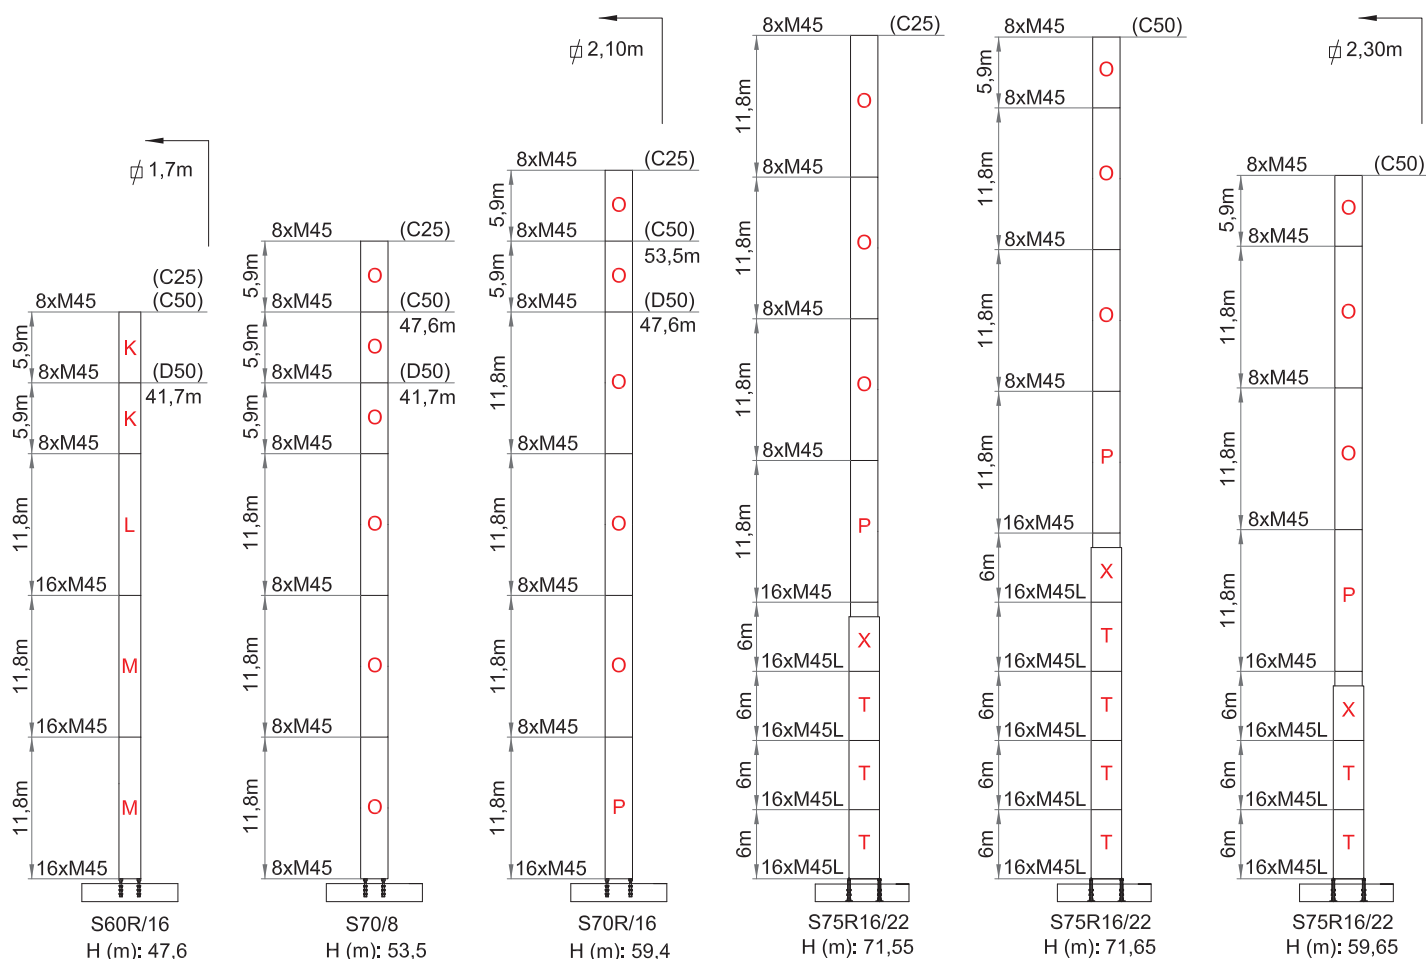K = S17 8/8
L = S17 16/8
M = S17 16/16
N = S21-S17 8/8
O = S21 8/8
P = S21 16/8
T = S2322 16/16 M45L
U = S2326 16/16 M52L
X = C2322/21






		M	O	P	T	U
C 25	H (m)	47,60	53,50	59,40	71,55	89,50
	M (T·m)	503,5	563,7	648,2	933	1545,5
	T (t)	9,44	10,46	14,49	17,71	24,6
	P (t)	67,86	73,82	79,47	93,32	115,92
	R ₁ (t)	221,9	187,6	215,1	298,5	504
	R ₂ (t)	252,7	221,1	254,9	345,1	562

		M	O	P	T	U
C 50	H (m)	47,60	47,60	53,50	71,65	83,50
	M (T·m)	503,5	488,4	582,2	1070,9	1469,3
	T (t)	9,44	9,48	14,64	20,27	24,34
	P (t)	67,86	64,83	76,77	95,42	109,62
	R ₁ (t)	221,9	162,3	191,9	345,5	479,4
	R ₂ (t)	252,7	191,8	230,3	393,2	534,2

		M	O	P	T	U
D 50	H (m)	41,70	41,70	47,60	59,65	71,60
	M (T·m)	482,2	486,9	640,8	981,1	1414,5
	T (t)	15	15,5	17,45	21,57	27,18
	P (t)	69,51	72,17	74,07	85,02	101,32
	R ₁ (t)	209,9	158,5	213,8	317,1	462,5
	R ₂ (t)	244,6	194,6	250,8	359,6	513,2


FEM 1005-C25-C50-D50 / EN 14439 - Bloque lastre de base - Base ballast block - Grundballastblöcke - Bloc de lest de base - Blocco di zavorra alla base - Балласты опорной рамы



C25	H (m)	19,4 m	25,3 m	31,2 m	37,1 m	43 m	48,9 m
	R1 (t)	63,6 t	68,4 t	74,1 t	81,8 t	89,3 t	99,8 t
	Z (t)	53,2 t	53,2 t	68,4 t	83,6 t	98,8 t	121,6 t

C50	H (m)	19,4 m	25,3 m	31,2 m	37,1 m	43 m	-
	R1 (t)	63,6 t	68,4 t	73,9 t	82 t	91,3 t	-
	Z (t)	53,2 t	53,2 t	68,4 t	91,2 t	106,4 t	-


D50	H (m)	19,4 m	25,3 m	31,2 m	37,1 m	-	-
	R1 (t)	63,6 t	69,8 t	78,2 t	89,7 t	-	-
	Z (t)	53,2 t	68,4 t	91,2 t	121,6 t	-	-



C25	H (m)	31,1 m	37 m	42,9 m	48,8 m	54,7 m	60,6 m
	R1 (t)	76 t	81,7 t	90,7 t	100,6 t	127,9 t	157,7 t
	Z (t)	60 t	75 t	95 t	115 t	140 t	170 t

C50	H (m)	25,2 m	31,1 m	37 m	42,9 m	48,8 m	54,7 m
	R1 (t)	71 t	76,1 t	84,2 t	93,2 t	114,4 t	142 t
	Z (t)	50 t	65 t	85 t	105 t	130 t	150 t


D50	H (m)	19,3 m	25,2 m	31,1 m	37 m	42,9 m	-
	R1 (t)	66,7 t	72,5 t	80,7 t	93,2 t	120,8 t	-
	Z (t)	45 t	65 t	85 t	115 t	140 t	-



C25	H (m)	31,6 m	37,5 m	43,4 m	49,3 m	52,2 m	61,1 m
	R1 (t)	76,5 t	82,2 t	91,2 t	101,1 t	128,4 t	158,2 t
	Z (t)	60,5 t	75,5 t	95,5 t	115,5 t	140,5 t	170,5 t

C50	H (m)	25,7 m	31,6 m	37,5 m	43,2 m	49,3 m	55,2 m
	R1 (t)	71,5 t	76,6 t	84,7 t	93,7 t	114,9 t	142,5 t
	Z (t)	50,5 t	65,5 t	85,5 t	105,5 t	130,5 t	150,5 t

D50	H (m)	19,8 m	25,7 m	31,6 m	37,5 m	43,4 m	-
	R1 (t)	67,2 t	73 t	81,2 t	93,7 t	121,3 t	-
	Z (t)	45,5 t	65,5 t	85,5 t	115,5 t	140,5 t	-




C25	H (m)	31,7 m	37,6 m	43,5 m	49,4 m	55,3 m	61,2 m
	R1 (t)	76,6 t	82,3 t	91,3 t	101,2 t	128,5 t	158,3 t
	Z (t)	60,6 t	75,6 t	95,6 t	115,6 t	140,6 t	170,6 t

C50	H (m)	25,8 m	31,7 m	37,6 m	43,5 m	49,4 m	55,3 m
	R1 (t)	71,6 t	76,7 t	84,8 t	93,8 t	115 t	142,6 t
	Z (t)	50,6 t	65,6 t	85,6 t	105,6 t	130,6 t	150,6 t

D50	H (m)	19,9 m	25,8 m	31,7 m	37,6 m	43,5 m	-
	R1 (t)	67,3 t	73,1 t	81,3 t	93,8 t	121,4 t	-
	Z (t)	45,6 t	65,6 t	85,6 t	115,6 t	140,6 t	-

Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

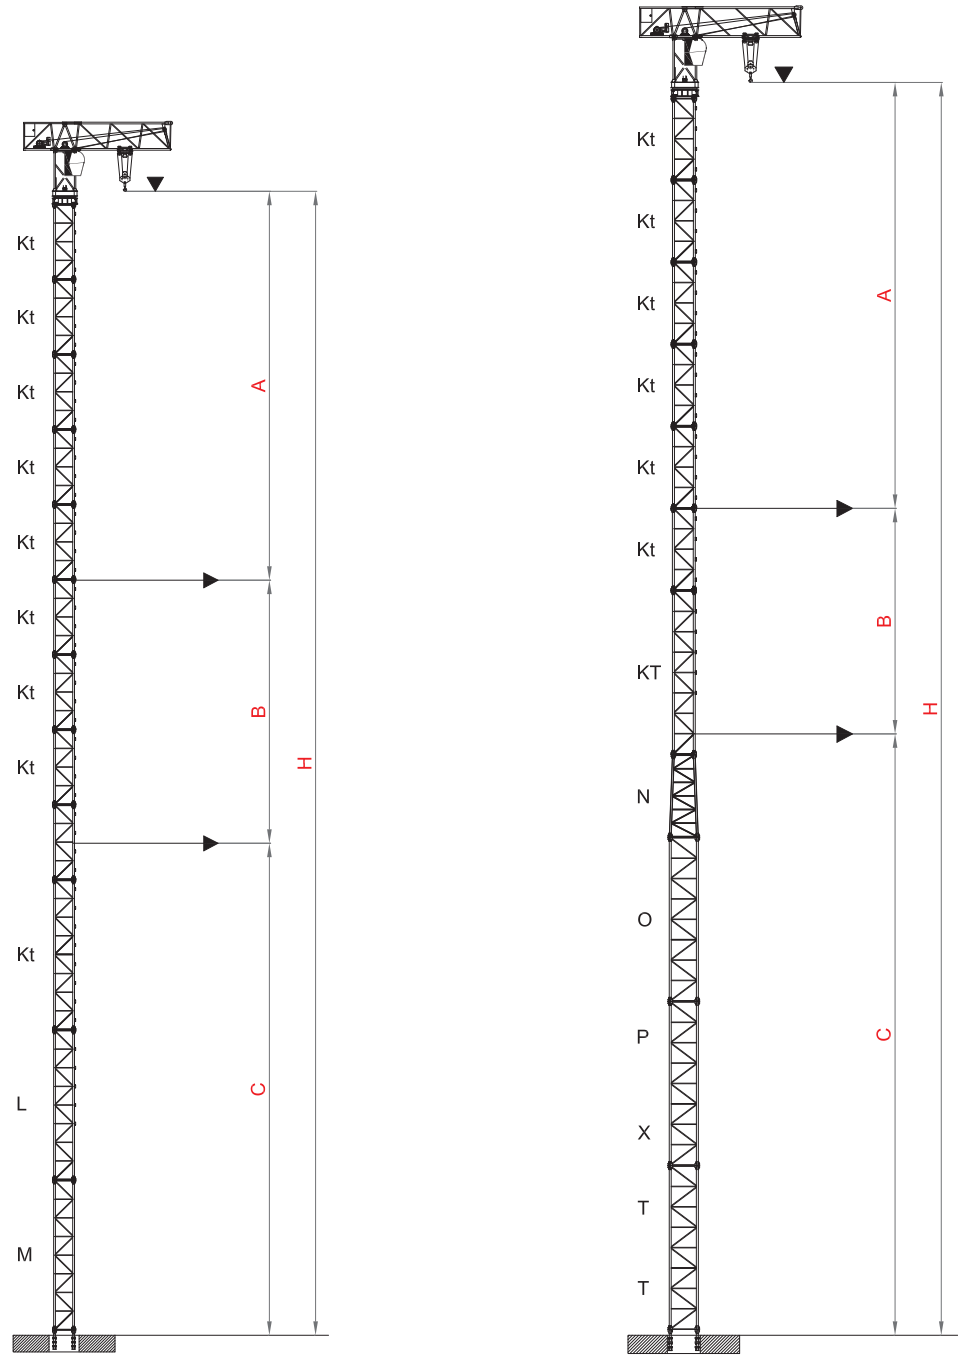TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN /
 GRUE ANDRÉE / GRU ANCORATA / ВОСХОЖДЕНИЕ ЭКСТЕРНО




PAGINA 4	MONOBLOCK K/5,9 m
*1	
A max.	30,6 m
B max.	17,7 m
C max.	34,2 m
Hi max.	47,6 m
H max.	82,5 m
C+B+A	
H max.	100,2 m / i
C+B+B+A	

PAGINA 4	MONOBLOCK K/5,9 m
*2	
A max.	30,6 m
B max.	17,7 m
C max.	51,8 m
Hi max.	66,6 m
H max.	100,1 m
C+B+A	
H max.	117,8 m / i
C+B+B+A	











i Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage -
 Другие высоты подъема и наращивание крана по запросу

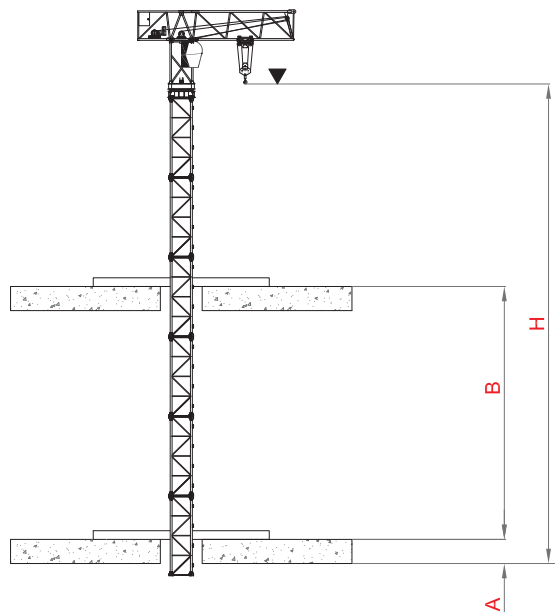TREPADO INTERNO / BOTTOM CLIMBING CRANE / KLETTERKRANE IM GEBÄUDE / TÉLESCOPAGE SUR DALLES /
GRU CLIMBING / ВНУТРЕННИЙ ПРОЦЕСС ТЕЛЕСКОПИРОВАНИЯ




















① Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage -
Другие высоты подъема и наращивание крана по запросу

Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transports - dimensioni e trasporti - Размеры и транспорта

	L(m)	W(m)	H(m)	Peso(Kg)		
Pluma tramo primero / Jib heel section / Ausleger-Anlenkstück / Pied de fleche / Settore articolato di braccio / Корневая секция стрелы		11,8	1,63	2,36	5700	
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Elément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы	Nº 2, Nº 3  Nº 4  Nº 5  Nº 6, Nº 7  Nº 8  Nº 9,10,11  Nº 12 	2 3 4 5 6 7 8 9 10 11 12	5,35 5,35 6,55 5,3 5,3 5,26 5,25 5,21 5,18 5,15 5,11	1,50 1,50 1,50 1,50 1,50 1,50 1,50 1,50 1,50 1,50 1,50	2,30 2,30 2,30 2,30 1,84 1,84 1,84 1,42 1,42 1,42 1,42	1645 1425 1510 2000 770 675 620 425 395 305 255
Gancho, Carro y Puntera / Hook, Trolley and jib head / Lasthaken - Laufkatze-Cabeça de Lança / Crochet - Chariot-Pointe de fleche / Gancio - Carrello e Punta freccia / Крюк и грузовая тележка	     	2,44 1,24 0,93	1,65 0,64 1,7	1,58 1,75 1,42	390 750 200	
Contrapluma 1 / Counter-jib 1 / Gegenausleger 1 / Contre-fleche 1 / Controbraccio 1 / Консоль противовеса 1		5,00	1,90	2,32	2600	
Contrapluma 2 / Counter-jib 2 / Gegenausleger 2 / Contre-fleche 2 / Controbraccio 2 / Консоль противовеса 2		11,94	1,80	0,60	2575	

		L(m)	W(m)	H(m)	Peso(Kg)
Bloque de contrapeso / Counterweight blocks / Gegengewichtsblöcke / Bloc de contrepoids / Blocco di contrappeso / Плита противовеса					
<					

	L(m)	W(m)	H(m)	Peso(Kg)
Viga principal base C60HB / Main base beam C60HB / Hauptträger für fundamentkreuz C60HB / Poutre de châssis de base C60HB / Trave principale della base C60HB / Несущая балка опорной рамы C60HB 	8,65	0,78	0,92	4300
Semiviga secundaria base C60HB / Half base beam C60HB / Halbträger für fundamentkreuz C60HB / Semipoutre de châssis de base C60HB / Semitrave secondaria della base C60HB 	4,27	0,68	0,97	2025
Niveladores / Levellers / Spindel pyramide / Niveleurs / Piedi regolabile 	1,20	1,20	0,90	250
Traslacion / Travelling bogies / Kranfahren / Traslacion / Traslazione 	1,15	1,25	0,45	505
	1,15	0,25	0,45	450
Jaula de telescopaje tipo K5.9 / Climbing cage type K5.9 / Hydraulikbühne K5.9 / Cage de telescopage type K5.9 / Gabbia di montaggio K5.9 / Монтажная обойма K5.9 K-5.9	11,2	2,1	2,1	8000
Completa / Full / Vollständige / Complete / completa / полный 				6490
Estructura / Steel frame / Struktur / Construction / Struttura / структура K-5.9				1510
Hidraulico y accesorios / Hydraulic and accessories / Hydraulik-und Zubehör / hydraulique et accessoires / idrauliche ed accessori / Гидравлические и аксессуары				
Tramo trepador Ktr / Tower section Ktr / Turmstück Ktr / Élément de mât Ktr / Elemento di torre Ktr / Башенные секции Ktr 	5,9 11,8	1,85 1,85	1,85 1,85	2935 5463

		L(m)	W(m)	H(m)	Peso(Kg)	
Base C60T / Crossbase C60T / Fundamentkreuz C60T / Châsis C60T / Carro base C60T						
		9	0,72	0,83	2604	
		4,38	0,67	0,83	930	
		5,38	0,28	0,28	560	
		6	2,27	2,29	5900	
		0,65	0,65	0,45	315	
Bloque lastre de base C60T / Base ballast block C60T / Grundballastblöcke C60T / Bloc de lest de base C60T / Blocco di zavorra alla base C60T / Плиты балласта опорной рамы						
		5,8	1,5	0,43	8000	
		4	1,5	0,43	4900	
		3,5	1,5	0,43	4200	
Marco trepado externo / Tie-frame / Cadre d'encrage externe / Sopralzo con ancoraggio esterno / внешняя рамка пристежки						
		2,31	2,31	0,26	950	
Unidad de rotacion / Complete slewing unit / Drehbühne / Orientation / Rotazione / Оголовок башни						
		2,22	1,64	3,28	1950	
		K	2,00	2,00	1,83	5000
		O	2,32	2,32	1,83	6100
		K	2,00	2,00	4,43	6950
		O	2,32	2,32	4,43	8050



40" HC x 8 - HBG 36 m



x 8 - HBG 36 m