

The ACE logo is displayed in a bold, red, sans-serif font within a white rectangular box. The background of the entire advertisement is a photograph of a yellow tower crane against a clear sky. The crane's lattice structure and safety railings are visible, with the operator's cab prominently featured in the center. The text 'TOWER CRANES' is overlaid in large, bold letters, with 'Tower' in black and 'CRANES' in white with a black outline. The ACE logo is repeated on the side of the crane's cab.

ACE

TOWER CRANES




INDIA'S NO. 1
MOBILE & TOWER CRANE CO.

*Nothing beats an **ACE***

Load Capacity


Jib Length 65m	Radius (m)	3.2~15.68	18	20	22	25	28	30	32	35	38	40	42	45	48	50	52	55	58	60	63	65
	Hoisting Load (t)	10.00	8.48	7.47	6.85	5.68	4.92	4.51	4.15	3.68	3.30	3.07	2.87	2.60	2.36	2.22	2.09	1.92	1.76	1.66	1.53	1.45
Jib Length 60m	Radius (m)	3.2~17.2	18	20	22	25	28	30	32	35	38	40	42	45	48	50	52	55	58	60		
	Hoisting Load (t)	10.00	9.48	8.36	7.45	6.38	5.55	5.09	4.69	4.18	3.75	3.50	3.28	2.98	2.72	2.57	2.42	2.23	2.05	1.95		
Jib Length 55m	Radius (m)	3.2~18.27	20	22	25	28	30	32	35	38	40	42	45	48	50	53	55					
	Hoisting Load (t)	10.00	9.04	8.02	6.70	5.99	5.50	5.07	4.53	4.07	3.81	3.57	3.25	2.97	2.81	2.58	2.45					
Jib Length 50m	Radius (m)	3.2~18.88	20	22	25	28	30	32	35	38	40	42	45	48	50							
	Hoisting Load (t)	10.00	9.34	8.35	7.16	6.24	5.74	5.30	4.73	4.26	3.98	3.74	3.41	3.12	2.95							
Jib Length 45m, 40m	Radius (m)	3.2~21.1	22	25	28	30	32	35	38	40	42	45										
	Hoisting Load (t)	10.00	9.55	8.22	7.19	6.61	6.11	5.48	4.95	4.64	4.36	3.95										

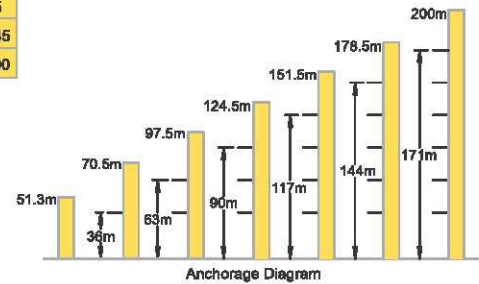

Specifications


Hoisting	No of Falls					
	Speed (m/min)		0 ~ 45	0 ~ 90	0 ~ 22.5	0 ~ 45
	Hoisting Load (t)		5.0	2.5	10.0	5.0
	Power (kw)		45	45	45	45
Slewing			Speed(rpm)		0 ~ 0.6	
			Power(kw)		2 x 5.5	
Trolley			Speed(m/min)		0 ~ 60	
			Power(kw)		5.5	
Climbing			Speed(m/min)		0.6	
			Power(kw)		11	
Main Supply			415V / 50Hz			
Electric Power			61.5kw (76.9kVA)			

Outrigger Stationary




F1	◇ 112t	△ 166t
F2	◇ 66t	△ 86t

Chassis Stationary/Rail Mounted



◇ 58t

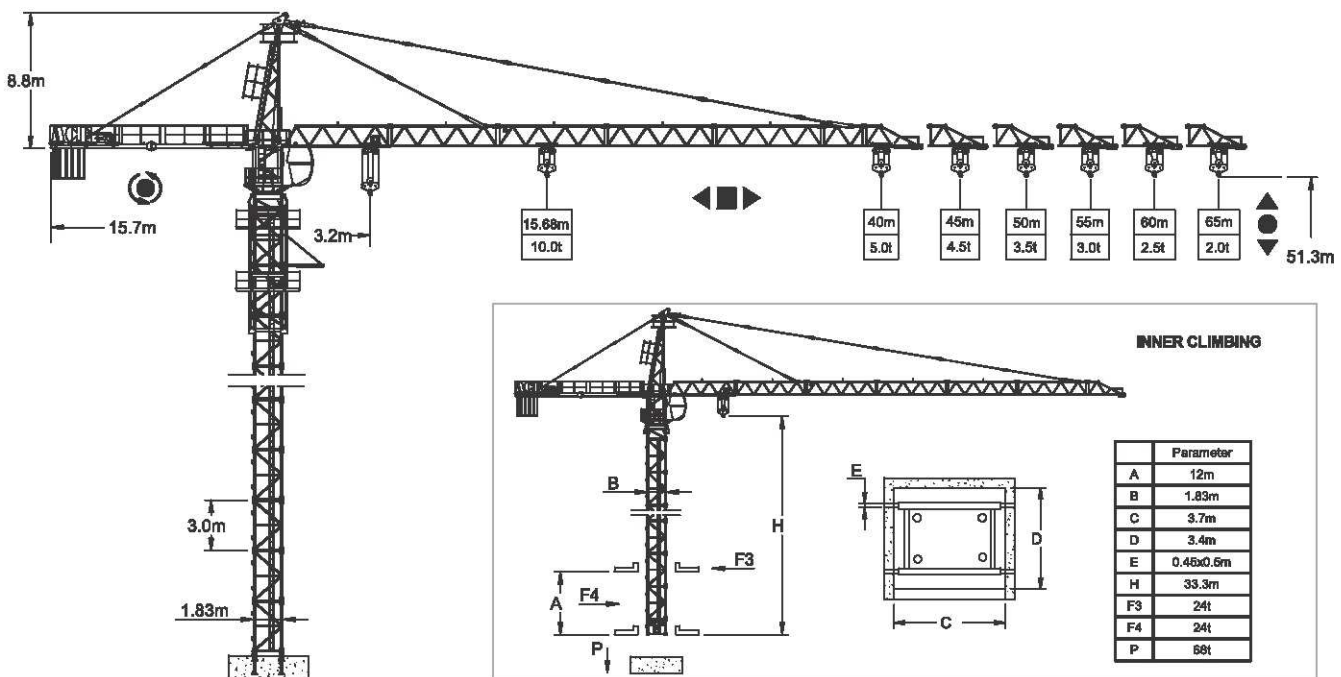


INNER CLIMBING

Parameter	
A	12m
B	1.83m
C	3.7m
D	3.4m
E	0.45x0.5m
H	33.3m
F3	24t
F4	24t
P	68t

F Reaction ◇ In Service △ Out of Service ● Dead weight without load and counter weights but with longest jib and free standing height.
P Vertical Load

ALL INDIA NETWORK

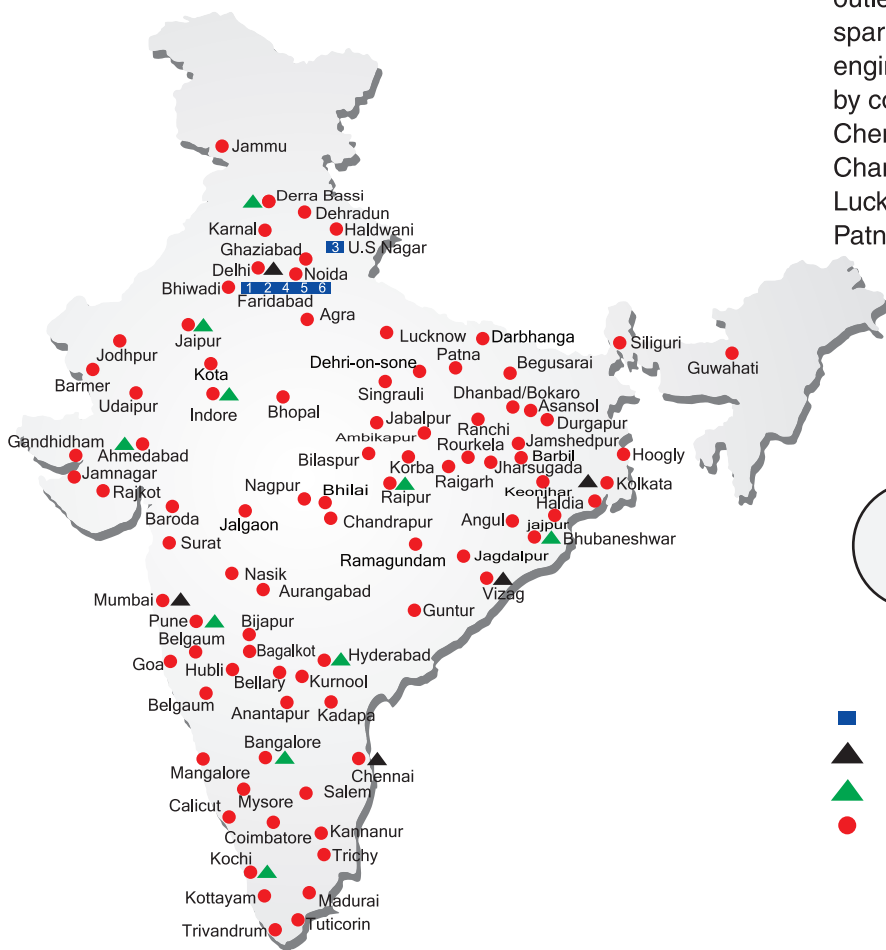

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Cochin.

CUSTOMER CARE

TOLL FREE No

1800 1800 004

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS



ACE

Action Construction Equipment Ltd.

Contact:



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by $\pm 5\%$. Accessories if shown are not part of the Standard Equipment.

MARKETING H.Q.

5th Floor, "TDI Center", Jasola , New Delhi - 25
Ph.: +91-11-40549900 (30 Lines) Fax : 40549922
E-mail: marketing@ace-cranes.com

MUMBAI OFFICE

31, "Kalpataru Court", Chembur, Mumbai - 74
Ph.: 022 - 25206846 Telefax : 25207071
E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Fomra Towers" 84-A, Second Floor, AJC Bose Road,
Kolkatta - 14. Ph. 033-32578307, Telefax: 22274428
E-mail: acekolkatta@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road,
Alwar Pet, Chennai - 18
Ph.: 044 - 24314253 Telefax : 24314252
E-mail: acechennai@ace-cranes.com



www.ace-cranes.com

TC/03/14

Courtesy of Crane.Market