



K4000 TC1

S/N 1561

New phase 5-6

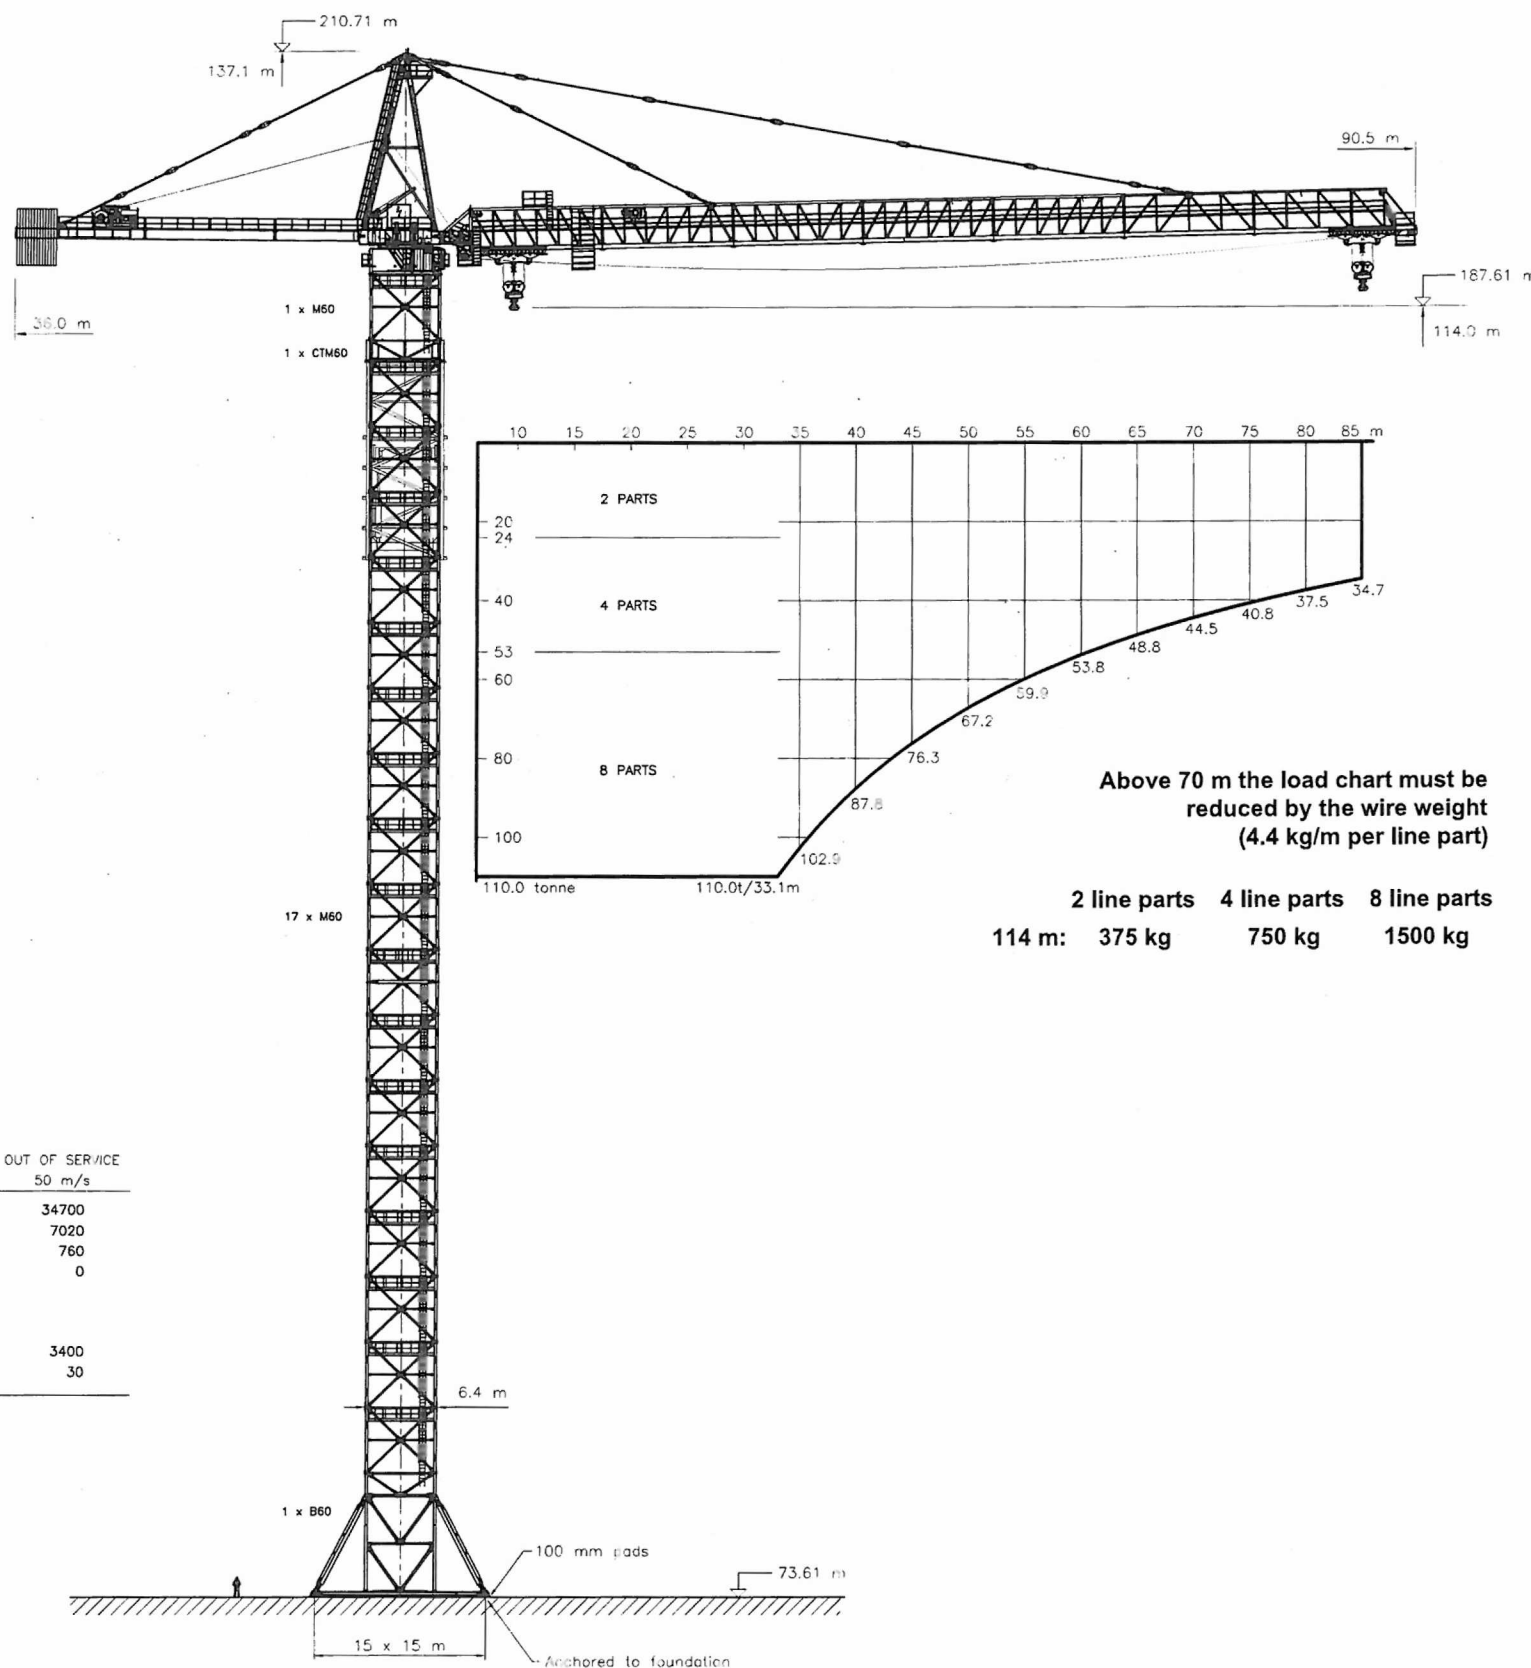

BASE FORCES



Wind speed	IN SERVICE 20 m/s	OUT OF SERVICE 50 m/s
M (kNm)	48110	34700
N (kN)	8320	7020
Q (kN)	215	760
M _T (kNm)	2500	0

Anchored to foundation, no tilloast

Corner compression (kN)	4350	3400
Corner tension (kN)	350	30

PERFORMANCE

HOIST MOTOR : 200 kW		
2 PARTS	0-4 t	0-120 m/min
	4-8 t	0-88 m/min
	8-16 t	0-56 m/min
	16-24 t	0-36 m/min
4 PARTS	0-8 t	0-60 m/min
	8-16 t	0-44 m/min
	16-32 t	0-28 m/min
	32-53 t	0-18 m/min
8 PARTS	0-16 t	0-30 m/min
	16-32 t	0-22 m/min
	32-64 t	0-14 m/min
	64-110 t	0-9 m/min
T	0-50 t	0-60 m/min
	50-110 t	0-30 m/min
T	0-110 t	0-0.4 rpm
T	0-110 t	N/A

3 x 600 V 60 Hz	CONTROL VOLTAGE 24 VDC - 220 VAC
--------------------	-------------------------------------

KWST: 140829 JL	PROJ	KRANTYPE	STK	SAML	TEGN
TEGN: 140829 JL					
CDOK: 140829 JL					
ERSTATTER	SKALA: 1:300	OVERF. A/REAL	OVERFLADE-BEHANDLING:	MATR.:	
ERSTATTET AF:	TOTALVEGT:	kg	ANT. TEGNING: 2 / 6	ANT. STYKL:	
OPRINDELSE:	TRANSPORTAL:	m	TITEL		
			K4000-85 TC1		
KRÖLL CRANES A/S NØRREKRAVLEJ 2 3500 LYNØE DENMARK PHONE: +45 48 187400 FAX: +45 48 188807 www.kröllcranes.com			TEGN. NR.	C1-00.00090800-05	