


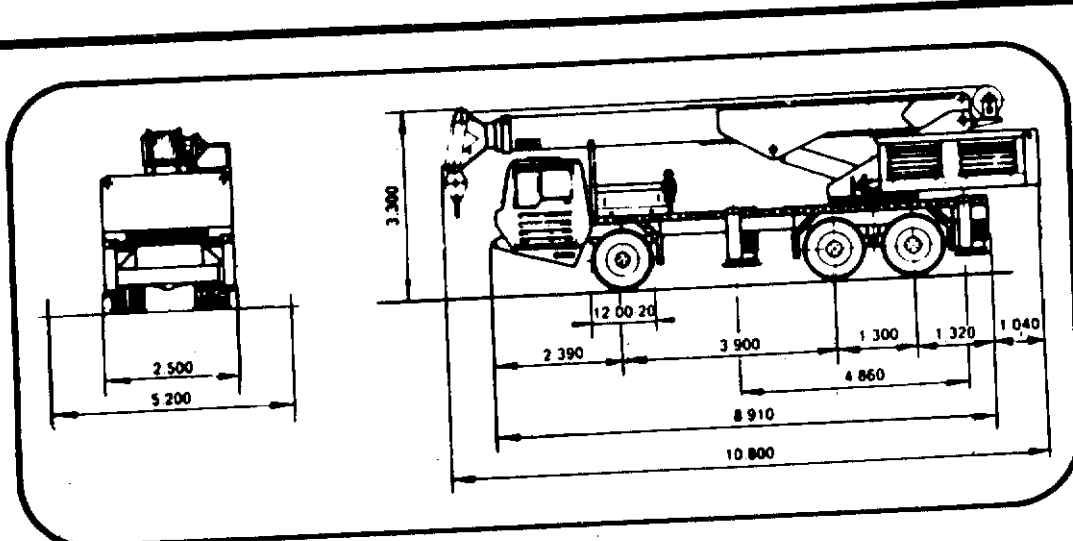

**GRUAS  
ALHAMBRA, S.L.**

**GRUA TIPO: GT-25/28**



**DIAGRAMA DE CARGAS**



Sobre Estabilizadores

Alcance	85 % Lateral y hacia atrás										Plumin auxiliar Celosía	75 % Lateral y hacia atrás										Plumin auxiliar Celosía								
	Longitud de pluma										Longitud de Plumin	Longitud de pluma										Longitud de Plumin								
	9,4 m	12,4 m	15,5 m	18,6 m	21,7 m	24,7 m	27,8 m	30,1 m	40,8 m		9,4 m	12,4 m	15,5 m	18,6 m	21,7 m	24,7 m	27,8 m	30,1 m	40,8 m											
3	25	25	21							25	25	21																		
4	22,30	20,25	18,20	16,20						22,30	20,25	18,20	16,20																	
5	18	16,75	15,50	13,75	12					18	16,75	15,50	13,75	12																
6	14,30	14,10	13	11,75	10,50	9,60				14,30	14,10	13	11,75	10,50	9,60															
7	11	11	10,20	9,80	9,20	8,80	8,10			11	11	10,20	9,80	9,20	8,80	8,10														
8		8,60	8,60	8,60	8,20	7,80	7,40	6,60			8,60	8,60	8,60	8,20	7,80	7,40	6,60													
9		7,10	7,10	7,10	6,80	6,40	6,00	5,15			7,10	7,10	7,10	6,80	6,40	6,00	5,15													
10		5,80	5,80	5,80	5,80	5,40	5,10	4,15	2,10		5,80	5,80	5,80	5,80	5,40	5,10	4,15	2,10												
11			4,90	4,90	4,90	4,90	4,75	4,35	2,35			4,90	4,90	4,90	4,90	4,75	4,35	2,35												
12			4,20	4,20	4,20	4,20	4,20	3,85	2,35			4,20	4,20	4,20	4,20	4,20	3,85	2,35												
13			3,50	3,50	3,50	3,50	3,50	3,20	2,15			3,50	3,50	3,50	3,50	3,50	3,20	2,15												
14			3	3	3	3	3	2,75	1,85			3	3	3	3	3	2,75	1,85												
15			2,50	2,50	2,50	2,50	2,50	2,25	1,85			2,50	2,50	2,50	2,50	2,50	2,25	1,85												
16			2,20	2,20	2,20	2,20	2,20	2,00	1,75			2,20	2,20	2,20	2,20	2,20	2,00	1,75												
17			1,90	1,90	1,90	1,90	1,90	1,70	1,50			1,90	1,90	1,90	1,90	1,90	1,70	1,50												
18				1,70	1,70	1,70	1,70	1,70	1,30				1,70	1,70	1,70	1,70	1,70	1,30												
19				1,55	1,55	1,55	1,55	1,55	1,05				1,55	1,55	1,55	1,55	1,55	1,05												
20					1,45	1,45	1,45	1,45	0,90				1,45	1,45	1,45	1,45	1,45	0,90												
21					1,30	1,30	1,30	1,30	0,75				1,30	1,30	1,30	1,30	1,30	0,75												
22					1,20	1,20	1,20	1,20	0,55				1,20	1,20	1,20	1,20	1,20	0,55												
23					1,05	1,05	1,05	1,05	0,40				1,05	1,05	1,05	1,05	1,05	0,40												
24								0,90										0,90												
25								0,75										0,75												
26								0,60										0,60												

Cargas limitadas por resistencia de la pluma

Cargas limitadas por estabilidad

Los pesos de los ganchos deben reducirse a las cargas indicadas.



# DIAGRAMA DE ALCANCES

